MILITARY SPECIFICATION SHEET


HOSE ASSEMBLY, RUBBER, LIGHTWEIGHT, MEDIUM PRESSURE, FIELD ATTACHABLE END FITTINGS, FLARE TO FLARE, WITH LOCKWIRE HOLE.

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the hose assembly described herein shall consist of this document and the latest issue of specification MIL-H-83796.

FSC 4720

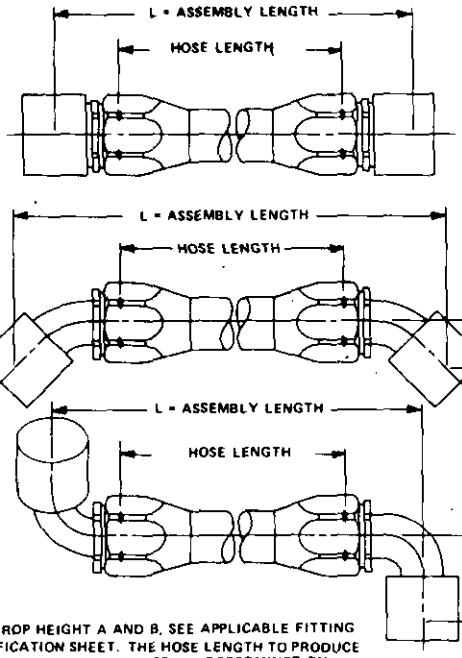Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.



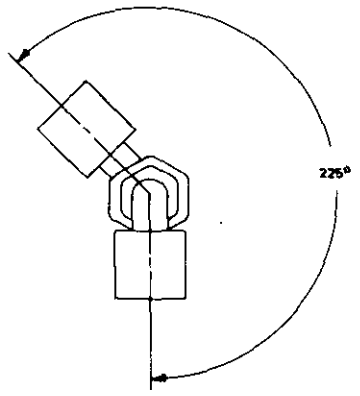FOR DROP HEIGHT A AND B, SEE APPLICABLE FITTING SPECIFICATION SHEET. THE HOSE LENGTH TO PRODUCE A DESIRED ASSEMBLY LENGTH IS DETERMINED BY MEASURING DISTANCE FROM SOCKET GROOVE TO POINT SHOWN IN SKETCHES.




ANGLE BETWEEN ELBOW FITTINGS, WHEN PROJECTED ON A PLANE PERPENDICULAR TO THE HOSE AXIS, SHALL BE SPECIFIED. SIGHTING ALONG THE AXIS OF THE HOSE, THE ANGLE SPECIFIED WILL BE THE ANGLE THAT THE FURTHEST FITTING SHOULD BE ROTATED COUNTERCLOCKWISE. ANGLE WILL BE SPECIFIED IN 5° INCREMENTS. TOLERANCE ON ANGULAR ALIGNMENT, ± 5° ON HOSE LENGTHS UP TO 36 INCHES AND ± 10° ON HOSE LENGTHS OVER 36 INCHES.







LENGTH L TO BE MEASURED BETWEEN CENTERS OF NIPPLE ENDS ALONG A STRAIGHT LINE PARALLEL TO HOSE.
LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.
HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:
UNDER 12 INCHES NOT LESS THAN 1/8-INCH (TOLERANCE ± 1/8 INCH).
12 TO 18 INCHES, NOT LESS THAN 1/4-INCH (TOLERANCE ± 1/8 INCH).
OVER 18 INCHES, NOT LESS THAN 1/2-INCH (TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES, ± 1/4-INCH). (TOLERANCES FOR LENGTHS FROM 36 TO 50 INCHES, ± 1/2-INCH; FOR LENGTHS OVER 50 INCHES, ± 1 PERCENT).

THE PART NO. SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE OD, LENGTH, STYLE AND ANGLE BETWEEN ELBOWS (AS APPLICABLE).

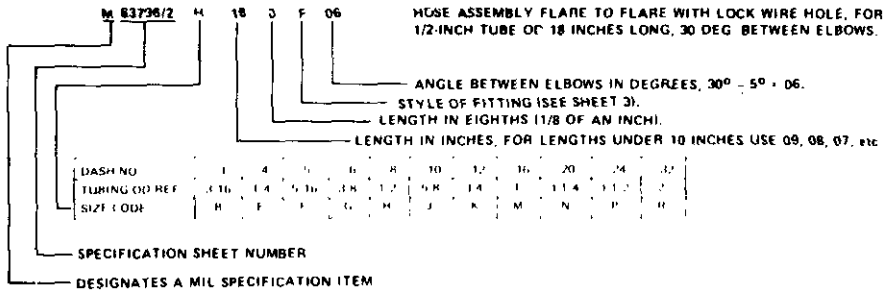EXAMPLES OF PART NO.



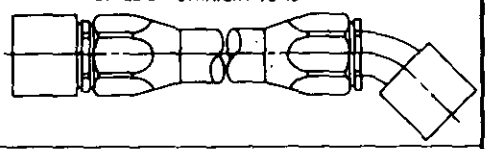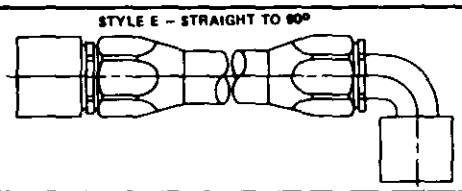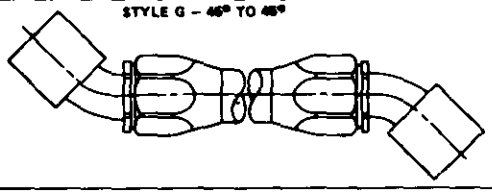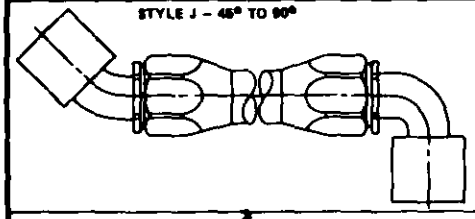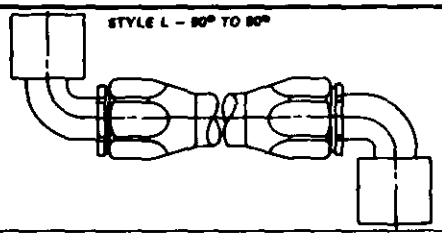Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.

HOSE ASSEMBLY CONFIGURATION FTG NO.1 — FTG NO.2	FITTING ENDS MIL-F-83798 1	 2	MIL-H-83797 HOSE CUT OFF FACTOR (HCOF) INCHES VS HOSE DASH SIZE NO. -3	-4	-5	-6	-8	-10	-12	-16	-20	-24	-32
STYLE A – STRAIGHT TO STRAIGHT  STYLE B – SAME AS STYLE A BUT WITH FIRESLEEVE	MS3798/1	MS3798/1	1.48	1.48	1.52	1.68	1.94	2.10	2.22	2.68	3.08	3.40	4.06
STYLE C – STRAIGHT TO 45°  STYLE D – SAME AS STYLE C BUT WITH FIRESLEEVE	MS3798/1	MS3798/2	1.68	1.81	1.90	2.06	2.28	2.49	2.83	3.37	3.85	4.23	4.94
STYLE E – STRAIGHT TO 90°  STYLE F – SAME AS STYLE E BUT WITH FIRESLEEVE	MS3798/1	MS3798/3	1.53	1.66	1.74	1.91	2.12	2.32	2.70	3.27	3.77	4.17	4.90
STYLE G – 45° TO 45°  STYLE H – SAME AS STYLE G BUT WITH FIRESLEEVE	MS3798/2	MS3798/2	1.88	2.14	2.28	2.44	2.62	2.88	3.44	4.06	4.62	5.08	5.90
STYLE J – 45° TO 90°  STYLE K – SAME AS STYLE J BUT WITH FIRESLEEVE	MS3798/2	MS3798/3	1.73	2.01	2.12	2.29	2.46	2.71	3.31	3.98	4.54	5.00	5.76
STYLE L – 90° TO 90°  STYLE M – SAME AS STYLE L BUT WITH FIRESLEEVE	MS3798/3	MS3798/3	1.98	1.98	1.98	2.14	2.38	2.64	3.18	3.86	4.46	4.94	5.72

NOTES

1. FITTINGS SHALL MATE WITH MS33514, MS33656, OR MS33786 END FITTINGS, AS APPLICABLE.
2. FOR DESIGN AND SIZE OF FITTINGS, SEE CORRESPONDING DASH NUMBER ON APPLICABLE SPECIFICATION SHEET.
3. IDENTIFICATION: SEE PROCUREMENT SPECIFICATION.
4. DIMENSIONS IN INCHES.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

EXAMPLE OF HOSE CUT OFF FACTOR: FOR A -8 TUBE OD, 18-1/2 ASSEMBLY LENGTH, STYLE D. THE BULK HOSE LENGTH= 18.50 MINUS THE HCOF=18.50 –2.69=15.81 BULK HOSE LENGTH NEEDED IS 15.81 INCHES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.

CUSTODIANS:
AIR FORCE – 82
ARMY – AV

REVIEW ACTIVITIES:
ARMY – AT, ME

USER ACTIVITIES:
AIR FORCE – 11

PREPARING ACTIVITY:
AIR FORCE – 82

PROJECT NO. 4720–0363

☆U.S. GOVERNMENT PRINTING OFFICE: 1974-603-480/1946

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:42Z
Check the source to verify that this is the current version before use.