INCH-POUND
MIL-PRF-83755B
27 March 1998
SUPERSEDING
MIL-H-83755A
18 November 1982

PERFORMANCE SPECIFICATION

HOLDER, FLIGHT CHECK LIST

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1 SCOPE

1.1 Scope. This specification covers a scroll-type flight check list holder.

2 APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are cited in sections 3 and 4 of this specification. These lists do not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of these lists, document users are cautioned that they must meet the requirements specified in the documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Standard. The following standard forms a part of this document to the extent specified herein. Unless otherwise specified, the applicable issue of this document is that listed in the specific issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto**,** cited in the solicitation (see 6.2).

STANDARD

Beneficial comments (recommendations, additions, deletions) and any pertinent data that may be of use in improving this document should be addressed to: Resources & Logistics Services Division, SA-ALC/TILDD, 485 Quentin Roosevelt Rd., Kelly AFB, Texas 78241-6425, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1680

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE

MS25036 Terminal, Lug, Crimp Style, Copper, Insulated, Ring Tongue, Bell Mouthed, Type II, Class 1

(Unless otherwise indicated, copies of the above specification is available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the applicable issues of the documents which have been adopted by the DoD are those listed in the specific issue of the DoDISS cited in the solicitation. Unless otherwise specified, the documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z26.1-1966 (R 1973) - Safety Glazing Materials for Motor Vehicles Operating on Land Highways (DoD-adopted)

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

AMERICAN SOCIETY FOR QUALITY CONTROL (ASQC)

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes (DoD-adopted)

(Application for copies should be addressed to American Society for Quality Control, P.O. Box 3066, Milwaukee, WI 53201-3066, or to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B117 - Standard Practice for Operating Salt Spray (Fog) Apparatus (DoD-adopted)

(Application for copies should be addressed to American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3 REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle cost.

3.3 Materials. All materials shall be suitably treated to resist corrosion due to electrolytic decomposition and any atmospheric condition that may be encountered during operational use or storage. The use of toxic chemicals, hazardous substances, or ozone depleting chemicals (ODCs) shall be avoided, whenever feasible.

3.3.1 Lens. The lens shall be fabricated from a clear, colorless and impact resistant material.

3.3.2 Case. The case shall be made of material sufficient to meet all performance requirements of this document.

3.4 Interface.


3.4.1 Electrical wiring and terminals. The flight check list holder shall be wired for 28 Volts direct current (Vdc). There shall be a set of electrical input terminals on each end of the flight check list holder case. Terminals shall accept MS25036 terminal lugs.

3.4.2 Mounting bracket holes. The mounting bracket shall have two 0.19 inch diameter holes for mounting screws on 2 ± 0.03 inch centers placed symmetrically about the center of the mounting bracket. The holes shall be counterbored to a diameter of 0.28 plus 0.03 minus 0.00 inch, and to a depth of 0.16 inch. The counterbored holes shall be on the face of the mounting bracket that folds against the end of the flight check list holder case, as shown in figure 1.

3.4.3 Compatibility with cockpit lighting. The color of the emitted light shall be compatible with the cockpit lighting systems as specified by the procuring activity (see 6.2).

3.5 Components. The flight check list holder shall include a case, lens, and mounting bracket. The flight check list holder shall be furnished as a completely assembled unit as shown in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

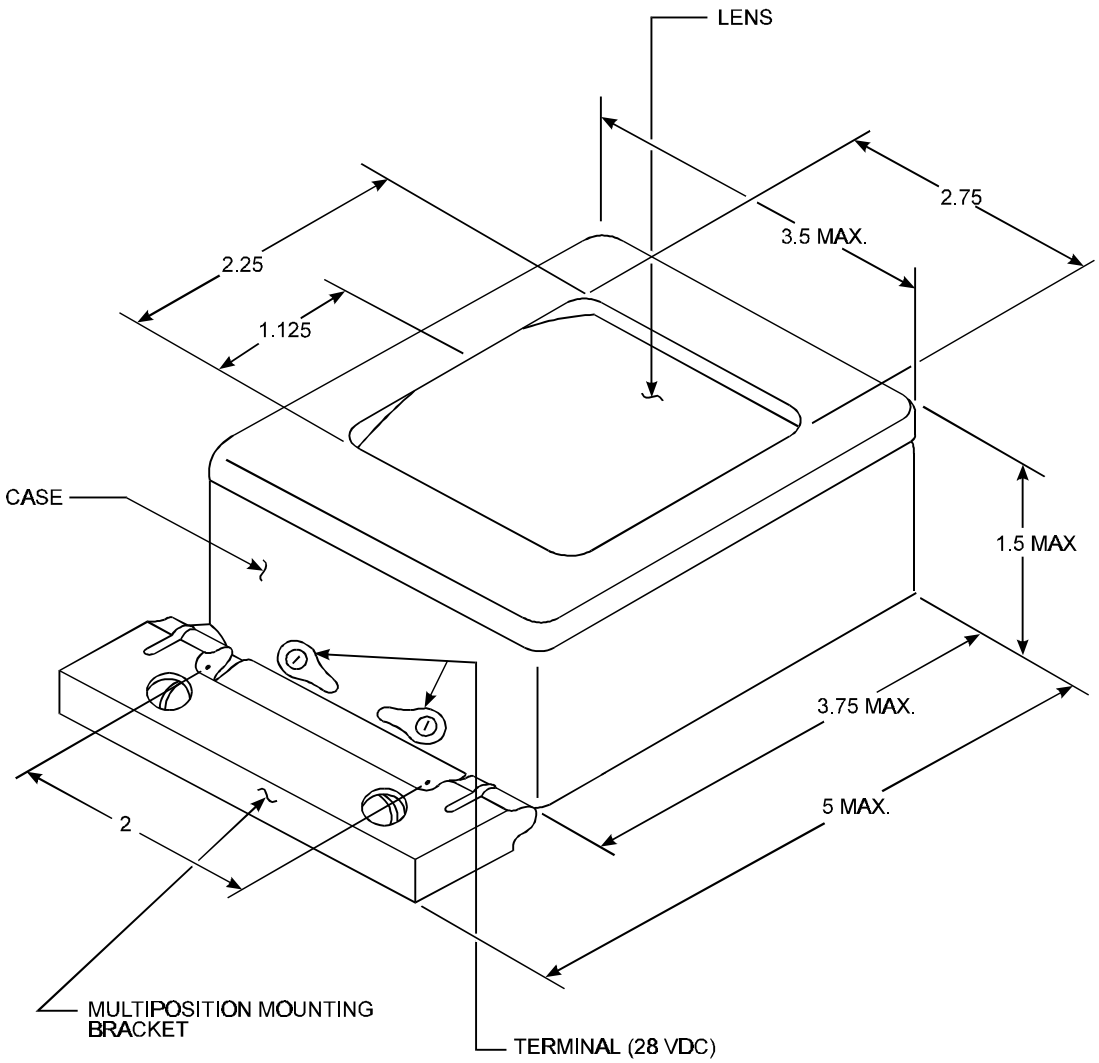

DIMENSIONS IN INCHES,
UNLESS OTHERWISE SPECIFIED.
TOLERANCES: DECIMALS ± 0.02

DIMENSIONS ARE INTERFACE REQUIREMENTS.
ILLUSTRATIVE MATERIAL IS FOR REFERENCE ONLY.

FIGURE 1. Flight Check List Holder

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

3.6 Dimensions. The dimensions of the flight check list holder components shall conform to those listed on figure 1.

3.7 Weight. The weight of the flight check list holder shall be one pound or less.

3.8 Color. The color of the flight check list holder case shall be flat black.

3.9 Performance.

3.9.1 Capacity. The flight check list holder and each roller shall hold a minimum of eight feet of a scroll check list, 2.8 ± 0.1 inches wide and 0.005 inch thick.

3.9.2 Visibility. Print on the scroll check list shall be readable through the lens with the flight check list holder light at full power.

3.9.3 Movement of scroll check list. Means shall be provided to move a scroll check list across the lens in both directions. The scroll check list shall be positioned in the flight check list holder such that it does not contact the light or is in continuous contact with the lens. Means shall be provided to keep the scroll check list taut.

3.9.4 Light. The flight check list holder shall have a light that illuminates the scroll check list from inside the case. The light shall have a spherical candlepower of 0.4. The light shall operate on 28 ± 1 Vdc, or a means of converting 28 Vdc to that compatible with the light shall be provided. The light shall be continuously adjustable from no candlepower (off) to full candlepower. The control for the light shall have the capability to positively switch the light off.

3.9.5 Mounting bracket. The mounting bracket shall permit rotation of the flight check list holder from 0° (the position shown in figure 1) to 90° (ends of the case parallel to the mounting bracket). The mounting bracket shall have a positive means for maintaining the flight check list holder in the 90° position, in the 0° position, and in at least one position intermediate between these two positions. Rotation of the flight check list holder beyond the 90° position is optional. The mounting bracket shall maintain the flight check list holder in each position with 10 lbs of force applied to the upper center of the check list holder (above the lens) or to the center of the back of the holder.

3.9.6 Lens. The lens shall not crack or chip upon impact.

3.9.7 Case. The flight check list holder case shall have the capability to have the mounting bracket installed on either end. The case shall not crack, chip, or deform upon impact.

3.9.8 Scroll text indicator. The flight checklist holder shall have a means to indicate a line of text on the scroll check list.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

3.10 Item identification. The flight check list holder and replaceable parts shall be marked with the following identification:

a. Item name.
b. Manufacturer's identification
c. Manufacturer's CAGE code.
d. Manufacturer's part number (PN).
e. Part identification number (PIN).

3.11 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable.

3.12 Durability. The flight check list holder shall operate properly after 2,000 scrolling cycles. A scrolling cycle is defined as full movement of an eight-foot scroll check list from one end to the other and back.

3.13 Component replacement.

3.13.1 Lens replacement. The lens shall be replaceable within two minutes.

3.13.2 Light replacement. The light bulb shall be replaceable within one minute.

4 VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspections (see 4.3).

4.2 First article inspection. When required (see 3.1), first article shall be performed on three flight checklist holders. First article inspection shall consist of all tests in 4.6 and 4.7.

4.3 Conformance inspection. Conformance inspection shall include the individual tests in 4.6 and sampling tests in 4.7. Sampling shall be in accordance with ANSI/ASQC Z1.4 commencing at the normal inspection level, unless modified in the acquisition documents (see 6.2).

4.4 Test conditions. Unless otherwise specified in the acquisition documents (see 6.2), all inspections shall be performed in accordance with the test conditions specified in the applicable test method documents or applicable paragraphs in this specification.

4.5 Requirements cross-reference matrix. Table I provides a cross-reference matrix of the section 3 requirements tested or verified in the paragraphs below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

TABLE I: Requirements cross-reference matrix

Requirement	Verification	Requirement	Verification
3.3	4.6.1, 476	3.9.3	4.6.2
3.3.1	4.6.1	3.9.4	4.7.5
3.3.2	4.6.1	3.9.5	4.6.5
3.4.1	4.6.4	3.9.6	4.7.1
3.4.2	4.6.1	3.9.7	4.7.2
3.4.3	4.7.7	3.9.8	4.6.1
3.5	4.6.1	3.10	4.6.1
3.6	4.6.1	3.11	4.6.1
3.7	4.6.1	3.12	4.7.8
3.8	4.6.1	3.13.1	4.7.3
3.9.1	4.6.1	3.13.2	4.7.4
3.9.2	4.6.3		

4.6 Individual tests.

4.6.1 Examination. Each flight check list holder shall be examined to determine conformance with materials, weight, dimensions, components, lens color, scroll text indicator, capacity, interchangeability, item identification, and case color.

4.6.2 Movement of the scroll check list. With each flight check list holder fully assembled and a scroll check list mounted in the flight check list holder, the scroll checklist shall be moved one foot in one direction and then one foot in the opposite direction. The scroll check list shall not contact the light source or the lens during movement or when it is stationary. When the scroll check list is stationary, it shall be taut.

4.6.3 Visibility. This test shall be conducted in a dark room with no sources of light. With the flight check list holder fully assembled, a printed scroll check list mounted in the flight check list holder, and the flight checklist holder light at full power, the print on the scroll check list shall be readable through the lens.

4.6.4 Electrical wiring and terminals. The terminals on the flight check list holder shall be connected to a 28 Vdc source using MS25036 terminal lugs. The light shall be adjusted from the off position through full power using the light control. As the light control is moved, the light shall become continuously brighter until the light control reaches the full power position. Deliberate movement of the light control shall be required move the light control from the off position. The voltage across the terminals of the holder shall measure 28 ± 1 Vdc. This test shall be conducted on the terminals on each end of the flight check list holder case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

4.6.5 Mounting bracket. The flight check list holder shall be fully assembled with an eight-foot scroll check list mounted in the flight check list holder. The mounting bracket shall be anchored by the mounting screws to a flat, horizontal surface. The flight check list holder shall be attached to the mounting bracket. With the flight check list holder case in the 90° position (end of the case parallel to the mounting bracket), a 10-lb force shall be applied to the upper center of the face of the flight check list holder case (above the lens). The flight checklist holder shall not move when the force is applied. In the same position, a 10-lb force shall be applied to the center of the back of the case. The flight check list holder shall not move when the force is applied. This test shall be repeated for the 0° position (shown in figure 1), for the intermediate position between 0° and 90° in which the mounting bracket is designed to hold the flight check list holder, and for any other intermediate positions. When these tests are complete, the opposite end of flight check list holder shall be attached to the mounting bracket and these tests shall be repeated.

4.7 Sampling tests. Samples shall be selected from each production lot in accordance with ANSI/ASQC Z1.4 and subjected to the tests below.

4.7.1 Lens. The lens shall be conditioned for four hours at 70 to 85°F. At the end of the four-hour conditioning period, the lens shall be placed in a wood and steel frame in a horizontal plane, as specified in ANSI Z26.1. A 0.5 lb ± 1 ounce (oz) solid, smooth, steel sphere shall be dropped 30 feet ± 2 inches, once, freely, and from rest, striking the lens within one-half inch of its center. The ball shall be allowed to make only one impact with the lens. No cracks or chips in the lens shall be visible after the test.

4.7.2 Case. The flight check list holder case with the lens and light removed shall be placed lens-side down on a level horizontal surface. A 1.0 lb ± 1 oz solid, smooth, steel sphere shall be dropped 30 feet ± 2 inches, once, freely, and from rest, striking the back side of the flight check list holder case within 1 inch of its center. The ball shall be allowed to make only one impact with each case. No cracks, chips, or deformation of the case shall be visible after the test.

4.7.3 Lens replacement. The flight check list holder case shall be opened, the lens shall be removed and reinserted, and the case shall be closed. This test shall take a maximum of two minutes.

4.7.4 Light replacement. The light shall be removed from the flight check list holder and replaced within one minute.

4.7.5 Light. The flight check list holder light shall be connected to a 28 Vdc source. The light shall be energized at rated voltage and remain energized for a burn-in period of four hours. The light output shall be measured. The spherical candlepower of the light shall be 0.4 ± 0.02.

4.7.6 Salt fog. The flight check list holder and all associated components shall be subjected to the salt fog test in ASTM B117 for 50 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

4.7.7 Compatibility with cockpit lighting. Tests to determine the compatibility of the chosen light color with cockpit lighting systems shall be determined by the supplier based on the cockpit lighting systems specified by the procuring activity and these tests shall be identified (see 6.2).

4.7.8 Durability. The flight check list holder shall undergo 2,000 scrolling cycles with a minimum eight-foot scroll check list mounted in the flight check list holder. No parts of the flight check list holder or the scroll checklist shall work loose during the cycle test. After this test, the movement of the scroll check list shall be tested (see 4.6.2)."

5 PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department or Defense Agency automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6 NOTES

6.1 Intended use. The flight check list holder covered by this document is to be used for holding a scroll check list on transport- and helicopter-type aircraft.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of the DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2).

c. If first article test is required (see 3.1).

d. Cockpit lighting system compatibility requirements (see 3.4.3).

e. If the sampling inspection level for conformance testing is to be other than normal (i.e., tightened, or reduced) (see 4.3).

f. If test conditions are to be different than specified (see 4.4).

g. The requirement for the supplier to identify the test(s) to demonstrate lighting compatibility (see 4.7.9).

h. Packaging requirements (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

6.3 Subject term (key word) listing.

Case
Lens
Light
Mounting bracket
Scroll

6.4 Scroll text indicator. A lens with a yellow indicating line, 0.010 to 0.015 inch wide has been used to indicate a line of text on the scroll.

6.5 Movement of scroll checklist. Two rollers with knobs mounted on the outside of the case have been used to move the scroll check list. Each roller should be sized to hold the entire scroll check list as defined by 3.9.1. The rollers should have a mechanical means of attaching the scroll check list such that the scroll check list remains attached during operation. Tapes and tacks are unacceptable means of attaching the scroll check list to the rollers. MS91531-2N2B knobs mounted on the outside of the flight check list holder case have been used to turn the rollers.

6.6 Light. A MS25231-313R red lamp or green phosphoresce lamp as defined by the Improved Lighting System for Army Aircraft has been used to illuminate the scroll check list. A MIL-L-3661/1 LH20 lampholder has been used to mount the lamp. A rheostat with a MS91528-1N2B knob mounted on the outside of the case has been used to dim the light.

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Air Force - 99
Army - GL

Preparing activity:
Air Force - 82

(Project 1680-F661)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-83755B	**2. DOCUMENT DATE (YYMMDD)** **970423**
3. DOCUMENT TITLE Holder, Flight Check List		
4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*		
5. REASON FOR RECOMMENDATION		

6. SUBMITTER		
a. NAME *(Last, First, Middle Initial)*	b. Organization	
c. ADDRESS *(Include zip code)*	**d. TELEPHONE** *(Include Area Code)* (1) Commercial (2) DSN *(if applicable)*	**7. DATE SUBMITTED (YYMMDD)**

8. PREPARING ACTIVITY	
a. NAME SA-ALC/TILDD	**b. TELEPHONE** *(Include Area Code)* (1) Commercial 210-925-6314 (2) DSN 945-6314
c. ADDRESS ***(Include Zip Code)*** 485 Quentin Roosevelt Rd. Kelly AFB, Texas 78241-6425	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** **Defense Quality and Standardization Office** **5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466** **Telephone (703) 756-2340 DSN 289-2340**

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:38Z
Check the source to verify that this is the current version before use.