
MILITARY SPECIFICATION SHEET


SOCKETS, PLUG-IN ELECTRONIC COMPONENTS, (RIGHT ANGLE LEADS, FOR 8 PIN DUAL-IN-LINE PACKAGES)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the sockets described herein shall consist of this specification and the latest issue of MIL-S-83734.

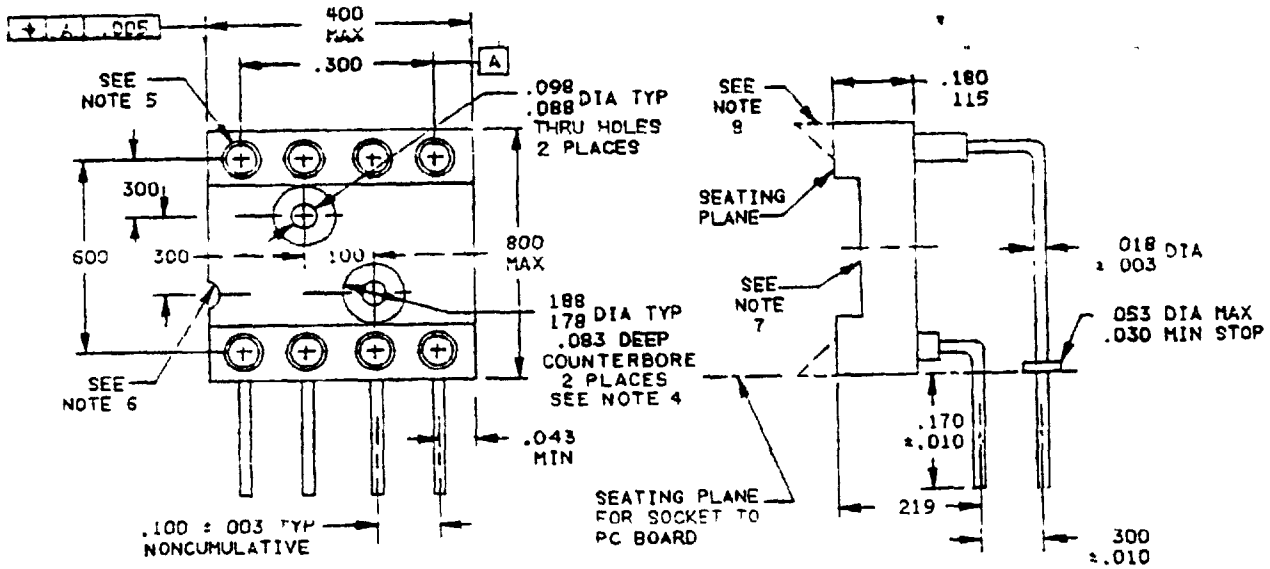

CONFIGURATION 3 (HOLE LOCATION A)

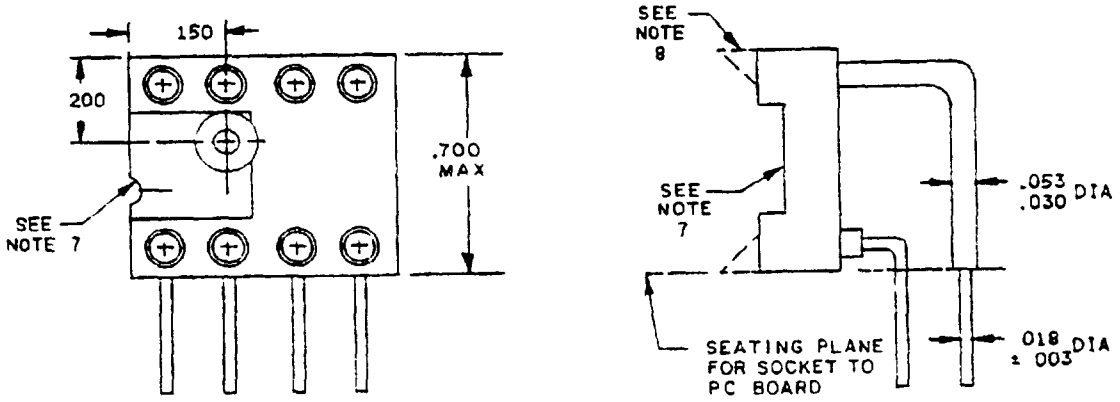

CONFIGURATION 3 (HOLE LOCATION B)

FIGURE 1. Socket, dual-in-line, right angle leads

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	0.08	.150	3.81
.005	0.13	.170	4.32
.010	0.25	.178	4.52
018	0.46	.180	4.57
.030	0.76	.188	4.78
.043	1.09	200	5.08
.053	1.35	.219	5.56
.083	2.11	.300	7.62
.088	2.24	.400	10.16
.098	2.49	.600	15.24
.100	2.54	.700	17.78
.115	2.92	.800	20.32

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Holes to be provided for mounting. A recess to be provided to fully enclose the head or nut of fastener below the surface of the sockets.
5. Devices shall accept flat leads .008 (0.20 mm) to .015 (0.38 mm) thick by .015 (0.38 mm) to .021 (0.53 mm) wide. The values for mating forces are based upon the use of standard leads .011 ±.002 (0.28 ±0.05 mm) thick by .018 ±.002 (0.46 ±0.05 mm) wide. The length of the lead accepted by the device shall be .150 (3.81 mm) long for the low profile sockets. Contact shall be made at or before reaching a depth of .100 (2.54 mm) in the low profile sockets.
6. A visual polarization index shall be provided in the first quadrant. If the visual index overlaps into the fourth quadrant, it shall be adjacent to or clockwise from contact number one.
7. It is desirable that the socket face shall be relieved to facilitate removal of the integrated circuit.
8. Ramped edges optional. Configuration of edges optional.

FIGURE 1. Socket dual-in-line, right angle leads - Continued.

REQUIREMENTS.

Design and construction.

Dimensions and configuration See figure 1 and table I.

Material and contact finish. In accordance with MIL-S-83734.

Terminations: Printed circuit terminal, type II (see table I and MIL-S-83734).

Contact identification See figure 1 and note 6

Part number M83734/11- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

TABLE I Dash numbers and characteristics. 1/

Dash number M83734/11	Contact engagement area finish	Termination finish	Hole location
-001	Gold	Gold	A
-002	Gold	Tin/lead	A
-003	Tin/lead	Tin/lead	A
-004	Gold	Gold	B
-005	Gold	Tin/lead	B
-006	Tin/lead	Tin/lead	B

1/ For replacement purposes, the Government will stock, store, and issue -001 and -004 parts only. (See 6.5 of MIL-S-83734)

NOTE Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities
Navy - AS, OS, SH, TD
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3704-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.