
FED. SUP CLASS
5935

User activities: Army - AR, MI
Navy - YD, AS
Air Force -

Review activities: Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

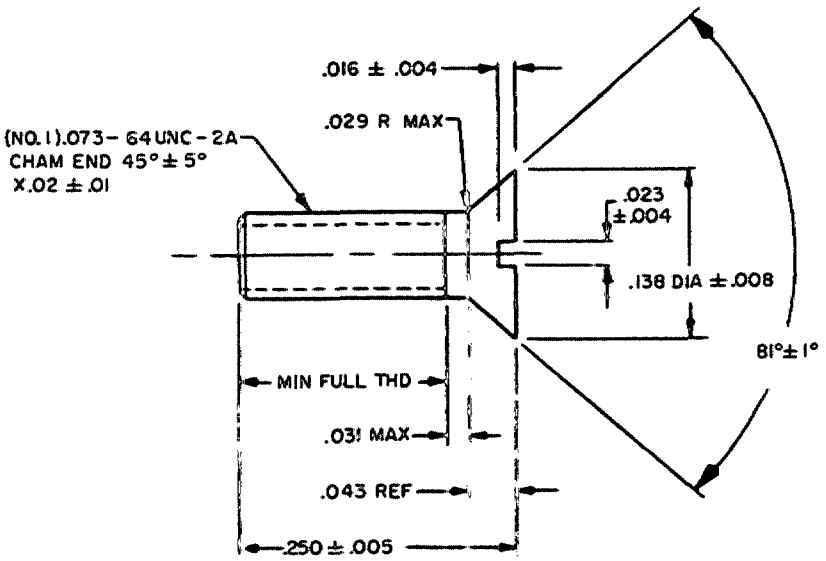

DESIGN STANDARD FOR USE WITH MIL-C-28754/17

INCHES	MM	INCHES	MM
.004	.10	.(29	.74
.005	.13	.(31	.79
.008	.20	.(43	1.09
.01	.3	.073	1.85
.016	.41	.138	3.51
.02	.5	.250	6.35
.023	.58		

NOTES:
1. Dimensions are in inches.
2. Break sharp edges .005 maximum.
3. Material: AISI 303 or 303 SE, ANL and CD or per QQ-S-764, CL303 or 303 SE, condition A.
4. Passivate per QQ-P-35, type IV.
5. Inside corners: .005 R maximum.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.
8. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

(B) denotes changes

APPROVED 4 Sep 75
REVISED (A) 16 Apr 76 (B) 30 April 1979

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - EC Other Cust AF-85 ARMY-CR	International Interest	TITLE SCREW, FLAT HEAD	MILITARY STANDARD MS14065
Procurement Specification NONE		SUPERSEDES: Drawing 2825809 Code Ident 10001	PAGE 1 OF 1

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3036-53

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:34Z
Check the source to verify that this is the current version before use.