INCH-POUND

MS25034K
1 February 2006
SUPERSEDING
MS25034J
20 Decenber1982

DETAIL SPECIFICATION SHEET

GUARD, SWITCH, 3 POSITION

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-DTL-7703.


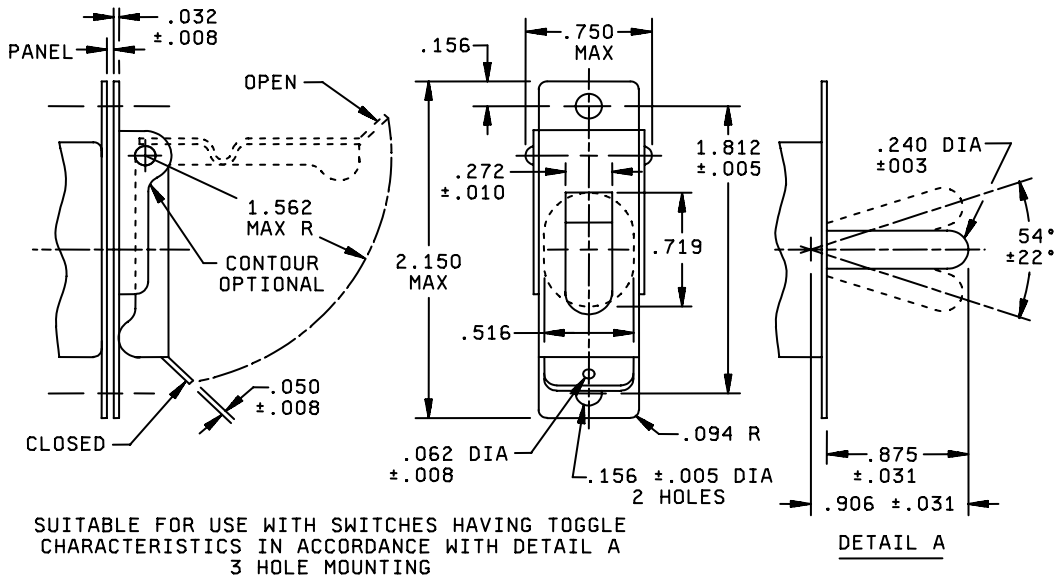


FIGURE1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

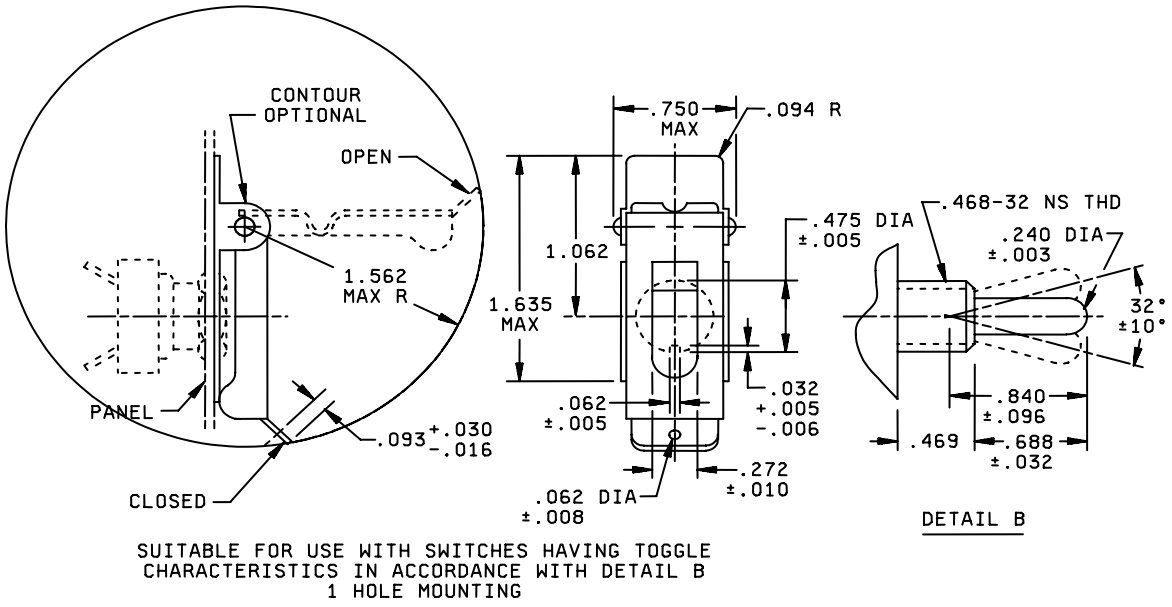

DASH NO.	TYPE	PANEL THICKNESS (REF)	OPERATING FORCE
-1	3- HOLEMOUNTING	.050 TO .081	.2 TO 1.5 LB
-2	1-HOLE MOUNTING	.050 TO .248	

FIGURE.1: Dimensions and configuration Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	.08	.093	2.36	.688	17.47
.005	.13	.094	2.39	.719	18.26
.006	.15	.096	2.44	.750	19.05
.008	.20	.156	3.96	.840	21.34
.010	.25	.240	6.10	.875	22.22
.016	.41	.248	6.30	.906	23.01
.030	.76	.272	6.91	1.062	26.97
.031	.79	.469	11.91	1.562	39.67
.032	.81	.475	12.06	1.635	41.53
.050	1.27	.516	13.11	1.812	46.02
.062	1.57	.625	15.88	2.150	54.61
.081	2.06				

NOTES:

1. Dimensions are inches.
2. Unless otherwise specifies, Tolerances are ± .016 on decimals.
3. Material: Steel, commercial, shall be smooth and free from burrs.
4. Finish: Zinc plate, ASTM B 633, type III, or cadmium plate, SAE-AMS-QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or DOD-P-15328, black enamel, lusterless, color number 37038 or semigloss, color number 27038, FED-STD- 595 or equivalent.
5. This standard takes precedence over documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.

REQUIREMENT

Guard shall remain in either the open or closed position.

Opening the guard shall not change position of the switch contacts.

When lever is in upward position, closing guard shall throw lever to the center position.

Normal operation of the toggle between the center and down positions shall be possible without having to lift the guard

Referenced documents

MIL-DTL-7703
MIL-C-8514
ASTM-B633
SAE-AMS-QQ-P-416
DOD-P-15328
FED-STD- 595

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR
Air Force – 11
Navy – AS
DLA – CC

Review activities:
Air Force – 99

Preparing activity
DLA – CC
(Project 5930-2005-011)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.