FED. SUP CLASS
6620

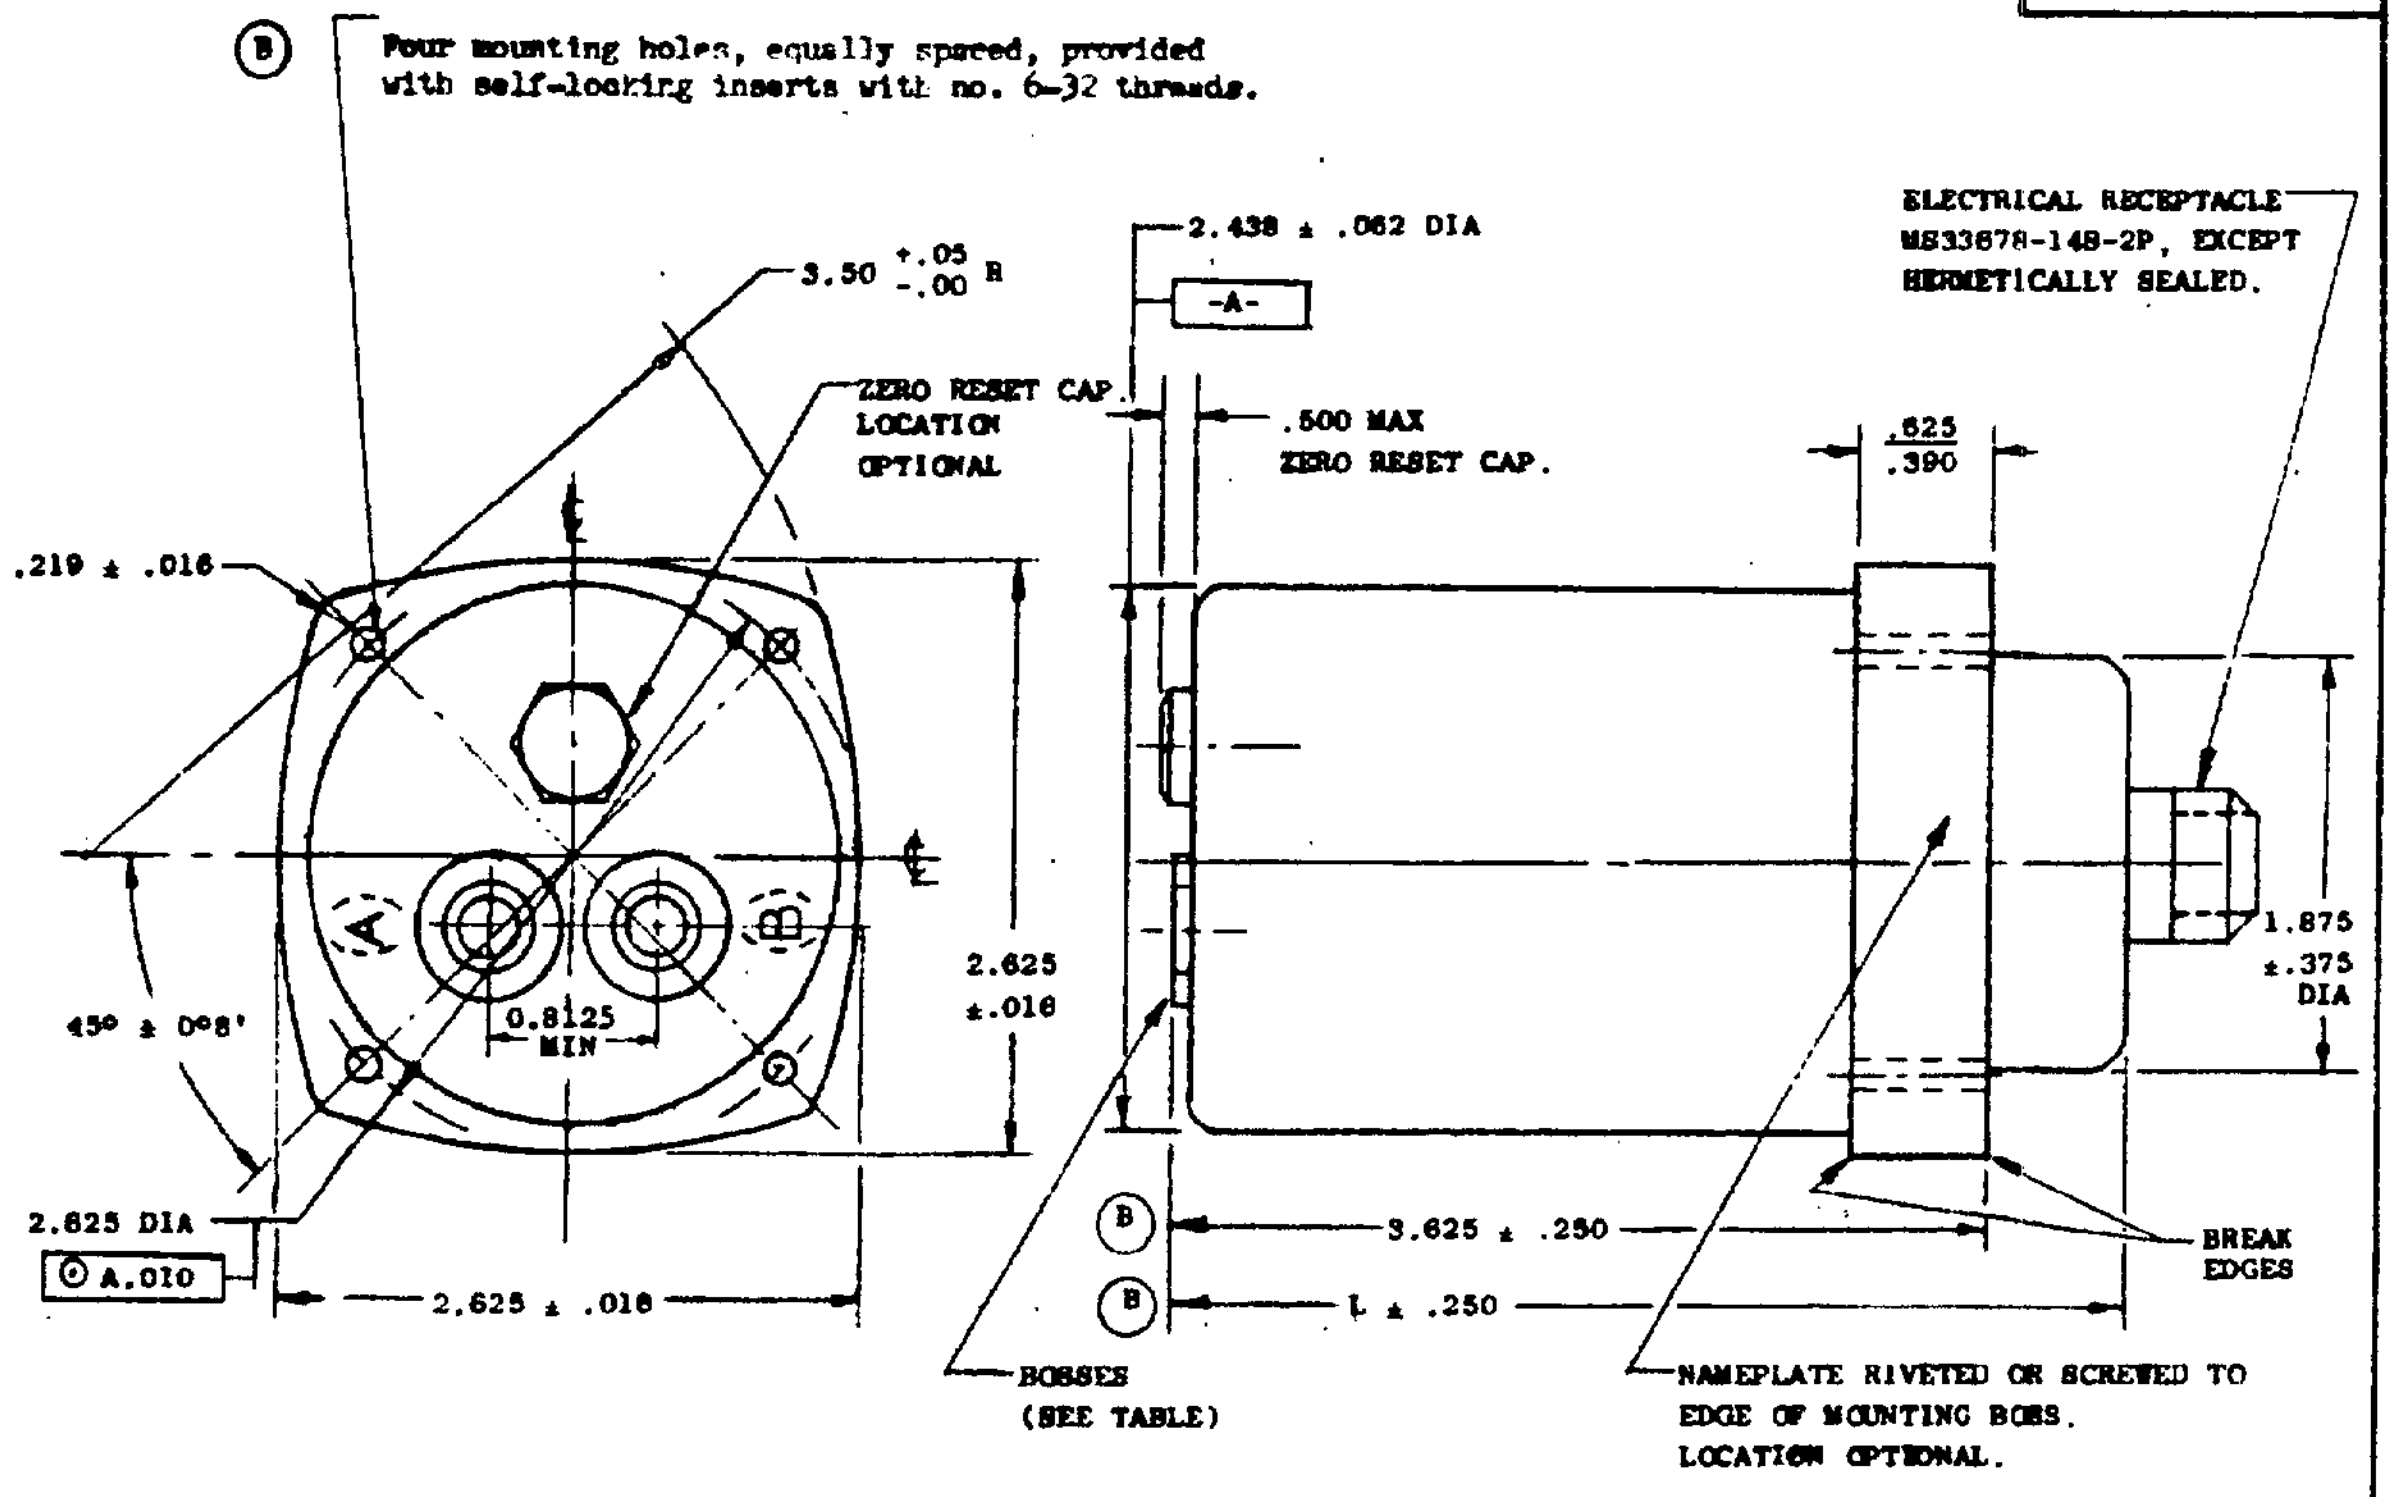

Ⓑ Four mounting holes, equally spaced, provided with self-locking inserts with no. 6-32 threads.

ELECTRICAL RECEPTACLE MS33678-14B-2P, EXCEPT HERMETICALLY SEALED.

BOSSES (SEE TABLE)

NAMEPLATE RIVETED OR SCREWED TO EDGE OF MOUNTING BOSS. LOCATION OPTIONAL.

DASH NO.	RANGE	L	MARKING IDENTIFICATION (NOTE 1) FOR AREAS:			BOSSES OR FITTING ENDS REQUIRED FOR AREAS:			REPLACES TYPE NUMBER
			A	B	C* (NOT SHOWN)	A	B	C*	
-1	0-20 PSI DIFFERENTIAL PRESSURE	5	P_1	P_2	—	AND10050-4**	AND10050-4**	—	—
-2	0-20 PSI GAGE PRESSURE	5	P	V	—	↑	↑	—	—
-3	0-50 PSI DIFFERENTIAL PRESSURE	5	P_1	P_2	—			—	50D
-4	0-50 PSI GAGE PRESSURE	5	P	V	—			—	—
-5	0-100 PSI DIFFERENTIAL PRESSURE	4.250	P_1	P_2	—			—	100D
-6	0-100 PSI GAGE PRESSURE	4.250	P	V	—			—	—
-7	0-200 PSI DIFFERENTIAL PRESSURE	4.250	P_1	P_2	—			—	200D
-8	0-200 PSI GAGE PRESSURE	4.250	P	V	—			—	—
-9	0-300 PSI DIFFERENTIAL PRESSURE	4.250	P_1	P_2	—			—	—
-10	0-300 PSI GAGE PRESSURE	4.250	P	V	—			—	—
-11	0-500 PSI DIFFERENTIAL PRESSURE	4.250	P_1	P_2	CPR			MS33656-2	500D
-12	0-500 PSI GAGE PRESSURE	4.250	P	V & CPR	—		↓	—	500G
-13	0-1000 PSI GAGE PRESSURE	4.250	P	V & CPR	—		AND10050-4**	—	1000G
-14	0-1000 APPROXIMATE GAGE PRESSURE	4.250	P	———	CPR		———	MS33656-2	1000AG
-15	0-2000 APPROXIMATE GAGE PRESSURE	4.250	P	———	CPR	↓	———	MS33656-2	2000AG
-16	0-5000 APPROXIMATE GAGE PRESSURE	4.250	P	———	CPR	AND10050-4**	———	MS33656-2	5000AG

*LOCATION OPTIONAL ON BACKPLATE.
**"C" DIMENSION OF AND10050 NEED NOT BE CONFORMED TO.

NOTES:

1. MARKING SHALL BE RAISED AT LEAST .030 AND CONSPICUOUSLY PAINTED.
2. DIMENSIONS IN INCHES.
3. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON INVITATIONS FOR BID.

REVISED Ⓐ 1 NOV. 1964 Ⓑ 15 April 1965

APPROVED 7/1/60

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - WP Other Cust	TITLE TRANSMITTERS, PRESSURE, SYNCHRO, AIRCRAFT, 165 DEGREE MOVEMENT	MILITARY STANDARD MS28130 (WP)
PROCUREMENT SPECIFICATION MIL-T-5483	SUPERSEDES:	SHEET 1 OF 1

W-54

DD FORM 672-1 SEP 57 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.