
FED. SUP CLASS
2330

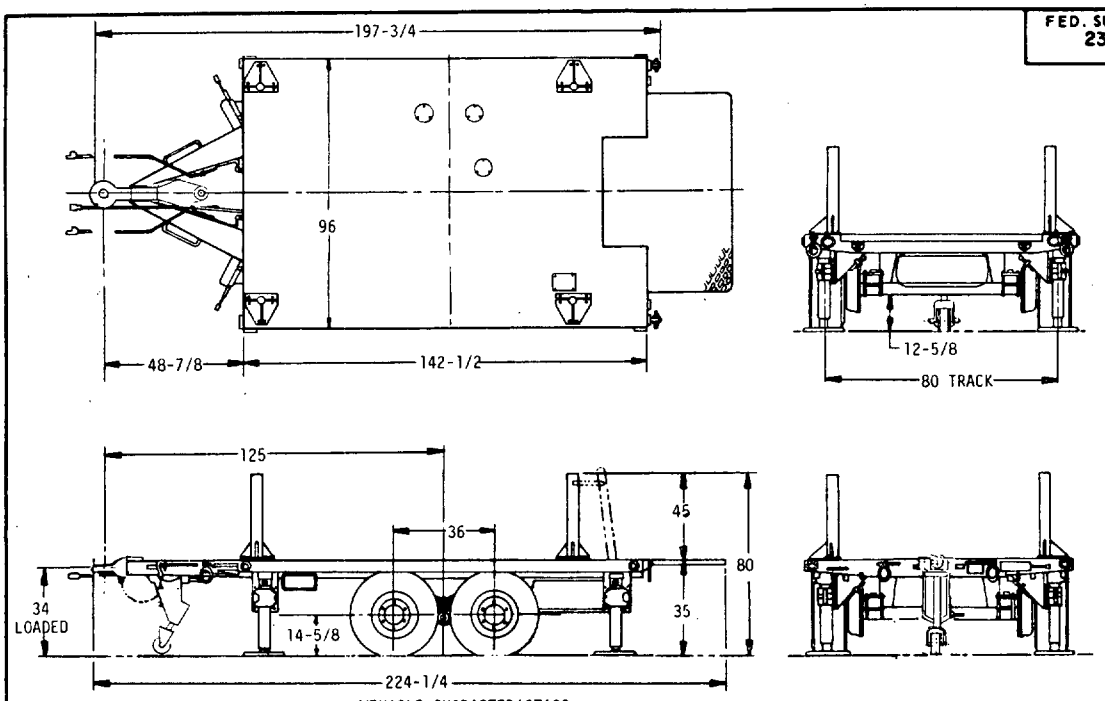

VEHICLE CHARACTERISTICS

WEIGHT:	EMPTY	LOADED
PAYLOAD: INC. BODY,		8000
ON WHEELS:	4904	12658
" LUNETTE:	216	462
TOTAL LBS	5120	13120

MAXIMUM TOWING SPEED:
LOADED 10 MPH
HIGHWAY 50 MPH

*FORDING DEPTH: 36 IN

GENERAL:
TO PROVIDE A TRAILER-MOUNTED, DOUGH-MIXING OUTFIT FOR MAKING BREAD IN THE FIELD. THIS UNIT SUPPLIES THE DOUGH IN TWO LB. LOAFS FOR THREE TRAILER-MOUNTED FIELD BAKERY OVENS.

LUNETTE:		11682150
SAFETY CHAIN, TWO		7411027
LANDING GEAR SUPPORT ASSY		11682170
STANCHIONS, FOUR		11636493

FRAME: ASSY		11636426
DECK PLATE	INST'N	11636425
LEVELING JACK	INST'N	11636436
PLATE, PLATFORM RETAINER, TWO		11636484
PLATFORM ASSY		11636450

SUSPENSION: TANDEM	INST'N	11592608
LOAD-BEARING CAPACITY		10000 LBS
AXLES, HUB AND DRUM ASSY, TWO		11592609
SPRINGS, 3-1/2 X 40-1/4 SIX LEAVES		11592616
SPACER ASSY, SPRING		11592638-2639-2640
AXLE TUBE ASSYS, FRONT AND REAR		11592610
BRACKET ASSY, TRUNION, TWO		11592672
SEAL ASSY, AXLE		7521649

WHEELS: DISC AND RIM ASSY		11592642
SIZE,		16-1/2 x 9-3/4
VALVE		MS51368-2
WHEEL BEARINGS	OUTER	10948079
WHEEL BEARINGS	INNER	10945151
(AFBMA) BEARINGS	OUTER	392-3920E
(AFBMA) BEARINGS	INNER	3994-3920E

TIRES: 12 X 16-1/2 TEN PLY	11636428
TREAD,	SUPERSINGLE

BRAKES: AIR/HYDRAULIC	INST'N	11592673
BRAKE ASSY; R H AND L H		11592609
EMERGENCY RELAY VALVE		MS53004-1
AIR RESERVOIR		11636427
HUB		8357986
DRUM, 15 X 3		7521662
ADAPTER		7521663

HAND BRAKE:	INST'N	11636445
HAND BRAKE ASSY		11636502

ELECTRICAL SYSTEM:	INST'N	11592674
POTENTIAL		24 VOLTS
COMPOSITE TAILLIGHT, STOP, TURN AND MARKER		11614157
REFLECTOR, RED, FOUR		MS35387-1
REFLECTOR, AMBER, FOUR		MS35387-2

GENERAL:		
STOP, BUMPER ASSY, FOUR		10914500
SHACKLE, LIFTING AND TIE DOWN, FOUR		11592598
CONTAINER ASSY, MANUAL		10950595
CARRIER ASSY, SPARE TIRE	INST'N	11592671

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.
#4. SUBJECT OF NATO STANAG 2805-A(EDITION 3). DO NOT REVISE OR CHANGE.

(B) ENTIRE STANDARD REVISED

APPROVED 1 OCT 1969 REVISED (B) 20 MAY 85

MS PART NO.	ENGINEERING DWG NO.
MS 52110 -1	8736832

P.A. ARMY-AT
Other Cust

TITLE
TRAILER, FLATBED: 4 TON, 4 WHEEL, MILITARY DESIGN, M795

MILITARY STANDARD
MS52110(AT)

PROCUREMENT SPECIFICATION
MIL-T-62073

SUPERSEDES:

SHEET | OF |

DD FORM SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.