

USER ACTIVITIES:
REVIEWER ACTIVITIES
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.


FED. SUP CLASS
2330

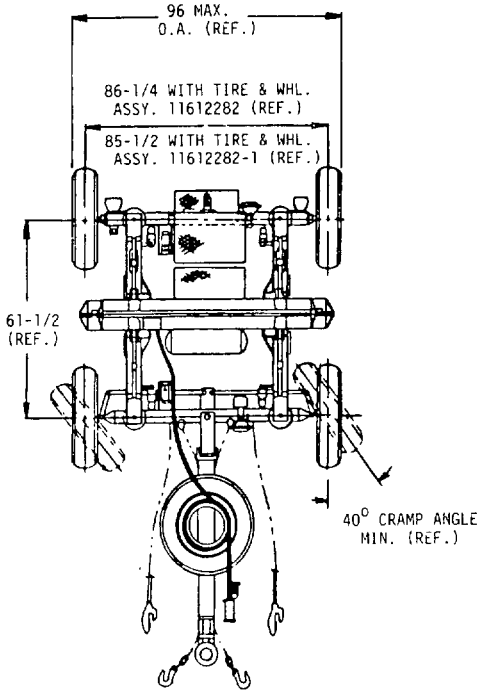

PLAN VIEW

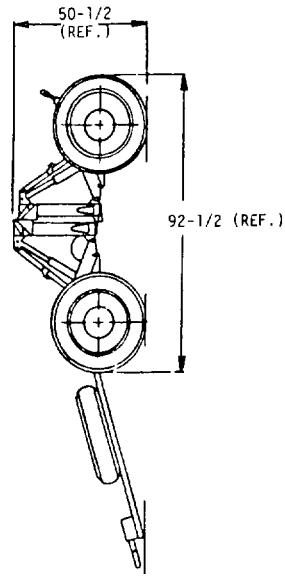

SIDE VIEW

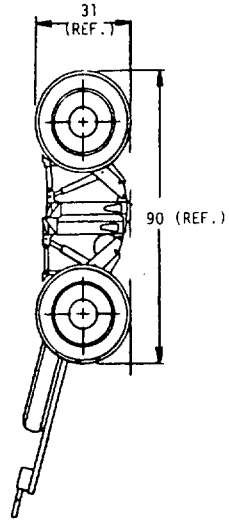

SIDE VIEW (LOWERED)

VEHICLE CHARACTERISTICS

PRIME MOVER: 5 TON TRUCKS

DOLLY TRAILER: FRONT M721
REAR M722

CURBWEIGHT: 1770 LBS.

WEIGHT DISTRIBUTION: FRONT AXLE 3910 LBS.
REAR AXLE 3860 LBS.

GROSS WEIGHT: (DOLLY SET WITH PAYLOAD)
LOADED 7770 LBS.

BODY DATA: (* TOWING BAR RAISED)

OVERALL LENGTH	148 IN.
REDUCIBLE TO*	92 IN.
OVERALL WIDTH	96 IN.
OVERALL HEIGHT*	78 IN.
REDUCIBLE TO	31 IN.

MINIMUM GROUND CLEARANCE 14 IN.
DEPARTURE ANGLE 90 DEGREES

FORDING DEPTH: UP TO SUBMERGED TIRES
31 IN.

ELECTRICAL SYSTEM: 24 OR 12 V DC
COMPOSITE LIGHTS 11614157
REFLECTORS-FRONT MS35387-2
REAR MS35387-1

SPRINGS: AIR, P/N 11602365
9.8 INCH DIA (INFLATED) MAX.
(ALLOW .25 ALL AROUND)
HEIGHT (DESIGN) 4.5 IN.
RATE

BRAKE SERVICE: DRUM SIZE 11 x 2 IN.
AIR/HYDRAULIC ACTUATION
EMERGENCY RELAY VALVE MS53004-1
AIR RESERVOIR 10947428
SAE 110, 125 PSI
APPROX. CAPACITY 1080 CU. IN.

PARKING BRAKE: MECHANICALLY ACTUATED
HAND BRAKE
DRUM SIZE 11 x 2 IN.
MOUNTED INTEGRALLY WITH REAR DOLLY
SERVICE BRAKE
EFFECTIVE FOR 30 PERCENT SLOPE

MAXIMUM TOWING SPEED:

CROSS COUNTRY	15 MPH
HIGHWAY	50 MPH

WHEEL: SINGLE, DISC TYPE
(FOR 16 X 4.50- "OE" RIM) 7387807
RIM 16 X 4.50- "OE" MILITARY TYPE 7387806

LUNETTE: RESILIENT (SPRING LOADED)
11612317

AXLES: SINGLE AXLES, TUBULAR, SQUARE
FRONT AXLE ASSEMBLY 11612273
REAR AXLE ASSEMBLY 11612274

SHOCK ABSORBERS: HYDRAULIC 11602475

SHELTER LOWERING AND LIFTING MECHANISM:
HYDRAULIC

TIRES: 7.00 X 16, 8-PLY
MILITARY NON-DIRECTIONAL CROSS-COUNTRY
RECOMMENDED PRESSURE WITH MAX LOAD:
HIGHWAY SERVICE 60 PSI
OFF ROAD SERVICE & AIR

(A) ENTIRE STANDARD REVISED

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DWG NO
MS52147-1	8736772

APPROVED 19 FEB 81 REVISED (A) 22 FEB 85

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE DOLLY SET, LIFT, TRANSPORTABLE SHELTER: 3 TON, M720
PROCUREMENT SPECIFICATION MIL-D-62027	SUPERSEDES:	

MILITARY STANDARD
MS52147(AT)
SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.