INCH-POUND


MS9313B
16 February 2010
SUPERSEDING
MS9313A (ASG)
12 August 1964

DETAIL SPECIFICATION SHEET

CAP, TUBE - SAE-AMS5646

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

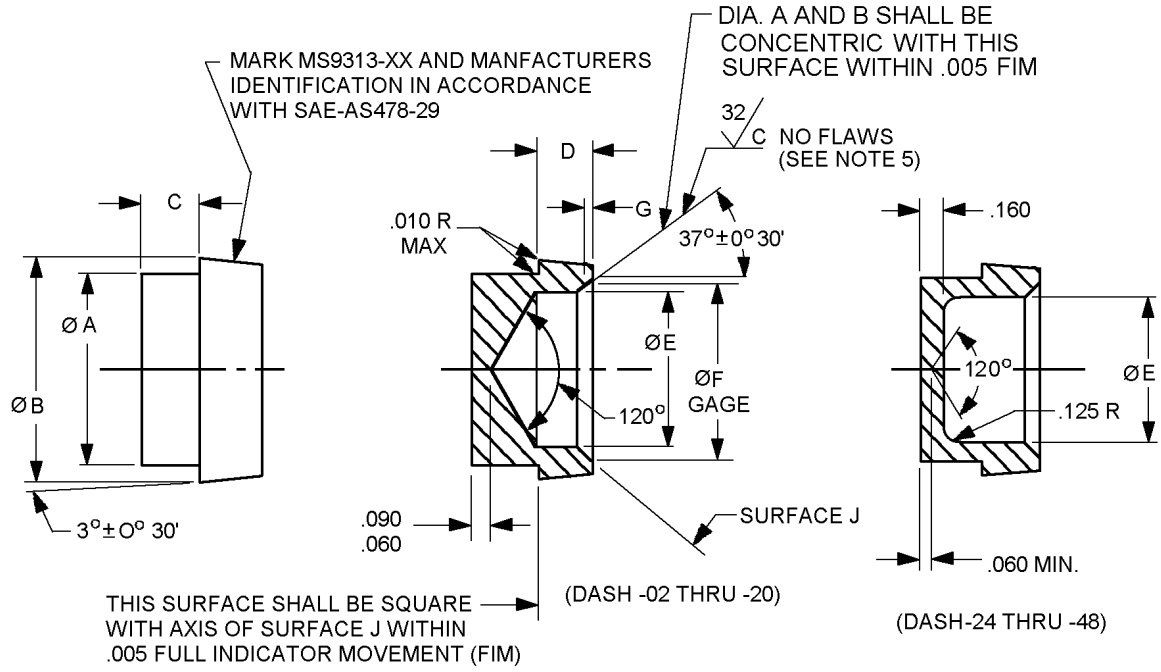

Inches	mm
.005	0.13
.010	0.25
.060	1.52
.090	2.29
.125	3.18
.160	4.06

FIGURE 1. Cap, tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

Dash number	Tube OD inches (mm)	A Diameter inches (mm) +.000 -.005 (0.13)	B Diameter inches (mm) +.000 -.003 (0.08)	C inches (mm)	D inches (mm)
-02	.125 (3.18)	.172 (4.37)	.267 (6.78)	.230 (5.84)	.235 (5.97)
-03	.188 (4.78)	.234 (5.94)	.329 (8.36)	.230 (5.84)	.235 (5.97)
-04	.250 (6.35)	.297 (7.54)	.383 (9.73)	.230 (5.84)	.235 (5.97)
-05	.313 (7.95)	.366 (9.30)	.445 (11.30)	.230 (5.84)	.235 (5.97)
-06	.375 (9.53)	.432 (10.97)	.502 (12.75)	.230 (5.84)	.228 (5.79)
-07	.438 (11.13)	.494 (12.55)	.564 (14.33)	.230 (5.84)	.255 (6.48)
-08	.500 (12.70)	.562 (14.27)	.682 (17.32)	.230 (5.84)	.285 (7.24)
-09	.562 (14.27)	.626 (15.90)	.743 (18.87)	.230 (5.84)	.295 (7.49)
-10	.625 (15.88)	.690 (17.53)	.797 (20.24)	.230 (5.84)	.302 (7.67)
-11	.688 (17.48)	.762 (19.35)	.908 (23.06)	.230 (5.84)	.305 (7.75)
-12	.750 (19.05)	.826 (20.98)	.972 (24.69)	.230 (5.84)	.306 (7.77)
-14	.875 (22.23)	.953 (24.21)	1.097 (27.86)	.230 (5.84)	.325 (8.26)
-16	1.000 (25.40)	1.081 (27.46)	1.222 (31.04)	.230 (5.84)	.342 (8.69)
-18	1.125 (28.58)	1.209 (30.71)	1.409 (35.79)	.260 (6.60)	.370 (9.40)
-20	1.250 (31.75)	1.339 (34.01)	1.534 (38.96)	.300 (7.62)	.397 (10.08)
-24	1.500 (38.10)	1.609 (40.87)	1.784 (45.31)	.300 (7.62)	.405 (10.29)
-28	1.750 (44.45)	1.882 (47.80)	2.159 (54.84)	.400 (10.16)	.405 (10.29)
-32	2.000 (50.80)	2.159 (54.84)	2.409 (61.19)	.400 (10.16)	.405 (10.29)
-40	2.500 (63.50)	2.659 (67.54)	2.911 (73.94)	.400 (10.16)	.405 (10.29)
-48	3.000 (76.20)	3.172 (80.57)	3.411 (86.64)	.400 (10.16)	.405 (10.29)

FIGURE 1. Cap, tube - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

Dash number	E Diameter inches (mm)	F Diameter inches (mm)	G inches (mm)	Approximate weight lb/100 (kg/100)
-02	.090 (2.29)	.124 (3.15)	.041 (1.04)	.37 (0.17)
-03	.150 (3.81)	.185 (4.70)	.040 (1.02)	.63 (0.29)
-04	.200 (5.08)	.242 (6.15)	.036 (.91)	1.00 (0.45)
-05	.260 (6.60)	.302 (7.67)	.035 (.89)	1.44 (0.65)
-06	.320 (8.13)	.358 (9.09)	.031 (.79)	1.67 (0.76)
-07	.385 (9.78)	.430 (10.92)	.036 (.91)	2.18 (0.99)
-08	.438 (11.13)	.504 (12.80)	.044 (1.12)	3.27 (1.48)
-09	.500 (12.70)	.555 (14.10)	.036 (.91)	3.82 (1.73)
-10	.562 (14.27)	.621 (15.77)	.039 (.99)	4.36 (1.98)
-11	.625 (15.88)	.698 (17.73)	.048 (1.22)	5.67 (2.57)
-12	.686 (17.42)	.769 (19.53)	.054 (1.37)	6.39 (2.90)
-14	.812 (20.62)	.894 (22.71)	.054 (1.37)	8.09 (3.67)
-16	.938 (23.83)	1.021 (25.93)	.055 (1.40)	9.92 (4.50)
-18	1.062 (26.97)	1.174 (29.82)	.074 (1.88)	13.91 (6.31)
-20	1.188 (30.18)	1.299 (32.99)	.074 (1.88)	17.00 (7.71)
-24	1.438 (36.53)	1.532 (38.91)	.062 (1.57)	23.61 (10.71)
-28	1.688 (42.88)	1.839 (46.71)	.100 (2.54)	34.90 (15.83)
-32	1.938 (49.23)	2.099 (53.31)	.107 (2.72)	42.65 (19.35)
-40	2.438 (61.93)	2.594 (65.89)	.117 (2.97)	57.75 (26.19)
-48	2.938 (74.63)	3.099 (78.71)	.107 (2.72)	75.45 (34.22)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Caps shall be free of all burrs and slivers.
4. Unless otherwise specified tolerance is ±.010 inch (0.25 mm) angular dimensions ±5°.
5. This surface shall be free of nicks, chatter marks, or low spots. Unbroken line of contact to show all around at other than extremities of this surface when rotated in content with 74° 0'± 0° 1' included angle gage lightly coated by rubbing with carbon paper.
6. For design features purposes, this standard takes precedence over documents referenced herein.

FIGURE 1. Cap, tube - Continued.

REQUIREMENTS:


Dimensions and configurations: See figure 1.

Material: Steel, corrosion and heat-resistant in accordance with SAE-AMS5646.

Parts shall be fluorescent penetrate inspected in accordance with ASTM E1417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN):

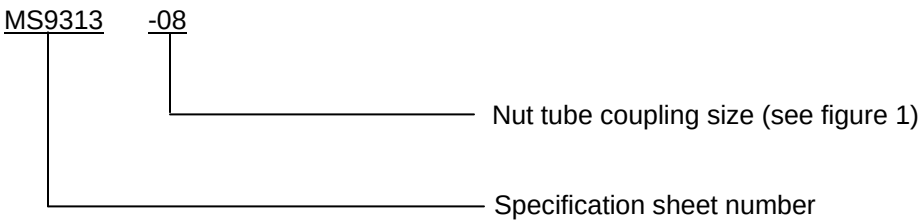

PIN Example:

MS9313-08 identifies a cap, tube .500 inch (12.70 mm) tube, CRES.

Do not use unassigned PIN's.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. This document references the following:

ASTM E1417
SAE-AMS5646

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2009-085)

Review activity:
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.