
MS9353 (ASG)

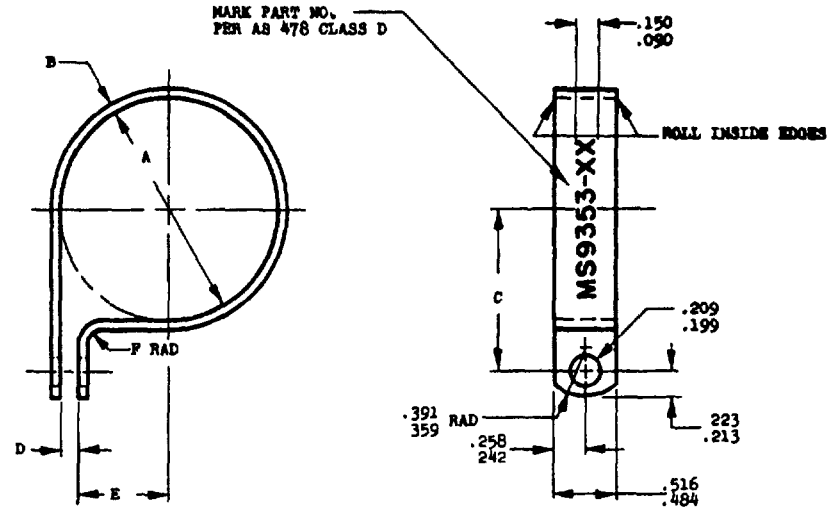

PART NO.		NOM TUBE OD	A DIA BASIC	B ± 005	C Ⓐ ±.010	D	E REF	F RAD ±.016	APPROX WEIGHT LB/HA
MS9353-01		.125	125	031	.360	.062- 078	.000	062	.002
MS9353-02		.188	.188	031	423	062-.078	031	062	002
MS9353-03		250	.250	.031	.457	062- 078	062	.062	.003
MS9353-04		.312	312	031	498	.062- 078	094	.062	.003
MS9353-05		375	.375	.031	.529	.062-.078	.125	062	003
MS9353-06		438	438	.031	.560	.062-.078	.156	.062	.004
MS9353-07		500	500	.031	592	062-.078	188	062	.004
MS9353-08		.562	.562	.031	.623	062-.078	219	062	.004
MS9353-09		625	.625	031	.654	.062- 078	.250	062	.005
MS9353-10		688	688	.051	752	.062-.078	.281	.109	.008
MS9353-11		.750	750	051	.783	062- 078	312	.109	.009
MS9353-12		812	812	051	.814	062- 078	.344	.109	011
MS9353-13		.875	875	.051	845	.062- 078	.375	.109	.011
MS9353-14		938	.938	.051	.877	.062-.078	406	.109	.011
MS9353-15		1.000	1.000	051	908	.062-.078	438	.109	011
MS9353-16		1.062	1.062	.051	939	062-.078	469	109	.012
MS9353-17		1.125	1.125	.051	970	062-.078	500	.109	.012
MS9353-18		1.188	1.188	051	1.002	062- 078	531	.109	013
MS9353-19		1.250	1 250	.064	1 062	094- 110	531	125	.017
MS9353-20		1 312	1 312	.064	1 093	094-.110	562	.125	.018
MS9353-21		1.375	1.375	064	1.125	094- 110	594	125	.018
MS9353-22		1 438	1.438	.064	1.156	094- 110	625	.125	.019
MS9353-23		1.500	1.500	.064	1 188	.094- 110	656	.125	.019
MS9353-24		1.562	1.562	.064	1.219	094- 110	.688	.125	.020
MS9353-25		1 625	1 625	064	1 250	.094- 110	.719	125	.021
MS9353-26		1.688	1 688	.064	1.281	094-.125	750	.125	.021
MS9353-27		1.750	1 750	.064	1 312	094-.125	.781	.125	.022
MS9353-28		1.812	1 812	064	1 344	.094- 125	.812	.125	.023
MS9353-29		1 875	1.875	064	1 375	.094- 125	844	.125	.023
MS9353-30		1.938	1.938	.064	1 406	.094- 125	875	.125	.024
MS9353-31		2.000	2 000	.064	1.438	.094- 125	.906	.125	.024

MATERIAL: ALUMINUM AMS 4041
REMOVE BURRS AND SHARP EDGES
DIMENSIONS IN INCHES
CLAMP SHALL BE FORMED AS SHOWN. DIMENSION "D" SHALL FALL WITHIN THE SPECIFIED LIMITS WHEN CLAMP IS ASSEMBLED ON A BAR THE DIAMETER OF WHICH IS EQUAL TO THE NOMINAL TUBE OD WITHIN ±.001.
HOLES SHALL BE IN ALIGNMENT WITHIN .010 AND CLAMP SHALL BE FLAT WITHIN .010 THRU CLAMP WIDTH WHEN ASSEMBLED ON TEST BAR. IN THE FREE POSITION CLAMP MAY SPRING OPEN PROVIDED THE ABOVE CONDITIONS ARE MET.
DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS. Ⓐ
THIS MILITARY STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION. Ⓐ

APPROVED 11 Aug 61 REVISED Ⓐ 3 Mar 69

P.A. USAF - 82
Other Cust
Navy - AS

MILITARY STANDARD

CLAMP, LOOP-ALUMINUM, .204 HOLE

MS9353 (ASG)

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 1 OF 1

5340 - F005

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ its standard where suitable.

Review activities:
ESAF - 11, 85

☆U S GOVERNMENT PRINTING OFFICE: 1981 — 703-023/7768

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.