
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

# MS9389 (ASG)

FED. SUP CLASS 5315

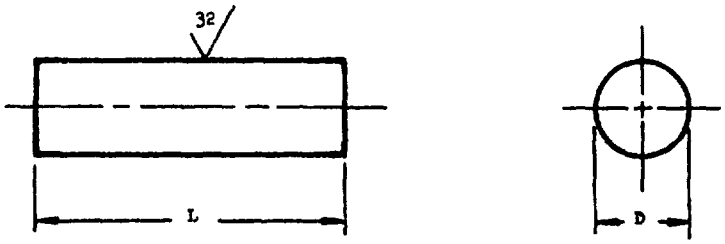


| L ± .010 | DIAMETER "D" AND PART NUMBERS | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | .0625 ± .0005 | | .0938 ± .0005 | | .1250 ± .0005 | | .1875 ± .0005 | |
| | PART NUMBER | APPROX WEIGHT LB/100 | PART NUMBER | APPROX WEIGHT LB/100 | PART NUMBER | APPROX WEIGHT LB/100 | PART NUMBER | APPROX WEIGHT LB/100 |
| .125 | MS9389-01 | .011 | | | | | | |
| .188 | MS9389-02 | .016 | MS9389-27 | .037 | | | | |
| .250 | MS9389-03 | .022 | MS9389-28 | .049 | MS9389-53 | .088 | | |
| .312 | MS9389-04 | .027 | MS9389-29 | .061 | MS9389-54 | .110 | | |
| .375 | MS9389-05 | .032 | MS9389-30 | .073 | MS9389-55 | .132 | MS9389-80 | .295 |
| .438 | MS9389-06 | .038 | MS9389-31 | .085 | MS9389-56 | .154 | MS9389-81 | .344 |
| .500 | MS9389-07 | .043 | MS9389-32 | .097 | MS9389-57 | .175 | MS9389-82 | .393 |
| .562 | MS9389-08 | .049 | MS9389-33 | .109 | MS9389-58 | .197 | MS9389-83 | .441 |
| .625 | MS9389-09 | .054 | MS9389-34 | .121 | MS9389-59 | .219 | MS9389-84 | .491 |
| .688 | MS9389-10 | .059 | MS9389-35 | .134 | MS9389-60 | .241 | MS9389-85 | .540 |
| .750 | MS9389-11 | .065 | MS9389-36 | .146 | MS9389-61 | .263 | MS9389-86 | .589 |
| .812 | MS9389-12 | .070 | MS9389-37 | .158 | MS9389-62 | .285 | MS9389-87 | .638 |
| .875 | MS9389-13 | .076 | MS9389-38 | .170 | MS9389-63 | .307 | MS9389-88 | .687 |
| .938 | MS9389-14 | .081 | MS9389-39 | .182 | MS9389-64 | .329 | MS9389-89 | .737 |
| 1.000 | MS9389-15 | .086 | MS9389-40 | .194 | MS9389-65 | .351 | MS9389-90 | .785 |
| 1.062 | MS9389-16 | .092 | MS9389-41 | .206 | MS9389-66 | .373 | MS9389-91 | .834 |
| 1.125 | MS9389-17 | .097 | MS9389-42 | .219 | MS9389-67 | .395 | MS9389-92 | .884 |
| 1.188 | MS9389-18 | .103 | MS9389-43 | .231 | MS9389-68 | .417 | MS9389-93 | .933 |
| 1.250 | MS9389-19 | .108 | MS9389-44 | .243 | MS9389-69 | .439 | MS9389-94 | .982 |
| 1.312 | MS9389-20 | .113 | MS9389-45 | .255 | MS9389-70 | .460 | MS9389-95 | 1.031 |
| 1.375 | MS9389-21 | .119 | MS9389-46 | .267 | MS9389-71 | .483 | MS9389-96 | 1.080 |
| 1.438 | MS9389-22 | .124 | MS9389-47 | .279 | MS9389-72 | .505 | MS9389-97 | 1.130 |
| 1.500 | MS9389-23 | .130 | MS9389-48 | .291 | MS9389-73 | .526 | MS9389-98 | 1.178 |

1. PINS TO BE STRAIGHT WITHIN .001 FOR LENGTHS .125 TO 1.000 AND .002 FOR LENGTHS 1.062 TO 1.500.
2. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735.
3. IDENTIFICATION. AS 478-37. MANUFACTURER'S IDENTIFICATION REQUIRED.
4. SURFACE ROUGHNESS: AS 291.
5. BREAK SHARP EDGES .003-.015
6. DIMENSIONS IN INCHES.
7. DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 1 AUG 61 REVISED

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

| | | |
|---|---|---|
| P.A. USAF - AFSC<br>Other Cust<br>Navy - Nep | TITLE<br>PIN, STRAIGHT, HEADLESS - AMS 5735, LOOK | MILITARY STANDARD<br>MS9389 (ASG) |
| PROCUREMENT SPECIFICATION:<br>None | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 NOV 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.