
MS9397 (ASG)

FED SUP CLASS
5306

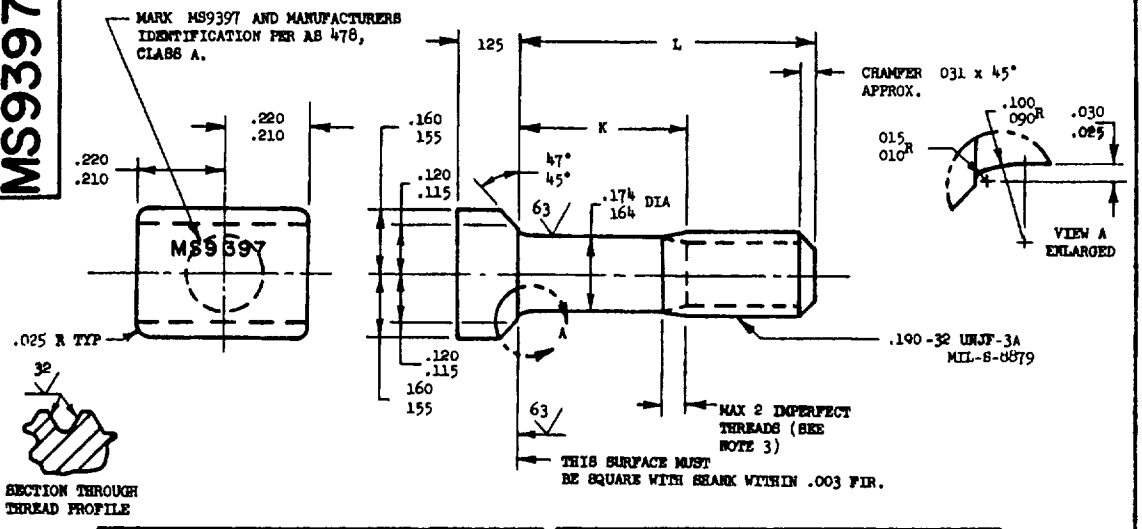

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9397-04	.375	.114- .134	62
MS9397-05	.438	.114- .134	66
MS9397-06	.500	.114- .134	70
MS9397-07	.562	.114- .134	74
MS9397-08	.625	.114- .134	.78
MS9397-09	.688	.114- .134	.82
MS9397-10	.750	.114- .134	86
MS9397-11	.812	.122- .182	.90
MS9397-12	.875	.185- .245	94
MS9397-13	.938	.248- .308	98
MS9397-14	1.000	.310- .370	1 03
MS9397-15	1.062	.372- .432	1.07
MS9397-16	1.125	.435- .495	1 11
MS9397-17	1 188	.498- .558	1 15
MS9397-18	1.250	.560- .620	1 19
MS9397-19	1.312	.622- .682	1 23
MS9397-20	1.375	.685- .745	1 27

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9397-21	1 438	.748- .808	1 31
MS9397-22	1 500	.810- .870	1 35
MS9397-23	1 562	.872- .932	1 39
MS9397-24	1.625	.935- .995	1 43
MS9397-25	1.688	.998-1.058	1 47
MS9397-26	1 750	1 060-1 120	1 51
MS9397-27	1 875	1 185-1 245	1 59
MS9397-28	2 000	1 310-1 370	1 67
MS9397-29	2.125	1.435-1 495	1 75
MS9397-30	2.250	1.560-1 620	1 83
MS9397-31	2 375	1 685-1.745	1 91
MS9397-32	2 500	1.810-1 870	1 99
MS9397-33	2.625	1.935-1 995	2 07
MS9397-34	2 750	2 060-2 120	2 16
MS9397-35	2 875	2.185-2 245	2 24
MS9397-36	3 000	2 310-2 370	2 32

1. SHANK SHALL BE STRAIGHT WITHIN .003 FIR PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. INCOMPLETE THREADS NOT TO ENTER THE FILLET AREA
4. HEAD TO SHANK FILLET SHALL BE COLD ROLLED
5. MATERIAL STEEL AMS 6322 HARDNESS ROCKWELL C26-32
6. FINISH CADMIUM PLATE AMS 2400 DIMENSIONS SPECIFIED ARE AFTER PLATING
7. SURFACE ROUGHNESS AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT UPSET .FAD.
8. MANUFACTURING SPECIFICATION AMS 7452 EXCEPT HEAD MUST BE UPSET.
9. PART SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640
10. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED
11. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES LINEAR DIMENSIONS ± .010,
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS, AND AMS ARE SAE PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 9 May 52 REVISED

P.A USAF - AFSC Other Cust Navy- Wep	TITLE BOLT, TEE HEAD - AMS 6322, CHAMFERED, 190-32 UNJF-3A, CADMIUM PLATE	MILITARY STANDARD MS9397 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto

This standard has been approved by the Bureau (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.