
MS9434 (ASG)

FED SUP CLASS 5306

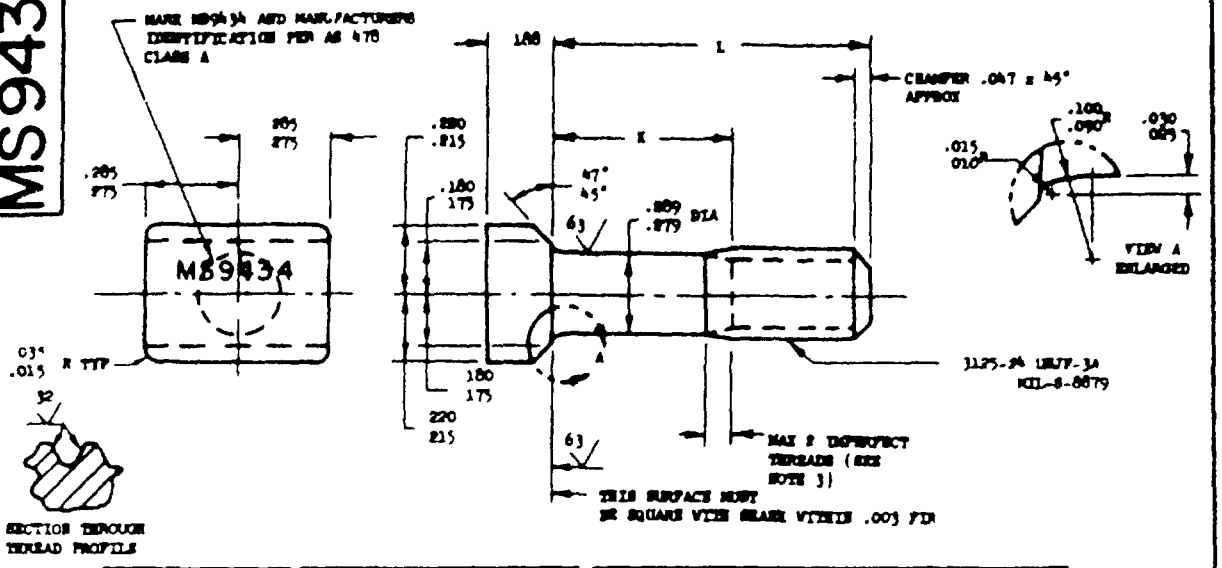

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9434-04	.500	.130- .150	2.17
MS9434-05	.562	.130- .150	2.28
MS9434-06	.625	.130- .150	2.39
MS9434-07	.688	.130- .150	2.50
MS9434-08	.750	.130- .150	2.61
MS9434-09	.812	.130- .150	2.72
MS9434-10	.875	.130- .150	2.84
MS9434-11	.938	.130- .150	2.95
MS9434-12	1.000	.130- .150	3.06
MS9434-13	1.062	.130- .150	3.18
MS9434-14	1.125	.190- .250	3.29
MS9434-15	1.188	.252- .312	3.40
MS9434-16	1.250	.315- .375	3.51
MS9434-17	1.312	.378- .438	3.63
MS9434-18	1.375	.440- .500	3.74
MS9434-19	1.438	.502- .562	3.85
MS9434-20	1.500	.565- .625	3.97
MS9434-21	1.562	.628- .688	4.08
MS9434-22	1.625	.690- .750	4.19
MS9434-23	1.688	.752- .812	4.30
MS9434-24	1.750	.815- .875	4.42
MS9434-25	1.875	.940-1.000	4.54
MS9434-26	2.000	1.065-1.125	4.87
MS9434-27	2.125	1.190-1.250	5.09
MS9434-28	2.250	1.315-1.375	5.32
MS9434-29	2.375	1.440-1.500	5.55
MS9434-30	2.500	1.565-1.625	5.77

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9434-31	2.625	1.690-1.750	6.00
MS9434-32	2.750	1.815-1.875	6.22
MS9434-33	2.875	1.940-2.000	6.45
MS9434-34	3.000	2.065-2.125	6.67
MS9434-35	3.125	2.190-2.250	6.90
MS9434-36	3.250	2.315-2.375	7.13
MS9434-37	3.375	2.440-2.500	7.35
MS9434-38	3.500	2.565-2.625	7.58
MS9434-39	3.625	2.690-2.750	7.80
MS9434-40	3.750	2.815-2.875	8.03
MS9434-41	3.875	2.940-3.000	8.25
MS9434-42	4.000	3.065-3.125	8.48
MS9434-43	4.125	3.190-3.250	8.71
MS9434-44	4.250	3.315-3.375	8.93
MS9434-45	4.375	3.440-3.500	9.16
MS9434-46	4.500	3.565-3.625	9.38
MS9434-47	4.625	3.690-3.750	9.61
MS9434-48	4.750	3.815-3.875	9.83
MS9434-49	4.875	3.940-4.000	10.06
MS9434-50	5.000	4.065-4.125	10.29
MS9434-51	5.125	4.190-4.250	10.51
MS9434-52	5.250	4.315-4.375	10.74
MS9434-53	5.375	4.440-4.500	10.96
MS9434-54	5.500	4.565-4.625	11.19
MS9434-55	5.625	4.690-4.750	11.41
MS9434-56	5.750	4.815-4.875	11.64
MS9434-57	5.875	4.940-5.000	11.86
MS9434-58	6.000	5.065-5.125	12.09

1. SHANK SHALL BE STRAIGHT WITHIN .003 FIR PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. INCOMPLETE THREADS NOT TO ENTER THE FILLET AREA
4. HEAD TO SHANK FILLET SHALL BE COLD ROLLED
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735
6. SURFACE ROUGHNESS: AS 291, UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICRO INCHES EXCEPT UPSET HEAD
7. MANUFACTURING SPECIFICATION: AMS 7478 EXCEPT HEAD MUST BE UPSET
8. PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645
9. BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED
10. DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± 0.0,

. DO NOT USE CHARGEABLE PART NUMBERS
AS & AMS ARE SAE PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE AIRCRAFT AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 21 DEC 62 REVISED

P.A. AF - AFSC Other Cust NAVY - AER	TITLE BOLT, TEE HEAD - AMS 5735, CRANKNECK, 1125-9A UNJF-3A	MILITARY STANDARD MS9434 (ASG)
PROCUREMENT SPECIFICATION N.A.	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited reproduction)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.