
MS9687

FED SUP CLASS 5306

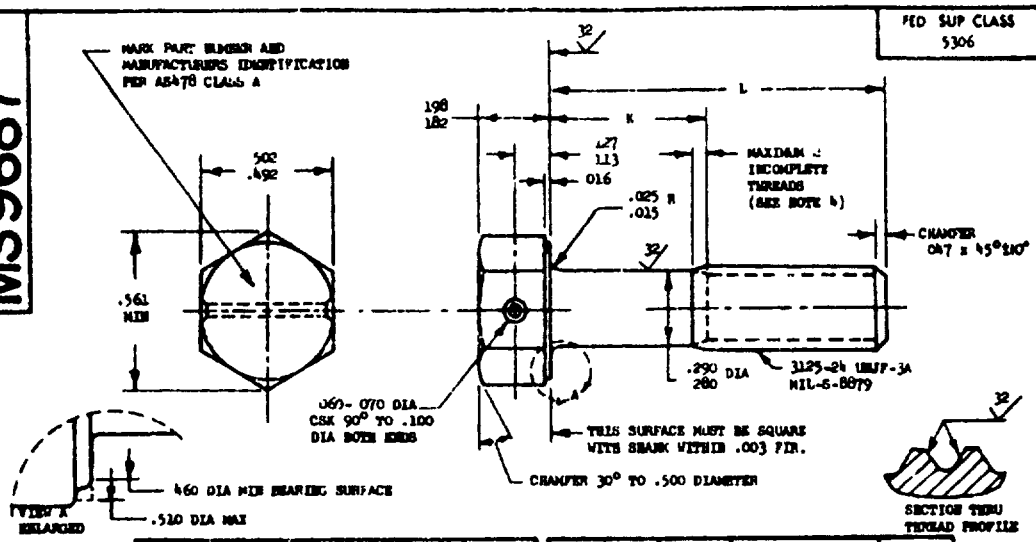

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9687-04	.500	.088-.108	2.12
MS9687-05	.562	.088-.108	2.23
MS9687-06	.625	.088-.108	2.34
MS9687-07	.688	.088-.108	2.45
MS9687-08	.750	.088-.108	2.56
MS9687-09	.812	.088-.108	2.67
MS9687-10	.875	.088-.108	2.79
MS9687-11	.938	.088-.108	2.90
MS9687-12	1.000	.088-.125	3.01
MS9687-13	1.062	.128-.180	3.13
MS9687-14	1.125	.190-.250	3.24
MS9687-15	1.188	.252-.312	3.35
MS9687-16	1.250	.315-.375	3.46
MS9687-17	1.312	.378-.438	3.58
MS9687-18	1.375	.440-.500	3.69
MS9687-19	1.438	.502-.562	3.80
MS9687-20	1.500	.565-.625	3.92
MS9687-21	1.562	.628-.688	4.03
MS9687-22	1.625	.690-.750	4.14
MS9687-23	1.688	.752-.812	4.25
MS9687-24	1.750	.815-.875	4.37
MS9687-25	1.812	.878-.938	4.48
MS9687-26	1.875	.940-1.000	4.59
MS9687-27	1.938	1.002-1.062	4.71
MS9687-28	2.000	1.065-1.125	4.82
MS9687-29	2.125	1.190-1.250	5.04
MS9687-30	2.250	1.315-1.375	5.27
MS9687-31	2.375	1.440-1.500	5.50
MS9687-32	2.500	1.565-1.625	5.72
MS9687-33	2.625	1.690-1.750	5.95
MS9687-34	2.750	1.815-1.875	6.17
MS9687-35	2.875	1.940-2.000	6.40
MS9687-36	3.000	2.065-2.125	6.62
MS9687-37	3.125	2.190-2.250	6.85
MS9687-38	3.250	2.315-2.375	7.08
MS9687-39	3.375	2.440-2.500	7.30
MS9687-40	3.500	2.565-2.625	7.53
MS9687-41	3.625	2.690-2.750	7.75
MS9687-42	3.750	2.815-2.875	7.98
MS9687-43	3.875	2.940-3.000	8.20
MS9687-44	4.000	3.065-3.125	8.43
MS9687-45	4.125	3.190-3.250	8.66
MS9687-46	4.250	3.315-3.375	8.88
MS9687-47	4.375	3.440-3.500	9.11
MS9687-48	4.500	3.565-3.625	9.33
MS9687-49	4.625	3.690-3.750	9.56
MS9687-50	4.750	3.815-3.875	9.78
MS9687-51	4.875	3.940-4.000	10.01
MS9687-52	5.000	4.065-4.125	10.24
MS9687-53	5.125	4.190-4.250	10.46
MS9687-54	5.250	4.315-4.375	10.69
MS9687-55	5.375	4.440-4.500	10.91
MS9687-56	5.500	4.565-4.625	11.14
MS9687-57	5.625	4.690-4.750	11.36
MS9687-58	5.750	4.815-4.875	11.59
MS9687-59	5.875	4.940-5.000	11.81
MS9687-60	6.000	5.065-5.125	12.04

1. SHANK SHALL BE STRAIGHT WITHIN .003 TOTAL PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .015 FIR
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL STEEL AMS 6304
6. HARDNESS ROCKWELL C42-46
7. FINISH DIFFUSED NICKEL CADMIUM PLATE PER AMS 2416 DIMENSIONS SPECIFIED ARE AFTER PLATING CONTACT POINTS PERMISSIBLE.
8. MANUFACTURING SPECIFICATION AMS 7459
9. MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING
10. SURFACE TEXTURE USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
12. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 8 Jul 71 REVISED

P.A. Air Force-11 Other Cust Navy-AS	INTERNATIONAL INTEREST AGCC AIR STD 17/2	TITLE: BOLT, MACHINE - HEXAGON HEAD, DRILLED 1 HOLE, PD SHANK, STEEL AMS 6304, DIFFUSED NICKEL CADMIUM PLATE, 3125-24 UNJF-3A	MILITARY STANDARD MS9687
PROCUREMENT SPECIFICATION AMS7458	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the Department of the Navy and is mandatory for use by that activity. All other activity activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.