MIL-W-14746B (AR)
16 October 1980
SUPERSEDING
MIL-W-14746A (MU)
15 May 1969

MILITARY SPECIFICATION

WARHEAD, GUIDED MISSILE, HE, M155 LOADING, ASSEMBLING, AND PACKING

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the quality assurance provisions and special requirements not covered by the drawings pertaining to the loading, assembling and packing of high explosive warhead designated as Warhead, Guided Missile, HE, M155.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-C-401	-Composition B
MIL-A-512	-Aluminum Powder, Flaked, Grained and Atomized (for use in Ammunition)
MIL-C-13573	-Calcium Chloride
MIL-C-18164	-Composition D-2.
MIL-C-46652	-Composition B-4.
MIL-A-48078	-Ammunition, Standard Quality Assurance Provisions, General Specification For.
MIL-C-51077	-Calcium Silicate, Technical.

FSC: 1336

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-453 -Inspection, Radiographic

DRAWINGS

ORDNANCE CORPS

9226300 -Warhead, Guided Missile, HE, M155 Loading, Assembly and Marking.
9211595 -Crate, Packing Ammunition, Dual, for Warhead, Guided Missile, HE, M155.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Material. - Materials and parts shall be in accordance with applicable drainges and specifications.

3.2 Components and Assemblies. - The components and assemblies shall comply with all requirements specified on Drawing (dwg.) 9226300 and associated drawings, specificaions and standards.

3.3 Composition of Explosive Charge. - The composition of the explosive charge shall be as follows:

INGREDIENTS	PERCENTAGE BY WEIGHT
Composition B-4 (MIL-C-46652, Type I)	73.9 plus or minus 6
Aluminum (MIL-A-512, Type III, Grade F, Class 7)	20.9 plus or minus 3
Composition D-2 (MIL-C-18164)	4.7 plus or minus 1 (advisory)
Calcium Chloride (MIL-C-13573)	0.5 plus or minus 0.1

3.3.1 Alternative Composition. - An alternative charge composition shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

INGREDIENTS	PERCENTAGE BY WEIGHT
Composition B (MIL-C-401, Type I, Grade A)	73.9 plus or minus 6
Aluminum (MIL-A-512, Type III, Grade F, Class 7)	20.9 plus or minus 3
Composition D-2 (MIL-C-18164)	4.7 plus or minus 1 (advisory)
Calcium Chloride (MIL-C-13573)	0.5 plus or minus 0.1
Calcium Silicate (MIL-C-51077) added	see below

The quantity, by weight, of calcium silicate shall not be less than 1.25 percent and not more than 1.75 percent of the actual quantity of TNT in the Composition B in the explosive charge mixture.

3.4 Weight

3.4.1 Assembly weight. - The assembly weight shall be as specified on dwg. 9226300.

3.4.2 Booster Cup Assembly weight. - The booster cup assembly weight shall be as specified on dwg. 9226312.

3.5 Radiographic examination. - For the determination of the defects in the explosive charge, the charge shall be divided into segments as defined by Figure 1.

3.5.1 Cracks. - Cracks in the explosive charge are permissible provided a charge separation does not exist. A charge separation is defined as the formation of a multi-segment charge caused by a crack, or cracks, extending entirely through the charge in any direction.

3.5.2 Cavities. - Cavities within the explosive charge shall not exceed the areas or dimensions specified in Table I. Porous areas shall be treated as cavities except that 80 percent of the projected length and 80 percent of the projected area shall be considered for acceptance purposes.

TABLE 1

	SEGMENT A	SEGMENT B	SEGMENT C	SEGMENT D	SEGMENT E
Sum of projected areas of all cavities (Square Inch)	2	1/2	1	2	2
Maximum projected length of any cavity (Inch)	1	1/2	2	2 1/2	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

3.5.3 Missing Explosive Components. - No component shall be missing from the charge initiating explosive train.

3.5.4 Qualifications. - Radiographic equipment, operators and procedures shall be qualified in accordance with Standard MIL-STD-453 prior to use in production.

3.6 Center of Gravity. - The center of gravity shall be as specified on dwg. 9226300 .

3.7 First Article Inspection. - This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples shall be as specified in the contract.

3.8 Workmanship. - Loading and assembling shall be accomplished in a thorough, workmanlike manner. All parts shall be free of molding defects (porosity, checks, cracks, chipped edges and scratches) dirt, grease, explosive on any exterior surface, corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. Surface coatings shall be continuous except for a few slight scratches not exposing base material. All required marking shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. - Unless otherwise specified in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of Inspections. - The following types of inspection shall be conducted on this item:

a. First Article Inspection

b. Quality Conformance Inspecton

4.3 First Article Inspection

4.3.1 Submission. - The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

Part Description	Drawings	Quantity
Warhead, Guided Missile, HE, M155	9226300	5
Booster Cup Assembly	9226312	5
Pellet, Booster	9226316	5

4.3.2 Inspections to be Performed. - See MIL-A-48078 and Table II specified herein.

4.3.3 Rejection. - See MIL-A-48078.

4.4 Quality Conformance Inspection

4.4.1 Inspection Lot Formation. - Inspection lots shall comply wilth the lot formation provisions of MIL-A-48078. In addition, inspection lots of loaded warheads shall contain:

a. A batch of explosive charge mixture ingredients from not more than two lots, from one manufacturer, of any ingredient.

b. A-5 or RDX pellets from not more than one batch or homogeneous blend of batches.

c. Inert parts from lots of the same lot interfix number from one manufacturer.

4.4.2 Examination. - See MIL-A-48078.

a. Sampling Plans. - Unless otherwise specified in the Classification of Defects and Tests Tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

TABLE II - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-14746B (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Warhead, Guided Missile, HE, M155, Components and Assemblies				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Warhead, Guided Missile, HE, M155				
	Loading, Assembly and Marking (Dwg. 9226300)				
	Examination for Defects	5		3.2	4.4.2.4, 4.4.2.5
	Weight	5		3.4.1	4.4.3.2
	Radiographic Examination	5		3.5	4.4.3.4/4.5.2
	Center of Gravity	5		3.6	4.4.3.5/4.5.4
	Booster Cup Assembly (Dwg. 9226312)				
	Examination for Defects	5		3.2	4.4.2.2
	Weight, min	5		3.4.2	4.4.3.3/4.5.3
	Booster Pellet (Dwg. 9226316)				
	Examination for Defects	5		3.2	4.4.2.1

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-14746B (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.1	Booster Pellet		9226316
			NEXT HIGHER ASSEMBLY 9226312

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Weight		0.40%	3.2	Scale
102	Diameter		0.40%	3.2	Gage
103	Length		0.40%	3.2	Gage
104	Cracks		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-14746B (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.2	Booster Cup Assembly		9226312
			NEXT HIGHER ASSEMBLY 9226300

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Cover loose or missing		0.40%	3.2	Visual/Manual
102	Length		0.40%	3.2	Gage
103	Weight, min.		100%	3.4.2	4.4.3.3/4.5.3
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-14746B (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Inert Parts Assembly		9226302
			NEXT HIGHER ASSEMBLY
			9226300

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Foreign matter on interior of inner body surface		0.40%	3.2	Visual
102	S&A housing cracked or damaged		0.40%	3.2	Visual
103	Aft cup damaged or loose		0.40%	3.2	Visual/Manual
104	Lugs damaged		0.40%	3.2	Visual
105	Leakage test acceptance test stamp missing (2 places)		0.40%	3.2	Visual
106	Foreign matter in booster node		0.40%	3.2	Visual
Minor					
201	Marking damaged		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Warhead, Guided Missile, HE, M155 Loading, Assembly and Marking (Prior to closing)	1 OF 1	9226300
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Charge not filled in and leveled		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5	Warhead, Guided Missile, HE, M155 Loading, Assembly and Marking	1 OF 1	9226300
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
MAJOR					
101	Booster cup above flush or loose inside S&A housing		0.40%	3.2	Visual/Manual
102	Closing plug loose or missing		0.40%	3.2	Visual/Manual
103	Marking missing, misleading or unidentifiable		0.40%	3.2	Visual
104	Weight missing		0.40%	3.2	Visual
105	Diameter, max		0.40%	3.2	Gage
106	Length, max		0.40%	3.2	Gage
107	Retainer loose or missing		0.40%	3.2	Visual/Manual
108	S&A housing cavity dimensions		0.40%	3.2	9246416
109	Weight		100%	3.4.1	4.4.3.2
110	Radiographic Examination		100%	3.5	4.4.3.4/4.5.2
111	Center of Gravity		100%	3.6	4.4.3.5/4.5.4
MINOR					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Crate, Packing (Prior to Sealing, With Warhead)	1 OF 1	9211595
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Holding plate missing or loose		0.40%	3.2	Visual/Manual
102	Warhead not seated properly		0.40%	3.2	Visual
103	Hold down strap missing, broken or insecure		0.40%	3.2	Visual/Manual
Minor					
201	Foreign matter inside crate		0.65%	3.2	Visual
202	Strapping improperly assembled		0.65%	3.2	Visual
203	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Crate, Packing (Sealed)		9211595
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Strapping missing, broken or loose		0.40%	3.2	Visual/Manual
102	Board broken, split or curled		0.40%	3.2	Visual
103	Skid missing or damaged excessively		0.40%	3.2	Visual
104	Contents exposed		0.40%	3.2	Visual
Minor					
201	Fastener missing or loose		0.65%	3.2	Visual/Manual
202	Strapping improperly assembled		0.65%	3.2	Visual
203	Nail protruding		0.65%	3.2	Visual
204	Marking missing, misleading or unidentifiable		0.65%	3.2	Visual
206	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Composition of Explosive Charge (see 3.3). - The Government Inspector shall monitor and verify the weighing of all ingredients used in each batch of explosive charge. That verification will serve as acceptance criteria for the calcium chloride and calcium silicate (if added) content of the batch. All other ingredients shall be verified by chemical analysis in accordance with 4.5.1. For analysis, three (3) sample wafers of approximately 100 grams each shall be taken from the batch, at the pouring spout, during the pour. One each of the wafers shall be taken near the beginning, at approximately the middle and near the end of each batch. One quarter of each wafer shall be ground and thoroughly blended with other wafers, and the required sample selected for analysis. Failure of a sample in meeting one or more of the requirements shall reject the represented batch.

4.4.3.2 Assembly Weight (see 3.4.1). - This determination shall be performed 100 percent, using inspection equipment specified in 4.4.4. Any assembly failing to meet the requirement shall be classed defective and removed from the lot.

4.4.3.3 Booster Cup Assembly Weight, Minimum (see 3.4.2). - This determination shall be performed 100 percent and shall be conducted in accordnce with 4.5.3, using inspection equipment specified in 4.4.4. Any assembly failing to meet the minimum weight requirement shall be classed defective and removed from the lot".

4.4.3.4 Radiographic Examination (see 3.5). - This determination shall utilize the equipment, operations, and procedures qualified under 3.5.4 as specified in 4.5.2 and shall be performed 100 percent. Any assembly failing to meet one or more of the requirements shall be classed defective and removed from the lot.

4.4.3.5 Center of Gravity of Loaded Warhead (see 3.6). - This test shall be performed 100 percent and shall be conducted in accordance with 4.5.4 using inspection equipment specified in 4.4.4. Any assembly failing to meet the specified requirement shall be classified defective and removed from the lot.

4.4.4 Inspection Equipment. - The inspection equipment required to perform the examinations and tests prescribed herein, is described in the "Paragraph Reference/Inspection Method" column

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

in the tables starting with paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the tirms of the contract. See Section 6 of MIL-A-48078 and 6.2 herein.

4.5 Test Methods and Procedures

4.5.1 Composition of Explosive Charge (see 6.4).

4.5.1.1 Explosive content determination. - An accurately weighed 1.00 gram portion of the sample (see 4.4.3.1) shall be transferred to a tared medium porosity sintered glass crucible. The sample shall be extracted 8 times with 20 milliliter (ml.) poritons of cold acetone (approximately 5 degrees Centigrade (C.)). After completion of the extraction, the cruicble and residue shall be dried in an oven maintained at approximately 60 degrees C. for 5 minutes, cooled in a desiccator and weighed. (Reserve the crucible and content for the D-2 determination). The percent explosive shall be calculated as follows:

*percent explosive = 100 (W2 - W3) divided by WS where:

W2 = weight of crucible and sample
W3 = weight of crucible and residue after drying
WS = original weight of sample

*This percentage includes the nitrocellulose from composition D-2.

4.5.1.2 Composition D-2 Content Determination. - The residue in the crucible reserved from the explosive content determination shall be extracted with four 10 ml. portions of chloroform. The crucible and contents shall then be dried in an oven at approximately 65 degrees C. for a half hour, cooled in a desiccator and weighed. The percent D-2 shall be calculated as follows:

Percent D-2 = 116 (W3 - W4) divided by WS where:

W3 = weight of crucible and residue from the explosive determination.
W4 = weight of crucible and residue after drying
WS = original weight of sample
116 = factor for nitrocellulose removed in explosive determination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

4.5.1.3 Aluminum Content Determination. - The aluminum content shall be calculated as the difference between 100 percent and the sum of the calcium chloride and calcium silicate content, if added or as contained in Composition B-4, and the analytical results of 4.5.1.1 and 4.5.1.2.

4.5.2 Radiographic Examination. - The warhead shall be radiographically examined by directing the beam perpendicular to the plane of the warhead depicted in Figure 1. Examination of the negatives shall be made for the absence of an explosive train component, for charge defects in excess of those permitted by 3.5 and for a crack, or cracks, causing a charge separation.

4.5.3 Booster Cup Assembly Weight. - The assemblies shall be weighed to verify the presence of the booster pellet. Assemblies may be weighed individually or in any quantities not greater than twelve, with prior approval of the responsible Government technical agency.

4.5.4 Center of Gravity. - The longitudinal center of gravity of the loaded warhead shall be determined and recorded for each warhead. The warhead center of gravity shall comply to the requirements of dwg. 9226300.

5. PACKAGING.

5.1 Packing and Marking

5.1.1 Level A. - The loaded warhead shall be packed and marked in accordance with Dwg. 9211595.

5.2 Data Cards. - Data cards information shall be prepared for each lot in accordance with the information specified in Specification MIL-STD-1167.


6. NOTES

6.1 Intended Use. - The components and assemblies covered by this specification are intended for use in the Improved Hawk Guided Missile.

6.2 Ordering Data. - See MIL-A-48078.

6.3 Submission of Designs for Approval. - See 6.2.3. of MIL-A-48078. Submit equipment designs, as required, to Commander, ARRADCOM, ATTN: DRDAR-QAR-I, Dover, New JErsey 07801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

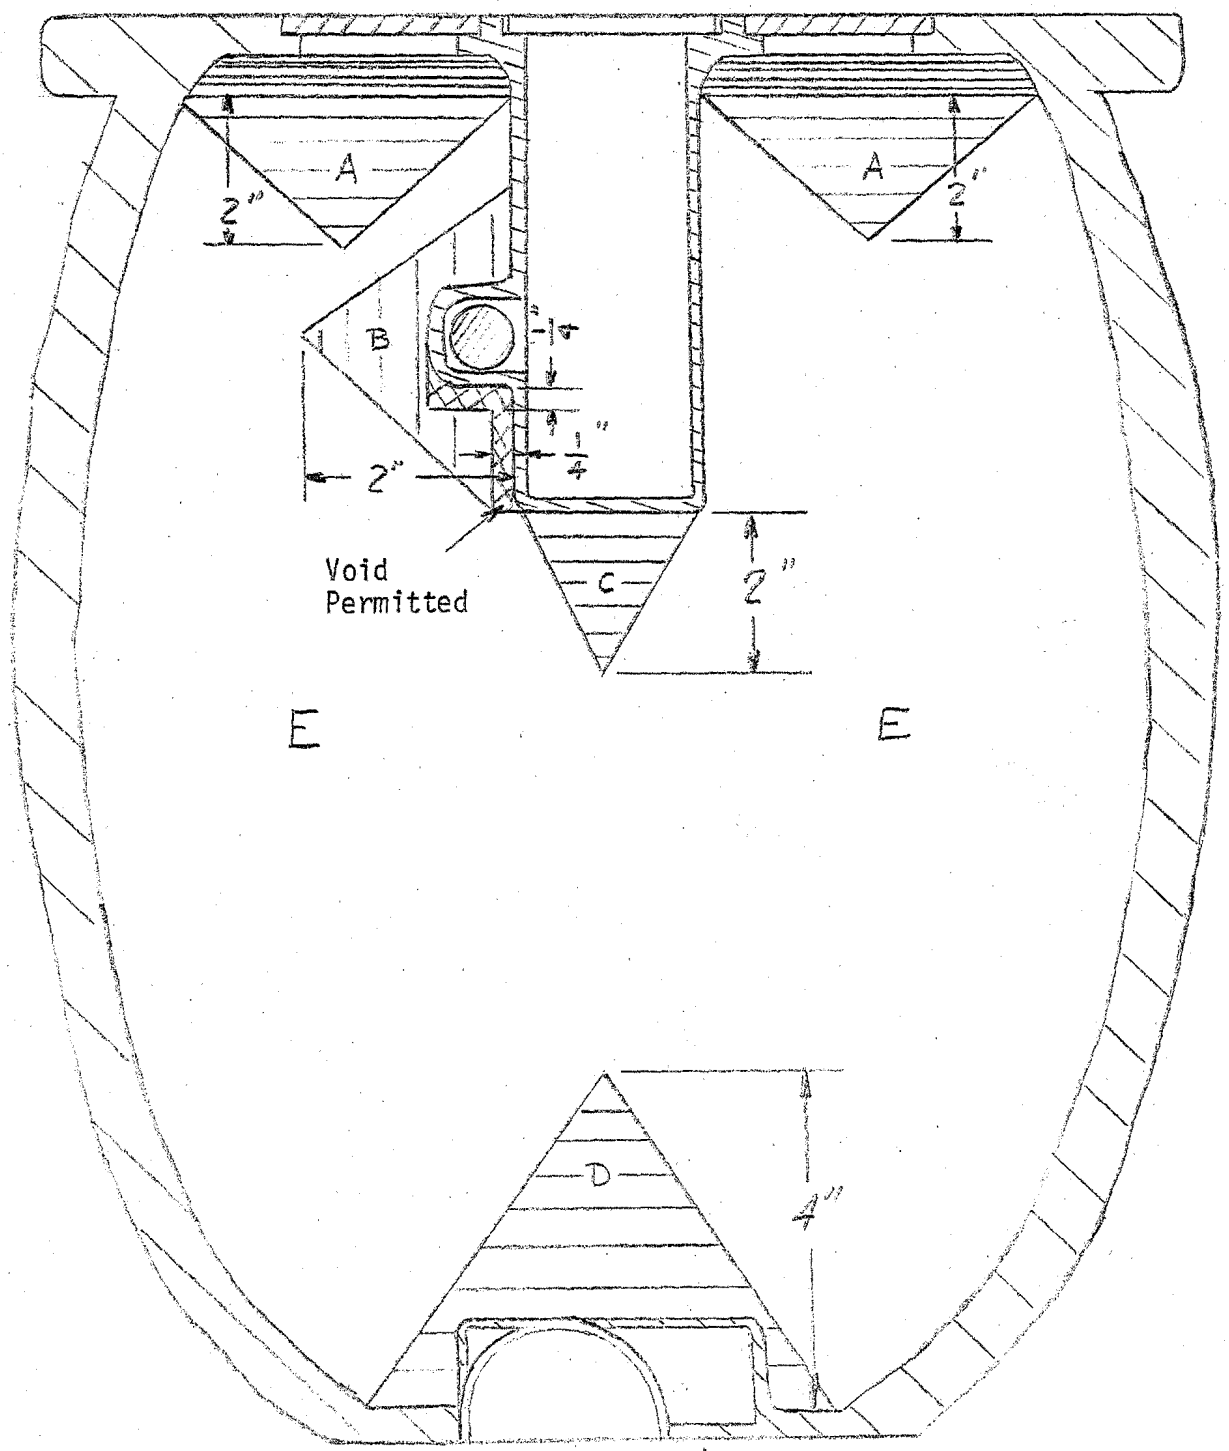

M155 Cavitation Zones
0° Position

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

6.4 Composition of Explosive Charge. - The contractor may use, with prior approval of the responsible Government technical agency, other methods and procedures than those detailed in 4.5.1 for determining the analysis of the explosive charge.

6.5 Reusable Shipping Containers. - The contractor should, when possible, utilize for shipment of the loaded units, the containers in which the unloaded warheads are received.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project Number: 1336-A347

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-W-14746B Warhead, GM, HE, M155 LAP

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T04:40Z
Check the source to verify that this is the current version before use.