MILITARY SPECIFICATION

GLASSES, DARK ADAPTATION

This specification has been approved by the Naval Air Systems Command, Department of the Navy.

1. SCOPE

1.1 Scope - This specification covers the requirements for one type of plastic glasses for dark adaptation purposes.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-B-613	Brass (Copper-Zinc Alloy), Leaded and Non-Leaded; Plate, Rolled Bar, Sheet and Strip
QQ-W-321	Wire, Brass
UU-P-553	Paper, Wrapping, Tissue
PPP-B-636	Boxes, Fiberboard
PPP-B-665	Boxes, Paperboard, Metal Stayed
PPP-B-676	Boxes, Set-up, Paperboard

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

STANDARDS

Military (Continued)

MIL-STD-129 Marking for Shipment and Storage

(When requesting any of the applicable documents, refer to both title and number. All requests should be made via the cognizant Government quality assurance representative. Copies of this specification and other unclassified specifications, standards, and drawings required by the contractors in connection with specific procurement functions should be obtained upon application to the Commanding Officer, Naval Publications and Forms Center (Code 1051), 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120.)

3. REQUIREMENTS

3.1 First article inspection - Unless otherwise specified, the dark adaptation glasses furnished under this specification shall be a product which has been inspected and passed the first article inspections specified in Section 4.

3.2 Materials - Materials shall conform to applicable specifications as specified herein. Materials for which there are no applicable specifications, or which are not specifically described herein, shall be of the best quality and entirely suitable for the purpose intended.

3.2.1 Frame -

3.2.1.1 Brow bar and nose bridge - The brow bar and nose bridge shall be injection molded from a first grade, nearly opaque and black virgin cellulose acetate material. Not more than 15 percent of imperfect parts, sprues, or runners of the same composition material shall be used with the virgin molding material.

3.2.1.2 Temple butt - The temple butt shall be injection molded from a first grade, virgin cellulose acetate butyrate material that is nearly opaque and dark. Not more than 15 percent of imperfect parts, sprues, or runners of the same composition material shall be used with the virgin molding material.

3.2.1.3 Tubing - The tubing used for the temple shall be extruded from clear cellulose acetate butyrate material.

3.2.1.4 Rivets - The rivets used to secure the temple to the brow bar shall be fabricated from brass wire conforming to QQ-W-321, Composition B.

3.2.1.5 Temple hinge - The temple hinge shall be fabricated from brass or 10 percent nickel silver. When brass is used it shall conform to the requirements

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:11Z
Check the source to verify that this is the currentversion before use.

of QQ-W-321, Composition A, or QQ-B-613, Composition 1. When nickel silver is used it shall conform to the nominal composition specified in Table I.

3.2.1.6 Metal butt and cable (core and winding) - The metal butt and cable (core and winding) shall be fabricated from optical metal or nickel silver of nominal composition as shown in Table I.

TABLE I

NOMINAL COMPOSITION OF OPTICAL METAL AND NICKEL SILVER

MATERIAL	COPPER	TIN	ZINC	NICKEL
Optical metal	90%	6%	4%	-
Nickel Silver	65%	25%	-	10%

3.2.2 Lens - The lens material shall be a slow burning cellulose acetate sheet having a dominant red hue.

3.2.2.1 Spectral transmittance - Between the wavelengths 400 to 580 millimicrons, the lens shall transmit no greater than 0.2 percent of the incident light. For wavelengths from 580 to 760 millimicrons the rod and cone stimulation factors shall be determined in accordance with Section 4. The sum of the products of the constant factors for the cones and the transmittances of the filter at the stated intervals shall equal or exceed 115 units and shall be at least 18.0 times greater than the sum of the products of the constant factors for the rods and the transmittance of the filters at the same wavelengths.

3.2.2.2 Optical quality - The lens shall be of good optical quality so that visual acuity shall not be materially changed. (See 4.5.4.)


3.2.2.3 Visible defects - The lens material shall be clean and free from superficial undulations, lenticulations, striae, bubbles, seeds, scratches, opaque particles, or any other imperfections detectable with unaided vision which will impair the visual properties. (See 4.5.5.)

3.3 Design and construction -

3.3.1 Frame - The frame shall conform to the design, shape and dimensions shown on Figures 1 through 4 and the following:

3.3.1.1 The vertical and horizontal angles of the two temples shown on Figures 1 and 3 shall be substantially matched and shall provide a satisfactory fit at the mitered joints with the brow bar. The assembly shall be such that the lens will be supported in the proper position before the eyes of the wearer.


Source: https://assist.dla.mil -- Downloaded: 202610-19T11:11Z
Check the source to verify that this is the currentversion before use.

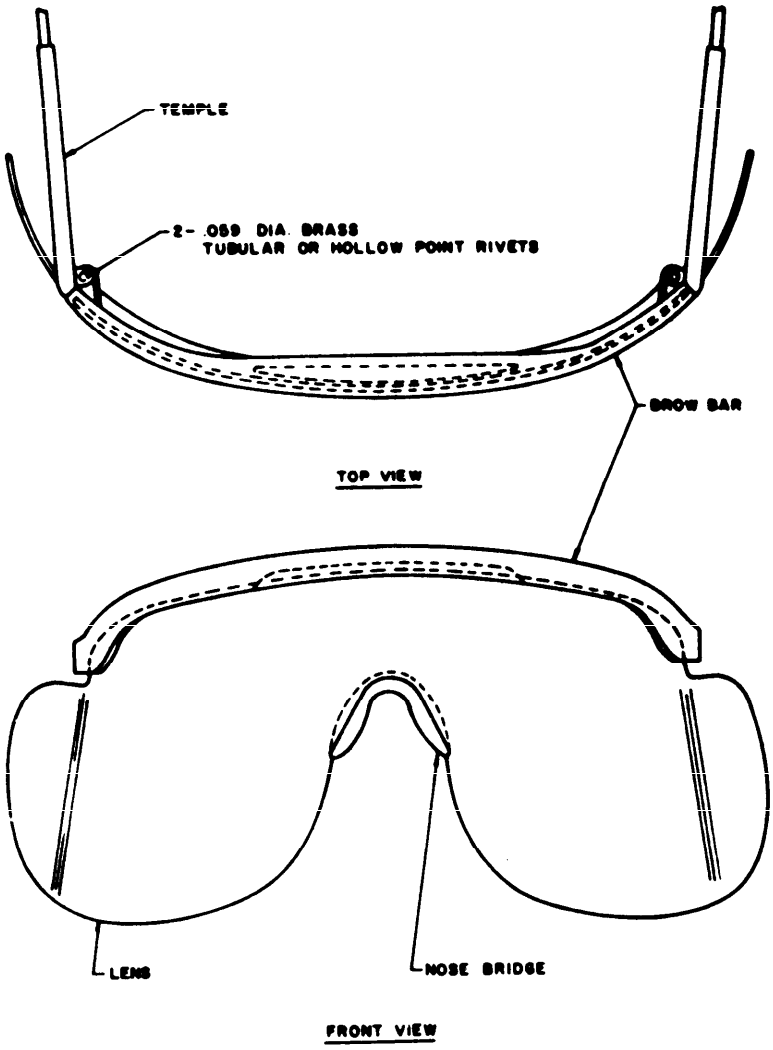

DIMENSIONS IN INCHES. TOLERANCE: ±.010.

FIGURE 1. DARK ADAPTATION GLASSES, ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

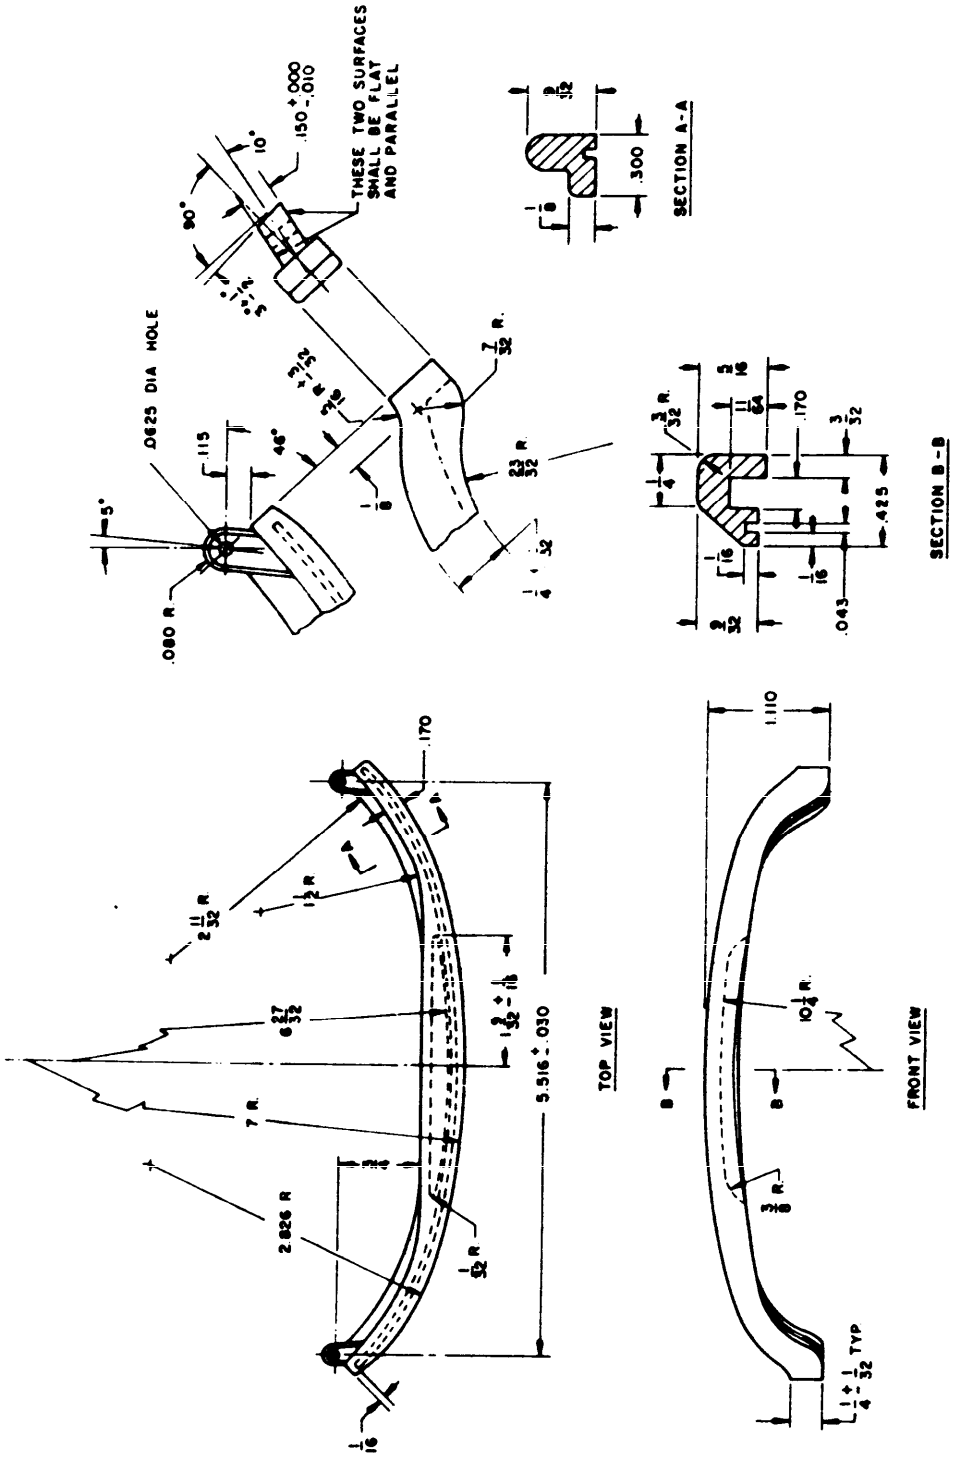

DIMENSIONS IN INCHES. TOLERANCES: UNLESS OTHERWISE SPECIFIED, DECIMALS ±.010, WHOLE NUMBERS AND FRACTIONS ±1/64, DEGREES ±1/2°.

FIGURE 2. BROW BAR DETAILS


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

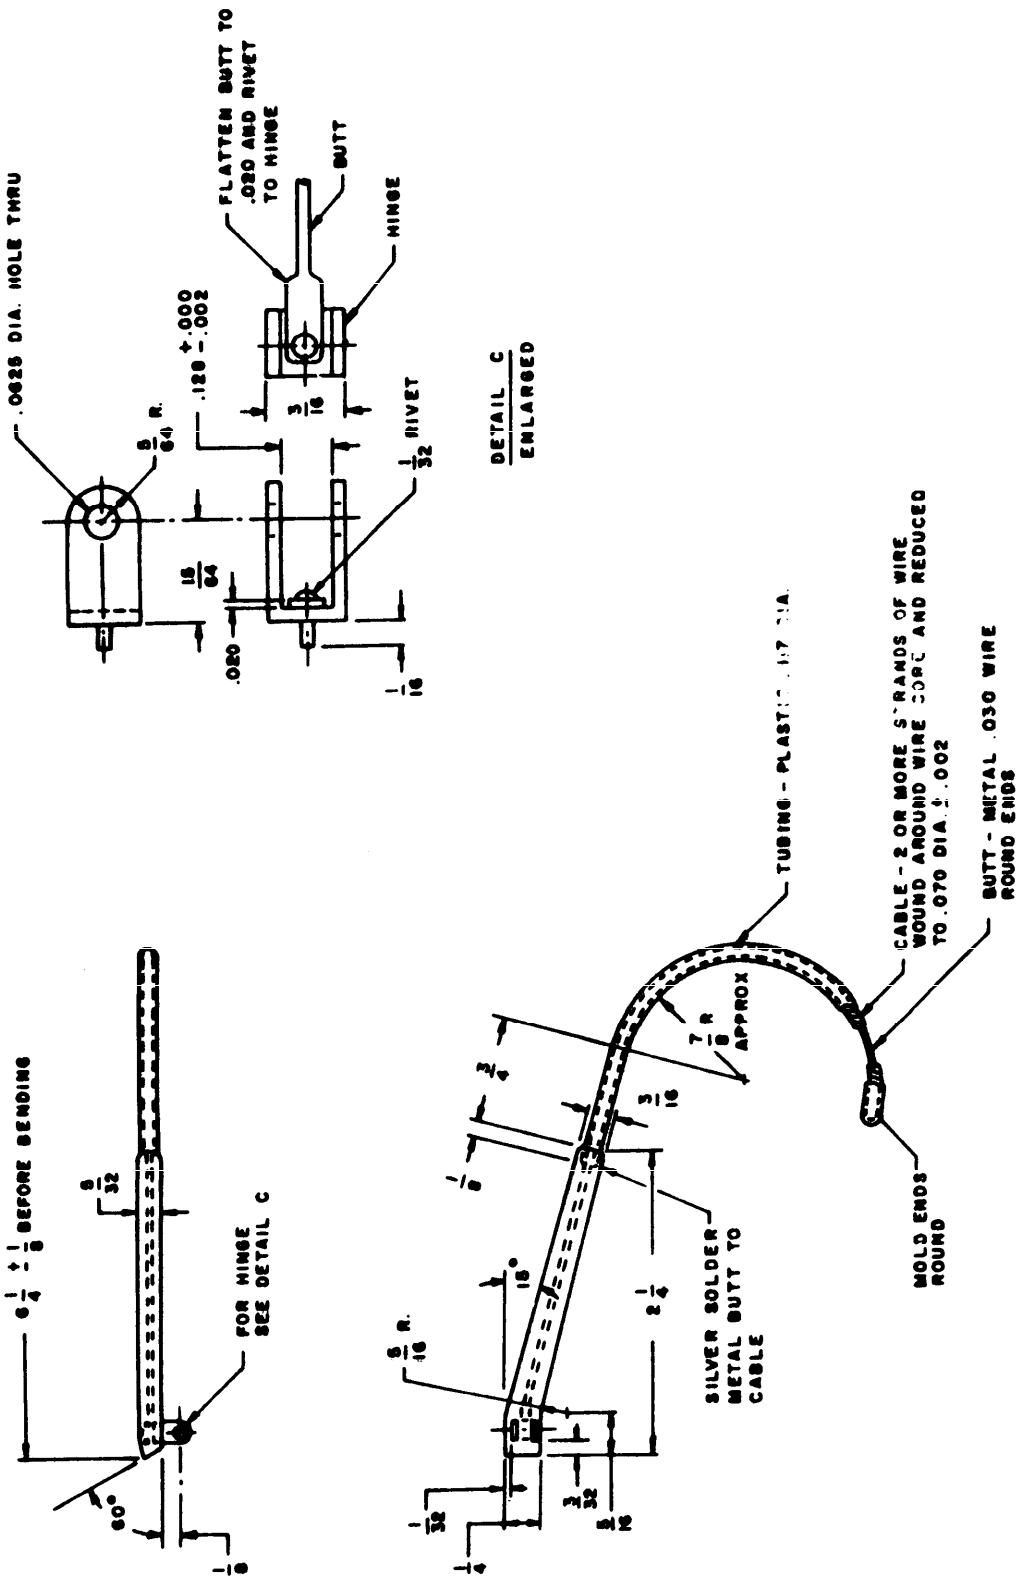

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.010, ANGLES ±1/2°.

FIGURE 3. TEMPLE DETAILS

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:11Z
Check the source to verify that this is the current version before use.

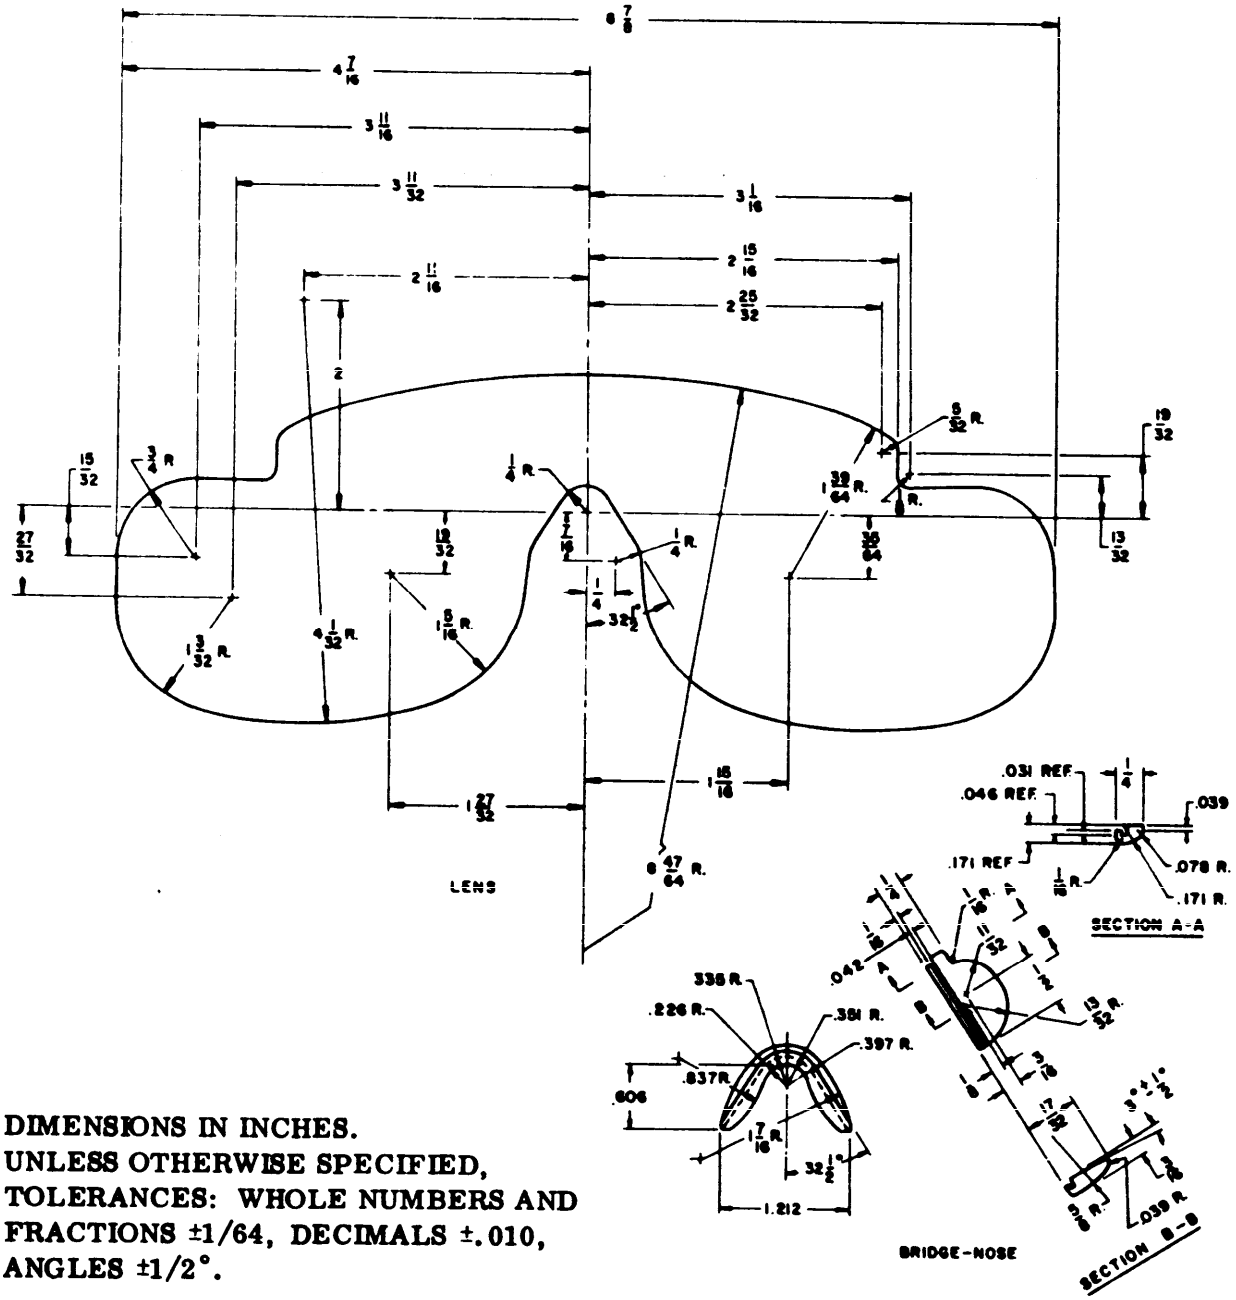

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED,
TOLERANCES: WHOLE NUMBERS AND
FRACTIONS ±1/64, DECIMALS ±.010,
ANGLES ±1/2°.

FIGURE 4. LENS AND NOSE BRIDGE DETAILS

Source: https://assist.dla.mil -- Downloaded: 20260-19T11:11Z
Check the source to verify that this is the currentversion before use.

3.3.1.2 The mating barrels of the hinges shall form a snug fit and shall be held together with a rivet so that there is no appreciable looseness to permit angular up and down movement of the temple with respect to the front. The rivet shall be permanently and securely set.

3.3.1.3 The plastic temple butt and tubing shall be securely and permanently cemented together. The tubing shall be permanently heat-sealed on the end.

3.3.1.4 The hinge shall be securely spot-welded, soldered, or securely riveted to the temple butt insert.

3.3.1.5 After fabrication, the hinge and temple shall be nickel plated prior to application of plastic covering on the temple.

3.3.1.6 The brow bar shall be securely and permanently attached to the lens by 5 pins, and the nose bridge securely and permanently cemented to the lens.

3.3.2 Lens -

3.3.2.1 The lens shall be blanked or cut to size, shape, and contour as shown in Figure 4. The edges of the lens shall be free from cracks or roughness and shall have a smooth finish.

3.3.2.2 After complete assembly the lens shall be clean. No labels or identification markings shall appear on the lens.

3.4 Aging - The assembled glasses shall pass the aging test described in Section 4.

3.5 Lens covering - Both sides of the lens of the finished glasses shall be covered with smooth finish paper to prevent damage to the lens. The lens covering shall be die-cut from one piece to the size and shape which would permit folding flat on itself to completely cover both front and back of lens excluding the brow bar.

3.5.1 Markings on lens covering - Instructions covering precautions and care of the lens and glasses shall consist of the specified wording, and shall be placed in the location on the outside front of the lens covering, as specified.

3.5.1.1 The words "Dark Adaptation Glasses - Instructions" shall be placed above the nose bridge.

3.5.1.2 On the left half of the lens covering, the following wording shall be placed:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

"Do not scratch the lens. The plastic lens of these glasses is shatter-resistant, safer, and lighter than glass lenses, but easily scratched if abused. When not in use, protect against dirt or hard objects. To make the lens last longer, remove dust and fingerprints by (1) washing with water or (2) steaming with breath."

3.5.1.3 On the right half of the lens covering, the following wording shall be placed:

"Then wipe dry with a soft clean cloth or toilet paper, making absolutely certain the cloth or paper is free of grit, sand, or dirt. Gasoline or hot water should not be used for cleaning.

"The flexible earpiece of the temple is easily adjusted for proper fit by gently forming with the fingers."

3.6 Performance - The glasses shall satisfactorily meet the following performance requirements when tested as specified in Section 4.

(a) Spectral transmittance

(b) Optical quality

(c) Lens examination

(d) Aging

3.7 Marking - Each pair of glasses shall be permanently and distinctly marked with the letters "USN" together with year of manufacture and name of manufacturer, brand name, or trade mark if such mark is readily identifiable with said manufacturer. The markings shall be placed on the brow bar or temple of the glasses.

3.8 Workmanship - Work shall be in accordance with high grade practice covering this type of work, and the glasses shall completely meet the Acceptance Quality Levels (AQL's) as specified in Section 4.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection - The inspection and testing of the dark adaptation glasses shall be classified as follows:

(a) First article inspection - First article inspection consists of tests and examinations performed on samples which are representative of the production item after award of a contract to determine that the production item meets the requirements of this specification.

(b) Quality conformance inspection - Quality conformance inspection consists of tests and examinations performed on individual products or lots to determine conformance of the products or lots to the requirements of this specification.

4.3 First article inspection - The first article inspection of the dark adaptation glasses shall consist of examinations and tests for all the requirements of this specification.

4.3.1 First article samples - Unless otherwise specified, as soon as practicable after the award of the contract or order, the manufacturer shall submit five pairs of glasses and two sheets of lens material 6 x 9 inches in size, as first article samples. The samples shall be representative of the construction, workmanship and materials to be used during production. When a manufacturer is in continuous production of these dark adaptation glasses from contract to contract, submission of further first article samples on the new contract may be waived at the discretion of the procuring activity. Approval of the first article samples or the waiving of first article inspection does not preclude the requirement for performing the quality conformance inspection. The first article samples shall be furnished to the Government as directed by the Contracting Officer (see 6.2). The samples shall be identified with the following information:

Samples submitted by (name) (date) for first article inspection in accordance with the requirements of MIL-G-22112(AS).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

4.3.1.1 Upon the completion of the first article inspection, all the applicable inspection reports and, when applicable, recommendations and comments pertinent for use in monitoring production will be forwarded to the cognizant Government activity. One approved first article sample shall be returned to the manufacturer for use in monitoring production. The remaining samples will be consumed or destroyed in the first article inspection and shall not be considered as part of the quantity to be delivered under contract.

4.4 Quality conformance inspection - The sampling and inspection levels shall conform to MIL-STD-105. The quality conformance inspection shall consist of the following:

Visual examination
Spectral transmittance
Optical quality
Lens examination
Aging

4.4.1 Sampling -

4.4.1.1 Inspection lot - An inspection lot shall be expressed in units of one pair of dark adaptation glasses made under essentially the same conditions and from the same materials. The sample unit shall be one pair of dark adaptation glasses.

4.4.1.2 Preparation for delivery - An inspection lot shall be expressed in units of one fully prepared shipping container, containing a pair of dark adaptation glasses fully prepared for delivery made from essentially the same materials and components. The sample unit shall be one shipping container, fully prepared for delivery with the exception it need not be sealed.

4.4.1.3 Sampling for examination and tests of the dark adaptation glasses - The sample size, acceptance criteria, examinations and tests required for the glasses shall be as specified in Table II.

4.5 Inspection methods -

4.5.1 Visual examination - Each pair of dark adaptation glasses selected in accordance with Table II, shall be examined visually to determine conformance with this specification. The classification of defects, Table III, shall be used to classify the defects found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

TABLE II

SAMPLE SIZE, ACCEPTANCE CRITERIA, EXAMINATIONS AND TESTS OF THE GLASSES

INSPECTION	METHOD PARAGRAPH	SAMPLE SIZE	ACCEPTANCE CRITERIA 1/
Visual examination	4.5.1	Every unit for critical defects. Inspection Level II for minor defects.	Reject all units with any critical defects and an Acceptable Quality Level of 15.0 defects per 100 units for minor defects
Spectral transmittance	4.5.3	Inspection Level S-2	An Acceptable Quality Level of 1.5 defects per 100 units
Optical quality	4.5.4	Inspection Level S-2	An Acceptable Quality Level of 1.5 defects per 100 units
Lens examination	4.5.5	Inspection Level S-2	An Acceptable Quality Level of 1.5 defects per 100 units
Aging test	4.5.6	Inspection Level S-2	An Acceptable Quality Level of 1.5 defects per 100 units
Preparation for delivery	4.5.2	Inspection Level S-2	An Acceptable Quality Level of 4.0 defects per 100 units

1/ The sampling plan acceptance number shall apply collectively to all the characteristics within a stated acceptable quality level.

TABLE III

CLASSIFICATION OF DEFECTS FOR VISUAL EXAMINATION OF THE GLASSES

ITEM	DEFECT	MAJOR		MINOR
Quality of plastic	Not of specified material	X		
	Color or shade not as specified	X		
	Cut, tear, hole, burn, break or mend		*	
	Scratch, seed, bubble, opaque particle, crack, roughness, or other imperfection on lens		*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

TABLE III (Continued)

ITEM	DEFECT	MAJOR		MINOR
Quality of plastic (Continued)	Superficial undulation, lenticulation or striae which affects visual properties of lens	X		
	Discoloration, surface deterioration or delamination	X		
	Lens not transparent, not optically clear	X		
	Lens surface scraped or dulled		*	
	Finish not clean and smooth			X
	Cracks, weld marks, sink marks, dulling of surface or abrasion on plastic other than lens		*	
Quality of metal parts	Not of specified material	X		
	Component fractured, split, dented, bowed, sprung, slivered, burred, bent out of shape, broken, chipped, malformed, or otherwise impaired		*	
	Surface not smooth			X
	Seam, scale, rust, or corrosion		*	
Construction and Workmanship	Varies from specified design, contour or construction on drawing or approved sample	X		
	Any characteristic not in accordance with the specified requirements	X		
	Component missing	X		
	Component not attached as specified		*	
	Component malformed, bent out of shape or distorted	X		
	Temple bars not substantially matched or bar does not fit satisfactorily with the brow bar at the mitered joint		*	
	Mated barrel of the hinge loose, i.e., angular up and down movement of the temple permitted		*	
	Temple tubing not completely heat sealed on the end			X
	Tubing loose in plastic temple butt, i.e., not securely cemented together	X		
	Any area of no bond between lens and brow bar	X		

Source: https://assist.dla.mil -- Downloaded: 20261O-19T11:11Z
Check the source to verify that this is the currentversion before use.

TABLE III (Continued)

ITEM	DEFECT	MAJOR		MINOR
Construction and Workmanship (Continued)	Lens not attached as specified, e.g., not cemented in brow bar, not in brow bar lens groove, inserted incorrectly, etc.	X		
	Lens not centered in brow bar		*	
	Edge of lens cracked, rough, or not smooth finish		*	
	Label or identification marking appears on lens		*	
	Stain or discoloration on lens not readily removable as required	X		
	Evidence that hinge or temple is not nickel plated	X		
	Area of hinge not nickel plated			X
	Excess solder (when applicable) on hinge			X
	Evidence of burn or discoloration on hinge			X
	Rivet loose, i.e., not permanently or securely set		*	
	Rivet damaged in setting		*	
	Rivet inverted, e.g., head not on top when glasses are in wearing position			X
	Nose bridge loose, i.e., not securely cemented to lens	X		
	Nose bridge not properly positioned, e.g., crooked, set at angle, set in a reversed position, etc.		*	
	Flexible ear piece too rigid or too flexible to permit proper adjustment for fit of user or will not retain fit	X		
	Core winding does not extend from temple butt to heat seal at end of tubing			X
	Core winding is irregular or wound on core loosely			X
	Spots, drippings, runs, splatters or threads of cement on brow bar, nose bridge, temple or lens		*	
Identification Marking and Instruction Sheet	Identification marking missing, incomplete, illegible, misspelled, not specified size or type, not specified location or marking not of a permanent nature			X
	Instruction sheet missing	X		

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:11Z
Check the source to verify that this is the current version before use.

TABLE III (Continued)

ITEM	DEFECT	MAJOR		MINOR
Identification Marking and Instruction Sheet (Continued)	Cut, hole, tear or break in instruction sheet			X
	Any sliver, dirt spot, grease or foreign matter on instruction sheet		*	
	Instruction sheet not one piece, not shaped to completely cover both sides of lens, does not permit temple butts to be folded upon each other without touching lens			X
	Instructions vary from specified wording or wording is not placed as specified		*	

NOTE: Defects shown as an asterisk (*) are to be classified as follows:
Major defect - when seriously affecting serviceability or appearance.
Minor defect - when affecting serviceability or appearance, but not seriously.

4.5.2 Preparation for delivery - Each of the fully prepared shipping containers, containing dark adaptation glasses selected as a sample unit from the lot shall be visually examined to determine that the packaging, packing and marking conform to this specification. The classification of defects, Table IV, shall be used to classify the defects found.

TABLE IV

CLASSIFICATION OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECT
Marking (Exterior and Interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing. Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling Bulging or distortion of containers
Weight or content (Exterior and Interior)	Number of intermediate packages is more or less than required; gross/net weight exceeds requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

4.5.3 Spectral transmittance - Spectral transmittance shall be measured at a temperature of 25 ±2° C (77 ±3.6° F) in accordance with paragraph 1-3.8.1 of the American Standards Association, Method of Spectrophotometer Measurement for Color (Z58.7.1-1951), using a suitable spectrophotometer (such as the Beckman or the Hardy-General Electric) which is maintained and calibrated in accordance with the recommendations of the National Bureau of Standards. Spectral transmittance over the range from 580 to 760 millimicrons shall be determined for each 10 millimicron interval, and the following table shall be completed and shall comply with the requirements of Section 3.

WAVE LENGTH m mu	% TRANSMITTANCE T	ROD FACTORS R	R x T	CONE FACTORS C	C x T
580		.1856		.9225	
590		.1201		.8539	
600		.0754		.7545	
610		.0461		.6355	
620		.0282		.5071	
630		.0165		.3704	
640		.0095		.2563	
650		.0055		.1637	
660		.0031		.0972	
670		.0017		.0530	
680		.0010		.0292	
690		.0004		.0146	
700		.0002		.0075	
710		.0000		.0040	
720		.0000		.0021	
730		.0000		.0010	
740		.0000		.0006	
750		.0000		.0002	
760		.0000		.0002	
			Sum (R x T)		Sum (C x T)

(1) Sum (C x T) $\geq$ 115

(2) $\frac{\text{Sum (R x T)}}{\text{Sum (C x T)}} \leq 18.0$

4.5.4 Optical quality test - With unaided vision, any pattern of straight lines at a distance of at least five feet shall be observed through the lens as it is moved across the line of sight at a distance of about one foot from the eyes. If the visual image is distorted, the lens is of poor optical quality.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T11:11Z
Check the source to verify that this is the current version before use.

4.5.5 Lens examination - The lens, as mounted in the frame shall be visually examined for freedom from defects with any high powered light source. The entire surface of the lens, except the area 1/8 inch from the edge, shall be examined.

4.5.6 Aging test - Finished glasses complete with lens covering or separate lenses only, undergoing tests, shall be placed in a circulating air oven at a temperature of 65.5° C (150° F) for 24 hours, allowed one hour to return to normal at room temperature and then subjected to a reduced temperature of -23.3° C (-10° F) for 12 hours. The lens shall then be examined for presence of discoloration, bubbles, surface deterioration or delamination. The brow bar, nose bridge, temple butt, and tubing shall be free from cracks, weld marks, sink marks, warping and dulling of surface luster. The lens shall be secure to the brow bar and nose bridge. The plastic temple butt shall be securely bonded to the metal butt and the plastic tubing shall be securely bonded to the plastic temple butt. Rivets holding the hinges shall be securely set in the plastic brow bar.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging - Preservation and packaging shall be Level A or C as specified. (See 6.2.) Other than as specified in 5.1.1, no preservation shall be required.

5.1.1 Level A -

5.1.1.1 Unit packaging - Each pair of glasses shall be wrapped in tissue paper conforming to UU-P-553 and packaged snugly within a carton conforming to PPP-B-665 or PPP-B-676.

5.1.1.2 Intermediate packaging - Unit packages shall be packed in fiberboard boxes conforming to PPP-B-636, Type I or II, Grade W5c or W5s. The number of unit packages per intermediate container shall be as specified by the procuring activity.

5.1.2 Level C - The dark adaptation glasses shall be packaged to afford the minimum degree of protection necessary to prevent damage during shipment under environmental conditions and commercial modes of transportation.

5.2 Packing - Packing shall be Levels A, B, or C as specified. (See 6.2.)

5.2.1 Level A - Glasses, packaged as specified in 5.1.1.1, shall be packed in overseas exterior type containers conforming to PPP-B-636, Type I or II, Class 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T11:11Z
Check the source to verify that this is the current version before use.

5.2.2 Level B - Glasses packaged as specified in 5.1.1.1, shall be packed in domestic type containers conforming to PPP-B-636, Type I or II, Class 2.

5.2.3 Level C - Intermediate packages that require overpacking for acceptance by carriers shall be packed in exterior type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery, and shall meet, as a minimum, the requirements of the rules and regulations applicable to the mode of transportation selected.

5.3 Marking - Unit packages and intermediate containers shall be marked in accordance with MIL-STD-129. In no instance shall the exterior marking on the container disclose the classified nature of its contents.

6. NOTES

6.1 Intended use - The glasses covered by this specification are intended for use by flight personnel to provide dark adaptation prior to operations requiring night vision.

6.2 Ordering data - Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Quantity desired

(c) Whether first article inspection is waived (see 4.3.1)

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

(e) Name and address of the first article inspection laboratory (see 4.3.1)

*U.S. GOVERNMENT PRINTING OFFICE: 1969-393-088/S189

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:11Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTION

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL-G-22112B(AS) GLASSES, DARK ADAPTATION

ORGANIZATION *(If submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED *(Printed or typed name and activity)*	DATE

DD FORM 1 NOV 64 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE C-8279

Source: https://assist.dla.mil -- Downloaded: 202610-19T11:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Weapons Engineering Standardization Office (Code X)
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-19T11:11Z
Check the source to verify that this is the current version before use.