MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

SPRINGS

TO ALL HOLDERS OF DOD-STD-35-27A(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-27A(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	PAGE
v	10 November 1980	v	2 February 1979
1	10 November 1980	1	2 February 1979
2	10 November 1980	2	2 February 1979
3	10 November 1980	3	2 February 1979
4	10 November 1980	4	2 February 1979
9	10 November 1980	9	2 February 1979
10	10 November 1980	10	2 February 1979
25	2 February 1979	(Reprinted without change)	
26	10 November 1980	26	2 February 1979
27	10 November 1980	27	2 February 1979
28	2 February 1979	(Reprinted without change)	
37	10 November 1980	37	2 February 1979
38	10 November 1980	38	2 February 1979
39	10 November 1980	39	2 February 1979
40	10 November 1980	40	2 February 1979
41	10 November 1980	41	2 February 1979
42	10 November 1980	42	2 February 1979
43	10 November 1980	43	2 February 1979
44	2 February 1979	(Reprinted without change)	
49	2 February 1979	(Reprinted without change)	
50	10 November 1980	50	2 February 1979
51	2 February 1979	(Reprinted without change)	
52	10 November 1980	52	2 February 1979
53	10 November 1980	53	2 February 1979
67	2 February 1979	(Reprinted without change)	
68	10 November 1980	68	2 February 1979
77	2 February 1979	(Reprinted without change)	
78	10 November 1980	78	2 February 1979
79	10 November 1980	79	2 February 1979
80	2 February 1979	(Reprinted without change)	
89	10 November 1980	89	2 February 1979
90	2 February 1979	(Reprinted without change)	
95	2 February 1979	(Reprinted without change)	
96	10 November 1980	96	2 February 1979

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
107	10 November 1980	107	2 February 1979
108	10 November 1980	108	2 February 1979
109	10 November 1980	109	2 February 1979
110	2 February 1979	(Reprinted without change)	

2. THE FOLLOWING PAGES HAVE BEEN ADDED:

NEW PAGE	DATE	NEW PAGE	DATE
41a	10 November 1980	96a	10 November 1980
41b	10 November 1980	96b	10 November 1980

3. RETAIN THIS NOTICE PAGE AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of DOD-STD-35-27A(MI) will verify that page changes and additions indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-ER
Army-ME
Army-MR
Army-SG
Army-CR

User activity:
Army - AR

Preparing activity:
Army - MI

(Project EDS-A316)

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Issues of documents	4
	2.2	Other publications	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced documents	8
	5.4	Test matrix	8
	5.5	Tabulation	9
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.6.1	Interrelationship of Codes	11
	5.6.2	Automatic MSE Data	11
	5.6.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Test matrix	9
	III.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	92
	B.	Characteristic Code Index	106
		Index	110

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Springs.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-29, Springs, Mechanical; Drawing Requirements For be reviewed prior to using this dash-numbered part book. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SPRING	162012	MIL-S-6715	AIRCRAFT
SPRING, BELLEVILLE	162010	MS75044	TENSION
SPRING, COMPRESSION, HELICAL	162001	MIL-S-6715	AIRCRAFT
		MIL-S-13572	HELICAL EXT
		MS24585	HELICAL
		MS24586	HELICAL, EXT
		MS13806	BRUSH, GEN
		MS39134	MECH, AUTO
		MS51014	SPPL CA TERM
		MS51015	RETAINER, ELEC
SPRING, COMPRESSION, STRANDED WIRE	162002	MIL-S-6715	STRANDED WIRE
		MIL-S-13572	HELICAL EXT
SPRING, CONSTANT FORCE	162003	MIL-S-6715	
		MIL-S-13572	HELICAL, CPRSN AND EXT
SPRING, ESCAPEMENT	162011	MIL-S-20561	CORROSION RES
SPRING, EXTENSION, HELICAL	162004	MIL-S-6715	HELICAL
		MIL-S-13572	HELICAL CPRSN
		MS24586	HELICAL
		MS90296	BAND, PARACHUTE CONTAINER
SPRING, FLAT	162005	MIL-S-6715	
		MIL-S-13572	HELICAL, CPRSN AND EXT
SPRING, GARTER	162006	MIL-S-6715	
		MIL-S-13572	HELICAL, CPRSN AND EXT

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SPRING, TORSION, HELICAL	162007	MIL-S-6715 MIL-S-82684	AIRCRAFT TORSION
SPRING, TORSION, SPIRAL	162008	MIL-S-6715 MIL-S-13572	HELICAL, CPRSN AND EXT
SPRING, VOLUTE	162009	MIL-S-6715 MIL-S-13572	HELICAL, CPRSN AND EXT

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-P-416	Plating, Cadmium (Electrodeposited)
QQ-Z-325	Zinc Coating, Electrodeposited Requirements For

MILITARY

MIL-S-116	Preservation-packaging, Methods of
MIL-S-6715	Springs: Helical, Aircraft
MIL-S-6866	Inspection, Penetrant Method of
MIL-I-6868	Inspection Process, Magnetic Particle
MIL-H-6875	Heat Treatment of Steels (Aircraft Practice), Process For
MIL-S-13572	Springs, Helical, Compression and Extension
DOD-P-16232	Phosphate Coating, Heavy, Manganese or Zinc Base (For Ferrous Metals)
MIL-S-20561	Spring, Escapement, Corrosion-resisting

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation Systems
MIL-STD-130	Identification Marking of U.S. Property
MIL-STD-186	Protective Finishing Systems for Rockets, Guided Missiles, Support Equipment and Related Materials

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	Decarburization 2237	Bending 2143	Embrittlement Relief 2443	Spring Rate 3243	Surface Defects 3443	Deflection 2343	Solid Height 3143
QQ-P-416		X			X			
QQ-Z-325				X				
MIL-S-6715			X				X	
MIL-I-6866						X		
MIL-I-6868						X		
MIL-S-13572		X			X		X	X
DOD-P-16232				X				
MIL-S-20561			X					

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for spring characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1756	NO OF FREE COILS, MIN	1758	NO OF FREE COILS, MAX	1934	PITCH PER INCH
1936	PITCH PER MILLIMETER	1926	MANDREL DIA INCHES	1928	MANDREL DIA MILLIMETER
1808	SHAFT DIA INCHES	1810	SHAFT DIA MILLIMETER	1720	SPRING TYPE
1882	MIN SPRING RATE POUND/INCH	1884	MIN SPRING RATE GRAM/ MILLIMETER	1886	MAX SPRING RATE POUND/INCH
1888	MAX SPRING RATE GRAM/ MILLIMETER	2331	DEFLECTION MAX INCHES	2333	DEFLECTION MAXIMUM MILLIMETER
3625	FREE LENGTH INCHES	3627	FREE LENGTH MILLIMETER	3131	MAX SOLID HEIGHT MILLIMETER
3129	MAX SOLID HEIGHT INCHES				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1920	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE ROUND.
1930	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE SQUARE.
1922	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE FLAT.
1924	STOCK SHAPE. THE SPRING STOCK SHAPE SHALL BE 1924.
1926	MANDREL DIAMETER. THE SPRING MANDREL DIAMETER SHALL BE 1926 INCH(S).
1928	MANDREL DIAMETER. THE SPRING MANDREL DIAMETER SHALL BE 1928 MILLIMETERS.
1934	PITCH. THE PITCH OF THE SPRING SHALL BE 1934 COILS PER INCH.
1936	PITCH. THE PITCH OF THE SPRING SHALL BE 1936 COILS PER MILLIMETER.
	END ORIENTATION.
1746	THE POSITION OF SPRING END NUMBER 1 RELATIVE TO THE SPRING AXIS SHALL BE NOT LESS THAN 1746 DEGREES.
1748	THE POSITION OF SPRING END NUMBER 2 RELATIVE TO THE SPRING AXIS SHALL BE NOT LESS THAN 1748 DEGREES.

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONCENTRICITY	
MAXIMUM DEVIATION (SELECT ONE)	
(INCH)	1752
(MILLIMETERS)	1754
NUMBER OF FREE COILS	
MINIMUM (QUANTITY)	1756
MAXIMUM (QUANTITY)	1758
DIRECTION OF HELIX (SELECT ONE)	
RIGHT HAND.	1661
LEFT HAND.	1663
OPTIONAL	1764
STRANDED WIRE	
NUMBER OF STRANDS (QUANTITY)	1766
STRAND DIAMETER (SELECT ONE)	
(INCH)	1768
(MILLIMETERS)	1780

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1752 CONCENTRICITY. THE DEVIATION FROM CONCENTRICITY OF COILS WITH THE SPRING CENTER SHALL BE NOT GREATER THAN 1752 INCH.

1754 CONCENTRICITY. THE DEVIATION FROM CONCENTRICITY OF COILS WITH THE SPRING CENTER SHALL BE NOT GREATER THAN 1754 MILLIMETERS.

NUMBER OF FREE COILS.

1756 THE NUMBER OF FREE COILS SHALL BE NOT LESS THAN 1756.

1758 THE NUMBER OF FREE COILS SHALL BE NOT GREATER THAN 1758.

1661 DIRECTION OF HELIX. THE DIRECTION OF THE SPRING HELIX SHALL BE RIGHT HAND.

1663 DIRECTION OF HELIX. THE DIRECTION OF THE SPRING HELIX SHALL BE LEFT HAND.

1764 DIRECTION OF HELIX. THE DIRECTION OF THE SPRING HELIX SHALL BE OPTIONAL.

STRANDED WIRE.

1766 THE NUMBER OF STRANDS SHALL BE 1766.

1768 THE DIAMETER OF THE WIRE STRANDS SHALL BE 1768 INCH.

1780 THE DIAMETER OF THE WIRE STRANDS SHALL BE 1780 MILLIMETERS.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DIRECTION OF STRAND HELIX (SELECT ONE)	
RIGHT HAND.	1782
LEFT HAND.	1784
OPTIONAL.	1786
PITCH OF STRAND HELIX	
MINIMUM (SELECT ONE)	
(INCHES)	1788
(MILLIMETERS)	1790
MAXIMUM (SELECT ONE)	
(INCHES)	1792
(MILLIMETERS)	1794
WIRE END CLOSURE (SELECT ONE)	
BRAZED.	1796
FUZED.	1797
ROUNDED.	1798

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1864 SPRING BEARING SURFACE ROUGHNESS. THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SPRING BEARING SURFACES SHALL BE NOT GREATER THAN 1864 MICROINCHES.

1866 SPRING BEARING SURFACE ROUGHNESS. THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SPRING BEARING SURFACES SHALL BE NOT GREATER THAN 1866 MICROMETERS.

1868 SPRING BEARING SURFACE WAVINESS. THE SPRING BEARING SURFACE WAVINESS SHALL BE NOT GREATER THAN 1868 INCH.

1870 SPRING BEARING SURFACE WAVINESS. THE SPRING BEARING SURFACE WAVINESS SHALL BE NOT GREATER THAN 1870 MILLIMETERS.

1872 FATIGUE LIFE. THE FATIGUE LIFE OF THE SPRING SHALL BE NOT LESS THAN 1872 CYCLES.

1874 BAND LENGTH. THE BAND LENGTH OF THE SPRING SHALL BE 1874 INCHES.

1876 BAND LENGTH. THE BAND LENGTH OF THE SPRING SHALL BE 1876 MILLIMETERS.

1878 DRUM DIAMETER. THE DRUM DIAMETER OVER WHICH THE SPRING SHALL OPERATE SHALL BE 1878 INCH(S).

1880 DRUM DIAMETER. THE DRUM DIAMETER OVER WHICH THE SPRING SHALL OPERATE SHALL BE 1880 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SPRING RATE	
AS FOLLOWS:	1862
MINIMUM (SELECT ONE)	
(POUNDS PER INCH)	1882
(GRAMS PER METER)	1884
(KILOGRAMS PER MILLIMETER)	1883
MAXIMUM (SELECT ONE)	
(POUNDS PER INCH)	1886
(GRAMS PER METER)	1888
(KILOGRAMS PER MILLIMETER)	1889
NOMINAL (SELECT ONE)	
(POUNDS PER INCH)	1900
(GRAMS PER METER)	1902
(KILOGRAMS PER MILLIMETER)	1904

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1862	SPRING RATE. THE SPRING RATE SHALL BE AS FOLLOWS:
1882	THE SPRING RATE SHALL BE NOT LESS THAN 1882 POUNDS PER INCH.
1884	THE SPRING RATE SHALL BE NOT LESS THAN 1884 GRAMS PER METER.
1883	THE SPRING RATE SHALL BE NOT LESS THAN 1883 KILOGRAMS PER MILLIMETER.
1886	THE SPRING RATE SHALL BE NOT GREATER THAN 1886 POUNDS PER INCH.
1888	THE SPRING RATE SHALL BE NOT GREATER THAN 1888 GRAMS PER METER.
1889	THE SPRING RATE SHALL BE NOT GREATER THAN 1889 KILOGRAMS PER MILLIMETER.
1900	THE SPRING RATE SHALL BE 1900 POUNDS PER INCH.
1902	THE SPRING RATE SHALL BE 1902 GRAMS PER METER.
1904	THE SPRING RATE SHALL BE 1904 KILOGRAMS PER MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 20264.0-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
HEAT TREATMENT	
AS FOLLOWS:	1890
PER MIL-H-6875.	1892
PER MIL-H-7199.	1894
PER MIL-H-81200.	1896
OTHER ____.	1898
CLEANLINESS	
AS FOLLOWS: (SELECT ONE)	1932
PER MIL-STD-186.	1906
PER MIL-P-116.	1908
PER MIL-STD-1246.	1910
OTHER____.	1912
TENSILE STRENGTH, FINISHED SPRING	
MINIMUM (SELECT ONE)	
(KSI)	1914
(MPA)	1916

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1890 HEAT TREATMENT. HEAT TREATMENT OF THE SPRING SHALL BE AS FOLLOWS:

1892 HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH MIL-H-6875.

1894 HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH MIL-H-7199.

1896 HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH MIL-H-81200.

1898 HEAT TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH 1898.

1932 CLEANLINESS. CLEANLINESS OF THE SPRING SHALL BE AS FOLLOWS:

1906 CLEANLINESS SHALL BE IN ACCORDANCE WITH MIL-STD-186.

1908 CLEANLINESS SHALL BE IN ACCORDANCE WITH MIL-P-116.

1910 CLEANLINESS SHALL BE IN ACCORDANCE WITH MIL-STD-1246.

1912 CLEANLINESS SHALL BE IN ACCORDANCE WITH 1912.

TENSILE STRENGTH, FINISHED SPRING.

1914 TENSILE STRENGTH OF THE SPRING SHALL BE NOT LESS THAN 1914 THOUSAND POUNDS PER SQUARE INCH.

1916 TENSILE STRENGTH OF THE SPRING SHALL BE NOT LESS THAN 1916 MEGAPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TENSILE STRENGTH, FINISHED SPRING (CONT)	
MAXIMUM (SELECT ONE)	
(KSI)	1918
(MPA)	1919
WEIGHT	
MINIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6943
(POUNDS)	6944

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1918	TENSILE STRENGTH OF THE SPRING SHALL BE NOT GREATER THAN 1918 THOUSAND POUNDS PER SQUARE INCH.
1919	TENSILE STRENGTH OF THE SPRING SHALL BE NOT GREATER THAN 1919 MEGAPASCALS.
6943	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).
6944	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MINIMUM WEIGHT/MASS PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	6945
(KILOGRAMS)	6946
MINIMUM WEIGHT/MASS PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7031
(POUNDS)	7032
SI (SELECT ONE)	
(GRAMS)	7033
(KILOGRAMS)	7034
BENDING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2121
NO CRACKS OR FRACTURES.	2125

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6945	MINIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).
6946	MINIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).
7031	MINIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT LESS THAN 7031 OUNCE(S).
7032	MINIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT LESS THAN 7032 POUND(S).
7033	MINIMUM MASS PER 100. THE MASS PER 100 UNITS SHALL BE NOT LESS THAN 7033 GRAM(S).
7034	MINIMUM MASS PER 100. THE MASS PER 100 UNITS SHALL BE NOT LESS THAN 7034 KILOGRAM(S).
2121	BENDING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2121.
2125	BENDING. THERE SHALL BE NO CRACKS OR FRACTURES AS A RESULT OF THE BEND TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BENDING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2141
PER DOCUMENT (DOC DES)	2143
AS FOLLOWS:	2145
BEND ANGLE OF FINISHED SPRING WIRE (DEGREES)	2147
ROD DIAMETER (SELECT ONE)	
(INCHES)	2149
(MILLIMETERS)	2151
DECARBURIZATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2221
AS FOLLOWS:	2223
NO DECARBURIZATION	2225
MAXIMUM TOTAL DECARBURIZATION (SELECT ONE)	
(INCH)	2227
(MILLIMETERS)	2229

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2329	THE DEFLECTION FROM THE FREE POSITION WITHOUT PERMANENT SET SHALL BE NOT GREATER THAN 2329 DEGREES.
2331	THE DEFLECTION FROM THE FREE POSITION TO SOLID HEIGHT SHALL BE NOT GREATER THAN 2329 INCH(S).
2333	THE DEFLECTION FROM THE FREE POSITION TO SOLID HEIGHT SHALL BE NOT GREATER THAN 2333 MILLIMETERS.
2341	DEFLECTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2341.
2343	DEFLECTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2343.
2421	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2421.
2423	EMBRITTLEMENT RELIEF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2425	NO EMBRITTLEMENT FROM PLATING PROCESS.
2427	EMBRITTLEMENT SHALL BE MINIMIZED.
2429	EMBRITTLEMENT RELIEF TREATMENT SHALL BE PERFORMED IN ACCORDANCE WITH THE PLATING OR COATING SPECIFICATION.

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EMBRITTLEMENT RELIEF (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2441
PER DOCUMENT (DOC DES)	2443
AS FOLLOWS:	2445
BAKE TIME (HOURS)	2447
TOLERANCE (MINUTES)	2449
TEMPERATURE (DEGREES CELSIUS)	2451
TOLERANCE (DEGREES CELSIUS)	2453
TIME PERMITTED BETWEEN PLATING AND BAKING (MINUTES)	2455
FATIGUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2521
AS FOLLOWS:	2523
NO CRACKS OR BREAKS.	2525
MAXIMUM PERMANENT SET (SELECT ONE)	
(INCHES)	2527
(MILLIMETERS)	2529
(DEGREES)	2531

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR. CODE	STANDARD PARAGRAPH
2441	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2441.
2443	EMBRITTLEMENT RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2443.
2445	EMBRITTLEMENT RELIEF. TESTING SHALL BE AS FOLLOWS:
2447	BAKE TIME SHALL BE 2447 HOURS.
2449	TIME TOLERANCE SHALL BE 2449 MINUTES.
2451	BAKE TEMPERATURE SHALL BE 2451 DEGREES CELSIUS.
2453	TEMPERATURE TOLERANCE SHALL BE 2453 DEGREES CELSIUS.
2455	THE TIME BETWEEN PLATING AND BAKING SHALL BE 2455 MINUTES.
2521	FATIGUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2521.
2523	FATIGUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2525	THERE SHALL BE NO CRACKS OR BREAKS INDICATING FATIGUE.
2527	PERMANENT SET SHALL BE NOT GREATER THAN 2527 INCH(S).
2529	PERMANENT SET SHALL BE NOT GREATER THAN 2529 MILLIMETERS.
2531	PERMANENT SET SHALL BE NOT GREATER THAN 2531 DEGREES.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FATIGUE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2541
AS FOLLOWS:	2543
ALTERNATE DEFLECTION FROM INITIAL TO FINAL OPERATING POSITION (CYCLES)	2545
TEST TEMPERATURE (DEGREES CELSIUS)	2547
INSPECTION INTERVALS (CYCLES INTERVALS)	2549
INSPECTION METHOD (SELECT ONE)	
VISUAL.	2551
PER MIL-STD-271.	2553
FREE LENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3621
AS FOLLOWS:	3623
LENGTH AFTER APPLICATION AND RELEASE OF MAXIMUM WORKING LOAD (SELECT ONE)	
(INCHES)	3625
(MILLIMETERS)	3627

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2541	FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2541.
2543	FATIGUE. TESTING SHALL BE PERFORMED AS FOLLOWS:
2545	DEFLECTIONS FROM INITIAL TO FINAL OPERATING POSITION SHALL BE 2545 CYCLES.
2547	THE TEST TEMPERATURE SHALL BE 2547 DEGREES CELSIUS.
2549	INSPECTION SHALL BE PERFORMED AT 2549 CYCLE INTERVALS.
2551	THE INSPECTION METHOD SHALL BE VISUAL.
2553	THE INSPECTION METHOD SHALL BE IN ACCORDANCE WITH MIL-STD-271.
3621	FREE LENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3621.
3623	FREE LENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3625	THE SPRING FREE LENGTH SHALL BE 3625 INCH(S).
3627	THE SPRING FREE LENGTH SHALL BE 3627 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREE LENGTH (CONT)	
REQUIREMENTS (CONT)	
NUMBER OF LOADINGS BEFORE MEASUREMENT (QUANTITY)	3629
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3641
PER MIL-S-6715.	3645
AS FOLLOWS:	3643
MAXIMUM WORKING LOAD ____.	3649
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2823	LOAD, FINAL OPERATING. THE FINAL OPERATING LOAD SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2841	LOAD, FINAL OPERATING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2841.
2843	LOAD, FINAL OPERATING. TESTING SHALL BE PERFORMED AS FOLLOWS:
2845	THE DEFLECTION OF THE SPRING TO FINAL OPERATING POSITION SHALL BE 2845 INCH(S).
2847	THE DEFLECTION OF THE SPRING TO FINAL OPERATING POSITION SHALL BE 2847 MILLIMETERS.
2849	THE DEFLECTION OF THE SPRING TO FINAL OPERATING POSITION SHALL BE 2849 DEGREES.
2851	THE SPRING LOAD SHALL BE NOT LESS THAN 2851 POUND-INCHES.
2853	THE SPRING LOAD SHALL BE NOT LESS THAN 2853 OUNCES.
2855	THE SPRING LOAD SHALL BE NOT LESS THAN 2855 POUNDS.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD, FINAL OPERATING (CONT)	
MINIMUM LOAD (CONT)	
SI (SELECT ONE)	
(NEWTON METERS)	2857
(GRAMS)	2859
(NEWTONS)	2861
MAXIMUM LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2863
(OUNCES)	2865
(POUNDS)	2867
SI (SELECT ONE)	
(NEWTON METERS)	2869
(GRAMS)	2871
(NEWTONS)	2873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3053	THE TEST DEFLECTION SHALL BE NOT LESS THAN 3053 INCH(S).
3055	THE TEST DEFLECTION SHALL BE NOT LESS THAN 3055 MILLIMETERS.
3057	THE TEST DEFLECTION SHALL BE NOT LESS THAN 3057 DEGREES.
3059	THE TEST TEMPERATURE SHALL BE NOT LESS THAN 3059 DEGREES CELSIUS.
3061	THE NUMBER OF TEST CYCLES SHALL BE 3061.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLID HEIGHT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3121
AS FOLLOWS:	3123
MINIMUM (SELECT ONE)	
(INCHES)	3125
(MILLIMETERS)	3127
MAXIMUM (SELECT ONE)	
(INCHES)	3129
(MILLIMETERS)	3131
NOMINAL (SELECT ONE)	
(INCHES)	3130
(MILLIMETERS)	3132
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3141
PER DOCUMENT (DOC DES)	3143
AS FOLLOWS:	3145
MAXIMUM TEST LOAD (SELECT ONE)	
(POUNDS)	3147
(KILOGRAMS)	3149

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3121 SOLID HEIGHT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3121.

3123 SOLID HEIGHT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3125 THE SOLID HEIGHT SHALL BE NOT LESS THAN 3125 INCH(S).

3127 THE SOLID HEIGHT SHALL BE NOT LESS THAN 3127 MILLIMETERS.

3129 THE SOLID HEIGHT SHALL BE NOT GREATER THAN 3129 INCH(S).

3131 THE SOLID HEIGHT SHALL BE NOT GREATER THAN 3131 MILLIMETERS.

3130 THE SOLID HEIGHT SHALL BE 3130 INCH(S).

3132 THE SOLID HEIGHT SHALL BE 3132 MILLIMETERS.

3141 SOLID HEIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3141.

3143 SOLID HEIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3143.

3145 SOLID HEIGHT. TESTING SHALL BE PERFORMED AS FOLLOWS:

3147 THE TEST LOAD SHALL BE NOT GREATER THAN 3147 POUNDS.

3149 THE TEST LOAD SHALL BE NOT GREATER THAN 3149 KILOGRAMS.

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLID HEIGHT (CONT)	
AS FOLLOWS (CONT)	
MINIMUM SOLID HEIGHT (SELECT ONE)	
(INCHES)	1705
(MILLIMETERS)	3151
MAXIMUM SOLID HEIGHT (SELECT ONE)	
(INCHES)	1707
(MILLIMETERS)	3153
SPRING RATE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3221
REMAIN WITHIN SPECIFIED TOLERANCE.	3223
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3241
PER DOCUMENT (DOC DES)	3243

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.


CHAR CODE	STANDARD PARAGRAPH
3545	WORKING STRESS. TESTING SHALL BE PERFORMED AS FOLLOWS:
3547	WORKING STRESS SHALL BE NOT GREATER THAN 3547 THOUSAND POUNDS PER SQUARE INCH.
3549	WORKING STRESS SHALL BE NOT GREATER THAN 3549 MEGAPASCALS.
3551	DEFLECTION SHALL BE NOT GREATER THAN 3551 INCH(S).
3553	DEFLECTION SHALL BE NOT GREATER THAN 3553 MILLIMETERS.
3555	DEFLECTION SHALL BE NOT GREATER THAN 3555 DEGREES.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	


Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

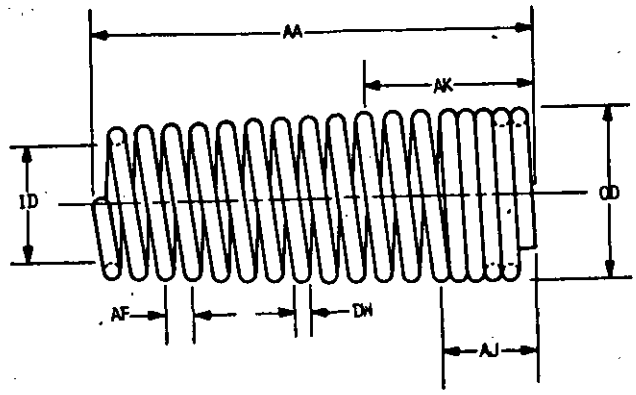

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-6

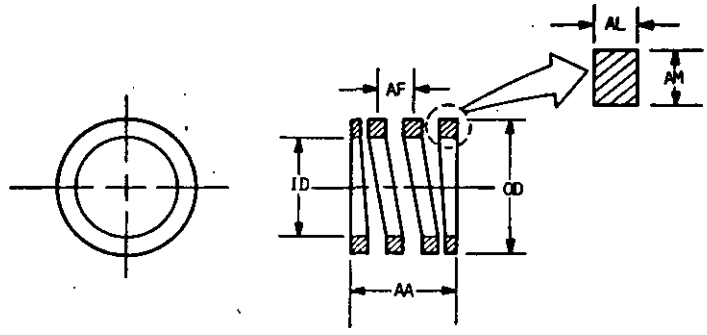


NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.


2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-01-7

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 202640-23T20:55Z
Check the source to verify that this is the current version before use.

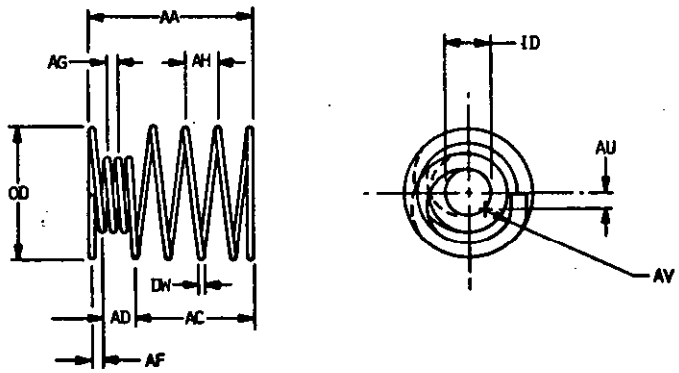


162-01-8

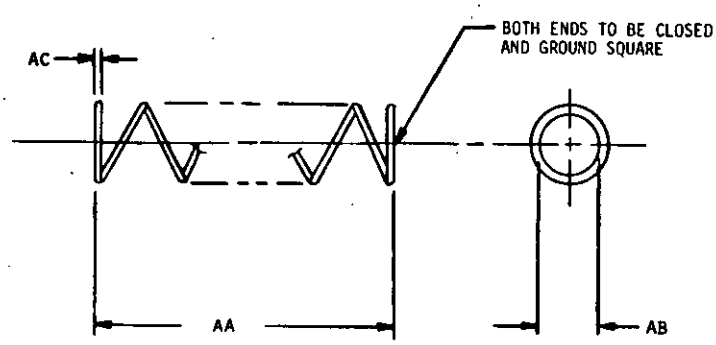


162-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

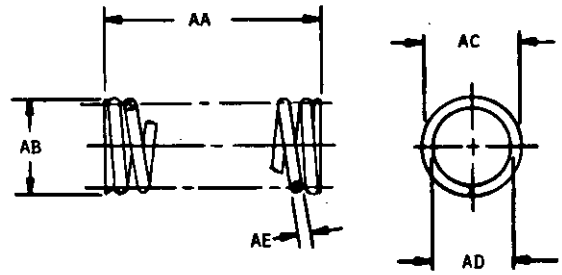


162-01-10



162-01-11

New page.

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:55Z
Check the source to verify that this is the currentversion before use.

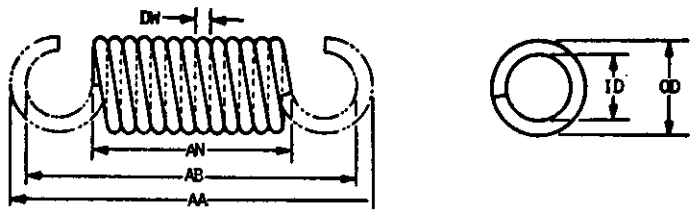

NOTES: 1. SEE END STYLE FIGURE FOR END CONFIGURATIONS.

2. RIGHT HAND HELIX SHOWN, SEE SECTION 3 OF SPECIFICATION FOR REQUIRED DIRECTION OF HELIX.

162-02-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1748	24	1834	34	1916	40
0102	12	1752	26	1835	64	1918	41A
0103	12	1754	26	1836	34	1919	41A
0104	12	1756	26	1838	34	1920	24
0105	12	1758	26	1839	34	1922	24
0107	14	1760	30	1840	34	1924	24
0108	14	1762	32	1842	34	1926	24
0700	12	1764	26	1844	34	1928	24
0800	12	1766	26	1850	34	1930	24
1003	12	1768	26	1862	38	1932	40
1004	12	1780	26	1864	36	1934	24
1005	12	1782	28	1866	36	1936	24
1006	12	1784	28	1868	36	2121	42
1008	12	1786	28	1870	36	2125	42
1009	16	1788	28	1872	36	2141	44
1554	58	1790	28	1874	36	2143	44
1613	22	1792	28	1876	36	2145	44
1661	26	1794	28	1878	36	2147	44
1663	26	1796	28	1880	36	2149	44
1702	20	1797	28	1882	38	2151	44
1704	20	1798	28	1883	38	2221	44
1705	80	1800	30	1884	38	2223	44
1706	20	1802	30	1886	38	2225	44
1707	80	1804	30	1888	38	2227	44
1708	20	1806	30	1889	38	2229	44
1710	20	1808	30	1890	40	2231	46
1712	20	1810	30	1891	82	2233	46
1714	20	1812	32	1892	40	2235	46
1716	20	1814	32	1893	82	2237	46
1720	16	1816	32	1894	40	2290	46
1722	16	1818	32	1896	40	2311	46
1724	16	1820	32	1898	40	2323	46
1726	16	1822	32	1900	38	2325	46
1730	22	1824	32	1902	38	2327	46
1732	22	1826	32	1904	38	2329	48
1735	22	1828	34	1906	40	2331	48
1740	22	1830	34	1908	40	2333	48
1742	22	1831	64	1910	40	2341	48
1744	22	1832	34	1912	40	2343	48
1746	24	1833	62	1914	40	2421	48

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2423	48	2725	62	2949	70	3147	78
2425	48	2741	62	2951	70	3149	78
2427	48	2745	62	2953	70	3151	80
2429	48	2747	62	2955	70	3153	80
2441	50	2749	62	2957	72	3221	80
2443	50	2751	62	2959	72	3223	80
2445	50	2753	62	2961	72	3241	80
2447	50	2755	62	2963	72	3243	80
2449	50	2757	64	2965	72	3245	82
2451	50	2759	64	2967	72	3247	82
2453	50	2761	64	2969	72	3249	82
2455	50	2763	64	2971	72	3251	82
2521	50	2765	64	2973	72	3253	82
2523	50	2767	64	3021	72	3255	82
2525	50	2769	64	3023	74	3257	82
2527	50	2821	64	3025	74	3321	84
2529	50	2823	66	3027	74	3323	84
2531	50	2841	66	3029	74	3341	84
2541	52	2843	66	3041	74	3343	84
2543	52	2845	66	3043	74	3345	84
2545	52	2847	66	3045	74	3347	84
2547	52	2849	66	3047	74	3349	84
2549	52	2851	66	3049	74	3421	84
2551	52	2853	66	3051	74	3423	84
2553	52	2855	66	3053	76	3441	86
2621	58	2857	68	3055	76	3443	86
2623	58	2859	68	3057	76	3521	86
2641	58	2861	68	3059	76	3541	86
2643	58	2863	68	3061	76	3543	86
2645	60	2865	68	3121	78	3545	88
2647	60	2867	68	3123	78	3547	88
2649	60	2869	68	3125	78	3549	88
2651	60	2871	68	3127	78	3551	88
2653	60	2873	68	3129	78	3553	88
2655	60	2921	70	3130	78	3555	88
2657	60	2923	70	3131	78	3621	52
2659	60	2941	70	3132	78	3623	52
2661	60	2943	70	3141	78	3625	52
2721	62	2945	70	3143	78	3627	52
2723	62	2947	70	3145	78	3629	54

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:55Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3641	54	5068	16				
3643	54	6334	56				
3645	54	6335	56				
3649	54	6336	56				
4100	87	6337	56				
4101	87	6369	12				
4102	87	6372	90				
4103	87	6870	88				
4104	87	6873	12				
4105	87	6874	14				
4106	87	6941	14				
4107	87	6942	14				
4108	87	6943	41A				
4109	87	6944	41A				
4110	87	6945	42				
4112	87	6946	42				
4114	87	6991	90				
4116	87	6992	90				
4118	87	6993	90				
4716	56	6994	90				
4764	56	6995	90				
4767	56	7001	88				
4775	76	7002	88				
4777	56	7003	88				
4778	56	7004	88				
4779	76	7005	88				
4780	76	7031	42				
4783	76	7032	42				
4786	76	7033	42				
4788	54	7034	42				
4798	54	7572	16				
4799	54	7573	16				
4800	56	7577	18				
4871	56	7578	18				
4905	16	7629	90				
4916	58						
4950	18						
4998	76						
4999	76						
5054	16						

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:55Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	90
Additional Requirements	88
Aperture Cards Required	14
Applicable Documents	90
Band Length	36
Base Document	12
Bearing Surface	22
Bending	42
Bore Diameter	32
City, State, Zip	12
Class	16
Classification	16
Cleanliness	40
Company Name/Command	12
Concentricity	26
Configuration	16
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Date	12
Decarburization	44
Deflection	46
Design and Construction	20
Direction of Helix	26
Direction of Strand Helix	28
Drum Diameter	36
Embrittlement Relief	48
End Orientation	24
End Squareness	22
Fatigue	50
Fatigue Life	36
Final Operating Position	34
Finishes	18
Format	12
Free Length	52
Government Design Activity FSCM	12
Grade	16
Ground Ends	22

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:55Z
Check the source to verify that this is the current version before use.