DoD-STD-35-85A(MI)

1 December 1978

SUPERSEDING

MIL-STD-35-85(MI)

30 JANUARY 1975

MILITARY STANDARD

FANS AND IMPELLERS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Fans and Impellers
Automated Engineering
Document Preparation System

DOD-STD-35-85A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comnents (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-85A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Fans and Impellers.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Issues of documents	4
	2.2	Other publications	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced documents	8
	5.4	Test matrix	8
	5.5	Tabulation	9
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.6.1	Interrelationship of Codes	11
	5.6.2	Automatic MSE Data	11
	5.6.3	DOD-STD-35 Tables	11

TABLES

Tables	I.	Title Index	2
	II.	Test matrix	9
	III.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	120
	B.	Characteristic Code Index	142
		Index	149

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Fans and Impellers.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation) Keyword Code Index (KCI)
e. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BLOWER	316007	MIL-B-1947	SOOT, SHIPBOARD
		MIL-B-21399	RADIO RECEIVING SETS
		MIL-B-23071	MINIATURE
		MIL-B-23072	ANTIEXPOSURE SUIT
		MIL-B-26793	GASOLINE ENGINE DRIVEN
		MIL-B-46707	AIR FILTER, ENGINE
		MIL-B-62062	GENERATOR COOLING, 28 VDC
		MIL-B-81565	ANTIEXPOSURE SUIT
		MS17269	ANTIEXPOSURE SUIT
		MS22053	ANTIEXPOSURE SUIT
FAN, AXIAL	316008	MIL-F-47232	GENERAL SPECIFICATION
FAN, CENTRIFUGAL	316001	MIL-F-16716	INDUSTRIAL
		MIL-F-18350	DISCHARGE PRESSURE
		MIL-F-18523	FORCED AND INDUCED DRAFT
		MIL-F-19004	FIXED, PORTABLE VENTILATION
		MIL-F-52278	BASE MOUNTED, NONOVERLOADING
FAN, CIRCULATING	316006	W-F-95	RADIAL DISCHARGE
		W-F-97	NONOSCILLATING, COLUMN

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FAN, CIRCULATING	316006 (CONT)	W-F-101	DESK
		MIL-F-68	NONOSCILLATING BRACKET
		MIL-F-11511	REFRIGERATED SPACE
		MIL-F-4685L	GROUND SUPPORT EQUIPMENT
		MIL-F-52925	CEILING PROPELLER
		FED-STD-49	NONOSCILLATING COLUMN
		FED-STD-50	DESK
		FED-STD-65	RADIAL DISCHARGE
		MIL-B-3402	AIRCRAFT VENTILATION
		MIL-B-76119	EXPLOSION PROOF
FAN, TUBEAXIAL	316005	MIL-F-43320	MAINTENANCE TENT VENT
		MIL-F-47194	INVERTER EXCITED
FAN, VANEAXIAL	316004	MIL-F-28602	STEAM TURBINE DRIVEN
		MIL-F-L8953	AIR CONDITION VENTILATION
		MIL-F-51228	300 CFM, 400 CY 416 VOLT, 17 HP
		MIL-F-52608	COMMUNICATION COOLING
FAN, VENTILATING	316003	MIL-F-16081	PROPELLER
		MIL-F-16082	SPRAY BOOTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-901	Shock Tests, H.I. (High Impact); Shipboard Machinery, Equipment and Systems, Requirements
MIL-F-16081	Fans, Ventilating, Propeller
MIL-I-17214	Indicator, Permeability; Low-Mu (Go-No Go)

STANDARDS

FEDERAL

FED-STD-406	Plastics: Methods of Testing

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurements Of
MIL-STD-740	Airborne and Structureborne Noise Measurements and Acceptance Criteria of Shipboard Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Fans and Impellers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Fans and Impellers, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered-part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35) are applicable to Fans and Impellers.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Fans and Impellers.

4.3.2 Illustrations. Illustrations applicable to Fans and Impellers are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions), Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for Instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document 'appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all reference documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST CODE	Balance/Vibration 1904	Cold Start 1924	Endurance 1964	Overspeed 2114
W-F-95					X
W-F-97		X			X
W-F-101		X			X
MIL-F-68				X	
MIL-F-151				X	
MIL-F-18602				X	
MIL-F-18953		X			
MIL-F-19004		X			
MIL-F-23071			X	X	
MIL-F-46851				X	
MIL-F-52608		X			

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Fans and Impellers characteristics. When different units of measure within one system (U.S. or S1) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1562	OPERATING MEDIA	1563	FAN DRIVER INPUT WATTS	1578	FAN OUTPUT STANDARD CUBIC FEET PER MINUTE
1582	FAN OUTPUT CUBIC FEET PER MINUTE	1586	FAN OUTPUT CUBIC METERS PER MINUTE	1600	ELECTRIC MOTOR INPUT VOLTS AC
1606	ELECTRIC MOTOR INPUT VOLTS DC	1603	MOTOR FREQUENCY HERTZ	1612	MOTOR SPEED RPM
5060	OPERATING ALTITUDE FEET	5061	OPERATING ALTITUDE METERS		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index Identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of, characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, wi11 appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	O101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	1014
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1O06
*SYSTEM APPLICATION	1O08
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
0101	0101.	
0102	0102.	
0103	0103.	
0104	0104.	
0105	0105.	
1003	1003.	
1004	USER(S) FSCM(S)	1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL	1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.	
1008	SYSTEM APPLICATION	1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM	6369.
0700		
0800		
	SOURCE(S),	
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE "THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY" HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE-

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S,) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FAN PERFORMANCE RATING	
INPUT TO FAN DRIVER (SELECT ONE)	
(WATTS)	1563
(HORSEPOWER)	1564
FAN OUTPUT (SELECT ONE)	
THRUST (POUNDS)	1565
THRUST (NEWTONS)	1568
(POUNDS PER SQUARE INCH)	1566
(KILOPASCALS)	1567
THRUST OUTPUT TO POWER INPUT RATIO (SELECT ONE)	
(POUNDS PER WATT)	1570
(NEWTONS PER WATT)	1572
FAN MEDIA VELOCITY (SELECT ONE)	
(FEET PER SECOND)	1574
(METERS PER SECOND)	1575
OUTPUT FLOW (SELECT ONE)	
U.S. (SELECT ONE)	
(STANDARD CUBIC FEET PER MINUTE)	1578
STATIC PRESSURE (INCHES OF WATER)	1580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

FAN PERFORMANCE RATING.

1563 THE INPUT TO THE FAN DRIVER SHALL BE 1563 WATTS.

1564 THE INPUT TO THE FAN DRIVER SHALL BE 1564 HORSEPOWER.

1565 THE FAN OUTPUT SHALL BE 1565 POUNDS THRUST.

1568 THE FAN OUTPUT SHALL BE 1568 NEWTONS THRUST.

1566 THE FAN OUTPUT SHALL BE 1566 POUNDS PER SQUARE INCH.

1567 THE FAN OUTPUT SHALL BE 1567 KILOPASCALS.

1570 THE UNIT SHALL PROVIDE A THRUST OUTPUT TO POWER INPUT RATIO OF 1570 POUNDS PER WATT.

1572 THE UNIT SHALL PROVIDE A THRUST OUTPUT TO POWER INPUT RATIO OF 1572 NEWTONS PER WATT.

1574 THE OUTPUT MEDIA VELOCITY SHALL BE 1574 FEET PER SECOND.

1575 THE OUTPUT MEDIA VELOCITY SHALL BE 1575 METERS PER SECOND.

1578 THE UNIT SHALL PROVIDE AN OUTPUT FLOW OF 1578 STANDARD CUBIC FEET PER MINUTE.

1580 THE OUTPUT FLOW SHALL BE AT A STATIC PRESSURE OF 1580 INCHES OF WATER,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FAN PERFORMANCE RATING (CONT)	
U.S. (CONT)	
(CUBIC FEET PER MINUTE)	1582
STATIC PRESSURE (INCHES OF WATER)	1584
SI	
(CUBIC METERS PER MINUTE)	1586
STATIC PRESSURE (INCHES OF WATER)	1588
FAN RATING BASIS	
FAN OPERATING MEDIA (DESIGNATE)	1562
INLET MEDIA TEMPERATURE (DEGREES CELSIUS)	1590
BAROMETRIC PRESSURE (SELECT ONE)	
(INCHES OF MERCURY)	1592
(KILOPASCALS)	1594
MEDIA DENSITY (SELECT ONE)	
(POUNDS PER CUBIC FOOT)	1596
(KILOGRAMS PER CUBIC METER)	1598

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1582	THE UNIT SHALL PROVIDE AN OUTPUT FLOW OF 1582 CUBIC FEET PER MINUTE.
3584	THE OUTPUT FLOW SHALL BE AT A STATIC PRESSURE OF 1584 INCHES OF WATER.
1586	THE UNIT SHALL PROVIDE AN OUTPUT FLOW OF 1586 CUBIC METERS PER MINUTE.
1588	THE OUTPUT FLOW SHALL BE AT A STATIC PRESSURE OF 1588 INCHES OF WATER.
	FAN RATING BASIS.
1562	THE FAN SHALL BE CAPABLE OF OPERATING IN AN ENVIRONMENT CONSISTING OF 1562.
1590	THE FAN RATING BASIS SHALL BE BASED ON AN INLET MEDIA TEMPERATURE OF 1590 DEGREES CELSIUS.
1592	THE FAN RATING BASIS SHALL BE BASED ON A BAROMETRIC PRESSURE OF 1592 INCHES OF MERCURY,
1594	THE FAN RATING BASIS SHALL BE BASED ON A BAROMETRIC PRESSURE (OF 3594 KILOPASCALS.
1596	THE FAN RATING BASIS SHALL BE BASED ON A MEDIA DENSITY OF 1596 POUNDS PER CUBIC FOOT.
1598	THE FAN RATING BASIS SHALL BE BASED ON A MEDIA DENSITY OF 1598 KILOGRAMS PER CUBIC METER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FAN RATING BASIS (CONT)	
MOTOR LOCATION (SELECT ONE)	
SUCTION SIDE.	1587
DISCHARGE SIDE.	1589
S AND D FOLLOWING THE FLOW RATE DESIGNATES THE MOTOR LOCATION.	1591
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
YARDS.	7574

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1587	THE MOTOR SHALL BE LOCATED ON THE SUCTION SIDE OF THE FAN.
1589	THE MOTOR SHALL BE LOCATED ON THE DISCHARGE SIDE OF THE FAN.
1591	AN S FOLLOWING THE FLOW RATE IN THE PERFORMANCE CHARACTERISTICS TABLE SHALL DESIGNATE THE LOCATION OF THE MOTOR ON THE SUCTION SIDE OF THE FAN AND A D FOLLOWING THE FLOW RATE SHALL DESIGNATE THE LOCATION OF THE MOTOR ON THE DISCHARGE SIDE OF THE FAN.
	Configuration
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT).	
UNITS (CONT)	
SI (SELECT ONE)	
Centimeters	7576
Millimeters	7577
METERS.	7578
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED SHALL BE IN MILLIMETERS OR DEGREES,
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.
4950	ILLUSTRATION(S)- ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS Necessary)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE, (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ELECTRIC MOTOR FAN DRIVER	
INPUT VOLTAGE (VOLTS AC)	1600
VOLTAGE TOLERANCE (VOLTS AC)	1601
FREQUENCY (HERTZ)	1603
FREQUENCY TOLERANCE (HERTZ)	1604
INPUT VOLTAGE (VOLTS DC)	1606
VOLTAGE TOLERANCE (VOLTS DC)	1607
PHASE (SELECT ONE)	
SINGLE.	1609
THREE.	1610
SPEED (REVOLUTIONS PER MINUTE)	1612
MAXIMUM RUNNING CURRENT (AMPERES)	1614

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

ELECTRIC MOTOR FAN DRIVER.

1600 THE ELECTRIC MOTOR SHALL OPERATE AT 1600 VOLTS AC.

1601 THE AC VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1601 VOLTS AC.

1603 THE AC FREQUENCY SHALL BE 11603 HERTZ.

1604 THE FREQUENCY TOLERANCE SHALL BE PLUS OR MINUS 1604 HERTZ.

1606 THE ELECTRIC MOTOR SHALL OPERATE AT 3606 VOLTS DC.

1607 THE DC VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1607 VOLTS DC.

1609 THE ELECTRIC MOTOR SHALL BE A SINGLE PHASE. UNIT.

1610 THE ELECTRIC MOTOR SHALL BE A THREE PHASE UNIT.

1612 THE OPERATING SPEED OF THE ELECTRIC MOTOR SHALL BE 1612 REVOLUTIONS PER MINUTE.

1614 THE RUNNING CURRENT OF THE MOTOR SHALL BE NOT GREATER THAN 1614 AMPERES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ELECTRIC MOTOR FAN DRIVER (CONT)	
MAXIMUM LOCKED ROTOR CURRENT (AMPERES)	1616
DUTY CYCLE (SELECT ONE)	
Continuous	1618
INTERMITTENT*	1620
ENCLOSURE (SELECT ONE)	
OPEN.	3622
DRIP-PROOF,	1624
SPLASH-PROOF.	1626
GUARDED.	1628
DRIP-PROOF, FULLY GUARDED.	1630
TOTALLY ENCLOSED, FAN COOLED.	1634
WATERPROOF.	1636
EXPLOSION PROOF.	1638
DUST-IGNITION PROOF-	1640

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1616	THE LOCKED ROTOR CURRENT OF THE MOTOR SHALL BE NOT GREATER THAN 1616 AMPERES.
1618	THE DUTY CYCLE OF THE ELECTRIC MOTOR SHALL BE CONTINUOUS.
1620	THE DUTY CYCLE OF THE ELECTRIC MOTOR SHALL BE INTERMITTENT.
1622	THE ELECTRIC MOTOR ENCLOSURE SHALL BE OPEN.
1624	THE ELECTRIC MOTOR ENCLOSURE SHALL BE DRIP-PROOF.
1626	THE ELECTRIC MOTOR ENCLOSURE SHALL BE SPLASH-PROOF.
1628	THE ELECTRIC MOTOR ENCLOSURE SHALL BE GUARDED.
1630	THE ELECTRIC MOTOR ENCLOSURE SHALL BE DRIP-PROOF, FULLY GUARDED.
1634	THE ELECTRIC MOTOR ENCLOSURE SHALL BE TOTALLY ENCLOSED? FAN COOLED.
1636	THE ELECTRIC MOTOR ENCLOSURE SHALL BE WATERPROOF.
1638	THE ELECTRIC MOTOR ENCLOSURE SHALL BE EXPLOSION PROOFo
1640	THE ELECTRIC MOTOR ENCLOSURE SHALL BE DUST-IGNITION PROOF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ELECTRIC MOTOR FAN DRIVER (CONT)	
SPECIFICATION (DOC DES)	1650
TYPE _____	1652
CLASS _____	1654
STYLE _____	1656
STEAM TURBINE FAN DRIVER	
SPECIFICATION (DOC DES)	1660
CAPACITY (BRAKE HORSEPOWER)	1662
SPEED (REVOLUTIONS PER MINUTE)	3664
MAXIMUM STEAM RATE (POUNDS PER BRAKE HORSEPOWER HOUR)	1666
INLET STEAM TEMPERATURE (DEGREES CELSIUS)	1668
INLET STEAM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1670
(KILOPASCALS)	1672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1650	THE ELECTRIC MOTOR SHALL BE IN ACCORDANCE WITH 1650.
1652	THE ELECTRIC MOTOR TYPE SHALL BE 1652.
1654	THE ELECTRIC MOTOR CLASS SHALL BE 1654,
1656	THE ELECTRIC MOTOR STYLE SHALL BE 1656.
	STEAM TURBINE FAN DRIVER.
1660	THE STEAM TURBINE SHALL BE IN ACCORDANCE WITH 1660
1662	THE STEAM TURBINE CAPACITY SHALL BE 1662 BRAKE HORSEPOWER.
1664	THE STEAM TURBINE SPEED SHALL BE 1664 REVOLUTIONS PER MINUTE.
1666	THE MAXIMUM PERMISSIBLE STEAM RATE SHALL BE 1666 POUNDS PER BRAKE HORSEPOWER HOUR,
1668	THE INLET STEAM TEMPERATURE SHALL BE 1668 DEGREES CELSIUS.
1670	THE INLET STEAM PRESSURE SHALL BE 1670 POUNDS PER SQUARE INCH GAGES
1672	THE INLET STEAM PRESSURE SHALL BE 1672 KILOPASCALS-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
STEAM TURBINE FAN DRIVER (CONT)	
EXHAUST STEAM PRESSURE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1674
(INCHES OF MERCURY ABSOLUTE)	1676
SI	
(KILOPASCALS)	3678
INTERNAL COMBUSTION ENGINE FAN DRIVER	
SPECIFICATION (DOC DES)	1690
GROUP ____	1692
ACCESSORIES	
ELECTRICAL CORD	
SPECIFICATION (DOC DES)	1710
TYPE ____	1732
COLOR ____	1714

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1674 THE EXHAUST STEAM CONDITION (PRESSURE) SHALL BE 1674 POUNDS PER SQUARE INCH GAGE.

1676 THE EXHAUST STEAM CONDITION (PRESSURE) SHALL BE 1676 INCHES OF MERCURY ABSOLUTEo

1678 THE EXHAUST STEAM CONDITION (PRESSURE) SHALL BE 1678 KILOPASCALS.

INTERNAL COMBUSTION ENGINE FAN DRIVER.

1690 THE INTERNAL COMBUSTION ENGINE SHALL BE IN ACCORDANCE WITH 1690.

1692 THE INTERNAL COMBUSTION ENGINE SHALL BE IN GROUP 1692.

ACCESSORIES.

1710 THE ELECTRICAL CORD SHALL BE IN ACCORDANCE WITH 1710.

1712 THE ELECTRICAL CORD SHALL BE TYPE 1712.

1714 THE COLOR OF THE ELECTRICAL CORD SHALL BE 1714.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ELECTRICAL CORD (CONT)	
LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	1716
(FEET)	1718
SI	
(METERS)	1720
ELECTRICAL CONNECTOR	
SPECIFICATION (DOC DES)	1730
TYPE ____	1732
MATING PART (PART NUMBER)	1734
DRIVER CONTROLLER	
TYPE OF CONTROL (SELECT ONE)	
MANUAL.	1736
REMOTE, MAGNETIC.	1738
THERMAL.	1740

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1716	THE ELECTRICAL CORD LENGTH SHALL BE 1716 INCHES.
1718	THE ELECTRICAL CORD LENGTH SHALL BE 1718 FEET.
1720	THE ELECTRICAL CORD LENGTH SHALL BE 1720 METERS.
1730	THE ELECTRICAL CONNECTOR SHALL BE IN ACCORDANCE WITH 1730.
1732	THE ELECTRICAL CONNECTOR SHALL BE TYPE 1732.
1734	THE ELECTRICAL CONNECTOR SHALL MATE WITH 1734.
	DRIVER CONTROLLER.
1736	THE OPERATION OF THE ELECTRICAL CONTROLLER, SHALL BE MANUAL.
1738	THE OPERATION OF THE ELECTRICAL CONTROLLER SHALL BE REMOTE (MAGNETIC).
1740	THE OPERATION OF THE ELECTRICAL CONTROLLER SHALL BE THERMAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DRIVER CONTROLLER (CONT)	
TYPE OF CONTROL ENCLOSURE (SELECT ONE)	
DRIP-PROOF.	1750
SPRAYTIGHT.	1752
SUBMERSIBLE.	1754
EXPLOSION PROOF.	1756
WATERTIGHT.	1758
SWITCH POSITIONS (NUMBER)	1770
RHEOSTAT REQUIRED.	1772
LIFTING ATTACHMENT REQUIRED,	1774
FAN BEARING	
SPECIFICATION (DOC DES)	1780
PROVISIONS FOR COOLING.	1782
LUBRICANT (SPECIFY)	1786
SPECIFICATION (DOC DES)	1788
BLAST GATE REQUIRED.	1790
SCROLL CONFIGURATION	
FIGURE _____	1794
*STYLE _____	1796

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1750	THE ELECTRICAL ENCLOSURE SHALL BE DRIP-PROOF.
1752	THE ELECTRICAL ENCLOSURE SHALL BE SPRAYTIGHTS.
1754	THE ELECTRICAL ENCLOSURE SHALL BE SUBMERSIBLE.
1756	THE ELECTRICAL ENCLOSURE SHALL BE EXPLOSION PROOF.
1758	THE ELECTRICAL ENCLOSURE SHALL BE WATERTIGHT.
1770	THERE SHALL BE 1770 POSITIONS OF THE SWITCH.
1772	THE UNIT SHALL BE PROVIDED WITH A RHEOSTAT CONTROLLER.
1774	THE UNIT SHALL BE PROVIDED WITH LIFTING ATTACHMENT.
	FAN BEARING.
1780	THE UNIT BEARING(S) SHALL BE IN ACCORDANCE WITH 1780.
1782	THE UNIT BEARING(S) SHALL HAVE PROVISIONS FOR COOLING.
1786	THE BEARINGS SHALL BE LUBRICATED WITH 1786.
1788	THE BEARINGS SHALL BE LUBRICATED IN ACCORDANCE WITH 1788.
1790	THE UNIT SHALL BE PROVIDED WITH A BLAST GATE.
1794	THE SCROLL CONFIGURATION SHALL BE AS SHOWN IN FIGURE 1794,
1796	STYLE 1796.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
BLADE TYPE (SELECT ONE)	
FORWARD CURVED.	1800
RADIAL TIP.	1802
BACKWARD INCLINED.	1804
GENERAL CHARACTERISTICS	
ROTATIONAL DIRECTION VIEWED FROM DRIVE SIDE (SELECT ONE)	
CLOCKWISE.	1820
COUNTERCLOCKWISE.	1821
MINIMUM ANGLE OF OSCILLATION (DEGREES)	1822
MOUNTING (SELECT ONE)	
VERTICAL.	1824
HORIZONTAL.	1825
TYPE OF DRIVE (SELECT ONE)	
BELT.	1828
DIRECT.	1829
MAGNETIC PERMEABILITY (PER MIL-I-17214)	1850

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	BLADE TYPE.
1800	THE BLADE TYPE SHALL BE FORWARD CURVED.
1802	THE BLADE TYPE SHALL BE RADIAL (RADIAL TIP).
1804	THE BLADE TYPE SHALL BE BACKWARD INCLINED.
	GENERAL CHARACTERISTICS.
1820	THE ROTATIONAL DIRECTION OF THE UNIT, AS VIEWED FROM THE DRIVE SIDE, SHALL BE CLOCKWISE.
1821	THE ROTATIONAL DIRECTION OF THE UNIT, AS VIEWED FROM THE DRIVE SIDE, SHALL BE COUNTERCLOCKWISE.
1822	THE ANGLE OF OSCILLATION OF THE OSCILLATING FAN SHALL BE 1822 DEGREES, MINIMUM.
1824	THE UNIT SHALL BE CAPABLE OF VERTICAL MOUNTING.
1825	THE UNIT SHALL BE CAPABLE OF HORIZONTAL MOUNTING.
1828	THE FAN SHALL BE BELT DRIVEN.
1829	THE FAN SHALL BE DIRECTLY DRIVEN.
1850	THE PERMEABILITY OF THE MATERIAL USED IN THE COMPLETE ASSEMBLY SHALL NOT BE GREATER THAN 1850 WITH AIR EQUAL TO 1.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
GENERAL CHARACTERISTICS (CONT)	
AIR BARRIER BLOWER USAGE (SELECT ONE)	
INSECT CONTROL.	1810
TEMPERATURE CONTROL.	1812
DUAL PURPOSE.	1814
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
SAFETY	
ALL PARTS WHICH ARE ENERGIZED ELECTRICALLY SHALL BE INSULATED, FULLY ENCLOSED, OR GUARDED WHEN SUCH PARTS ARE EXPOSED TO CONTACT BY PERSONNEL OR OTHERWISE CREATE A HAZARD, ALL MOVING PARTS HAZARDOUS TO PERSONNEL SHALL BE ENCLOSED OR GUARDED.	1840

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1810 THE AIR BARRIER BLOWER SHALL BE USED FOR INSECT CONTROL.

1812 THE AIR BARRIER BLOWER SHALL BE USED FOR TEMPERATURE CONTROL.

1814 THE AIR BARRIER BLOWER SHALL BE USED FOR INSECT CONTROL AND TEMPERATURE CONTROL,

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNITo THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

70211 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

1840 SAFETY. ALL PARTS WHICH ARE ENERGIZED ELECTRICALLY SHALL BE INSULATED, FULLY ENCLOSED, OR GUARDED WHEN SUCH PARTS ARE EXPOSED TO CONTACT BY PERSONNEL OR OTHERWISE "CREATE A HAZARD. ALL MOVING PARTS HAZARDOUS TO PERSONNEL SHALL BE ENCLOSED OR GUARDED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORMANCE CHARACTERISTICS	
PERFORMANCE CHARACTERISTICS TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

PERFORMANCE CHARACTERISTICS.

PERFORMANCE CHARACTERISTICS. THE COMPONENT SHALL MEET THE REQUIREMENTS SPECIFIED IN THE PERFORMANCE CHARACTERISTICS TABLE.

PERFORMANCE CHARACTERISTICS TABLE

AIR FLOW (CFM)	FREQ (HZ)	STATIC PRESS (IN. OF H20)	WIND RISE HOTSPOT (DEG C)	INPUT POWER (w)	INPUT VOLT (V)	INPUT AMPS (A)	SPEED (RPM)	TEMP RISE DEG C	SCRN PRESS DROP (INo OF H20)
2550	2551	2552	2553	2554	2555	2556	2557	2558	2559
2560	2561	2562	2563	2564	2565	2566	2567	2568	2569
2570	2571	2572	2573	2574	2575	2576	2577	2578	2579
2580	2581	2582	2583	2584	2585	2586	2587	2588	2589
2590	2591	2592	2593	2594	2595	2596	2597	2598	2599
2600	2601	2602	2603	2604	2605	2606	2607	2608	2609
261J0	2611	2632	2613	2634	2615	2616	2617	2618	2619
2620	2621	2622	2623	2624	2625	2626	2627	2628	2629
2630	2631	2632	2633	2634	2635	2636	2637	2638	2639
2640	2641	2642	2643	2644	2645	2646	2647	2648	2649
2650	2651	2652	2653	2654	2655	2656	2657	2658	2659
2660	2661	2662	2663	2664	2665	2666	2667	2668	2669
2670	2671	2672	2673	2674	2675	2676	2677	2678	2679
2680	2681	2682	2683	2684	2685	2686	2687	2688	2689
2690	2691	2692	2693	2694	2695	2696	2697	2698	2699
2700	2701	2702	2703	2704	2705	2706	2707	2708	2709
2710	2711	2712	2713	2714	27115	2736	2717	2718	2719
2720	2721	2722	2723	2724	2725	2726	2727	2728	2729
2730	2733	2732	2733	2734	2735	2736	2737	2738	2739
2740	2741	2742	2743	2744	2745	2746	2747	2748	2749

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BALANCE/VIBRATIONS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1908
AS FOLLOWS:	1909
MAXIMUM VIBRATION AMPLITUDE (SELECT ONE)	
U.S.	
(INCHES)	1910
SI	
(MILLIMETERS)	1912
TEST METHODS (SELECT-ONE)	
PER "BASE DOCUMENT EXCEPT ____	1902
PER DOCUMENT (DOC DES)	1904
COLD START	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1908	BALANCE/VIBRATIONS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENTt EXCEPT 1908.
1909	BALANCE/VIBRATIONS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1910	THE VIBRATION AMPLITUDE SHALL BE NOT GREATER THAN 1910 INCH(S).
1912	THE VIBRATION AMPLITUDE SHALL BE NOT GREATER THAN 1912 MILLIMETER(S).
1902	BALANCE/VIBRATIONS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902
1904	BALANCE/VIBRATIONS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1904.
1930	COLD START. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1930.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLD START (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1931
MINIMUM SPEED (SELECT ONE)	
(PERCENT OF RATED SPEED)	1932
(REVOLUTIONS PER MINUTE)	1934
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
PER DOCUMENT (DOC DES)	1924
BLOWER SPEED SHALL BE MEASURED AFTER INITIAL EXCITATION (MINUTES)	1926
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1931	COLD START. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1932	THE SPEED SHALL BE NOT LESS THAN 1932 PERCENT OF THE RATED SPEED.
1934	THE SPEED SHALL BE NOT LESS THAN 1934 REVOLUTIONS PER MINUTE.
1922	COLD START. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 1922.
1924	COLD START. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1924.
1926	THE BLOWER SPEED SHALL BE MEASURED 1926 MINUTES AFTER INITIAL EXCITATION.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4805
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURES THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S),
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE*
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC6
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4863
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510
NO EVIDENCE OF DUST PENETRATION.	4801
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895
PER MIL-STD-810, METHOD 510.	4953
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBERS)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND 3 TEMPERATURE (DEGREES CELSIUS)	4840

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1950
PER MIL-STD-461.	1952
*EQUIPMENT CLASS	1954
SHORT DURATION INTERFERENCE MAY EXCEED LIMITS BY (DECIBELS)	1956
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1942
PER MIL-STD-462, METHOD(S)	1944
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1972
AS FOLLOWS:	1973
UNITS SHALL OPERATE SATISFACTORILY PER SPECIFIED REQUIREMENTS.	1974

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1950	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1950.
1952	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE AS SPECIFIED IN MIL-STD-461.
1954	THE EQUIPMENT CLASS SHALL BE 1954.
1956	SHORT DURATION INTERFERENCE MAY EXCEED LIMITS BY 1956 DECIBELS.
1942	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
1944	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462, METHOD(S) 1944.
1972	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1973	ENDURANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1974	THE UNIT(S) SHALL OPERATE SATISFACTORILY PER SPECIFIED REQUIREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1962
PER DOCUMENT (DOC DES)	1964
LENGTH OF TEST (HOURS)	1966
EXPLOSIVE ATMOSPHERE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1992
AS FOLLOWS:	1993
PER SPECIFIED REQUIREMENTS.	1994
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1982
PER MIL-STD-810, METHOD 511.	1984
PROCEDURE (NUMBER)	1985
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1986

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1962	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962.
1964	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1964.
1966	THE LENGTH OF TEST SHALL BE 1966 HOUR(S).
1992	EXPLOSIVE ATMOSPHERE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1992.
1993	EXPLOSIVE ATMOSPHERE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1994	THE UNIT(S) SHALL OPERATE SATISFACTORILY PER SPECIFIED REQUIREMENTS.
1982	EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982.
1984	EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 511.
1985	PROCEDURE NUMBER 1985 SHALL APPLY.
1986	THE CHAMBER TEMPERATURE SHALL BE 1986 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HOUSING WIND TEST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2036

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST IS PERFORMED. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47540
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE ~~4756~~ DAY(S).
2036	HOUSING WIND TEST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2036.~~

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HOUSING WIND TEST (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2037
NO DISTORTION OR DAMAGE,	2038
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
PER MIL-F-16081.	2024
MINIMUM WIND VELOCITY (SELECT ONE)	
U.S.	
(MILES PER HOUR)	2026
SI (SELECT ONE)	
(KILOMETERS PER HOUR)	2028
(METERS PER SECOND)	2030
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE,	4799
MAXIMUM TIME FOR ATTAINMENT OF RATED SPEED (SECONDS)	2050

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2037 HOUSING WIND TEST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2038 THERE SHALL BE NO DISTORTION OR DAMAGE.

2022 HOUSING WIND TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.

2024 HOUSING WIND TEST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-16081.

2026 THE WIND VELOCITY SHALL BE NOT LESS THAN 2026 MILES PER HOUR.

2028 THE WIND VELOCITY SHALL BE NOT LESS THAN 2028 KILOMETERS PER HOUR.

2030 THE WIND VELOCITY SHALL BE NOT LESS THAN 2030 METERS PER SECOND.

4798 HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

4799 HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

2050 THE TIME REQUIRED FOR ATTAINMENT OF RATED SPEED SHALL BE NOT GREATER THAN 2050 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST-METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4780
PER MIL-STD-810, METHOD 5070	4871
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III,	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V,	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD-	4764

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-810, METHOD 507. (CONT)	
OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLES (NUMBER)	4916
INSULATION RESISTANCE CYCLES (NUMBER)	4919
DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER)	4920
OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLES (NUMBER)	1554
INSULATION RESISTANCE CYCLES (NUMBER)	1555
DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER)	L556
TEST METHODS (SELECT ONE)	
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	"4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4916	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916.
49119	INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 4919, AT HIGH TEMPERATURE.
4920	DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 4920, AT HIGH TEMPERATURES
1554	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT LOW TEMPERATURE? DURING CYCLE(S) 1554.
1555	INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 1555, AT LOW TEMPERATURE.
1556	DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 1556, AT LOW TEMPERATURE,
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-202, METHOD 103. (CONT)	
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY,	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1380~~.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	3377
POINTS OF APPLICATION OF TEST VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1377 THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

1522 BETWEEN MUTUALLY INSULATED PARTS.

1523 BETWEEN ALL INSULATED PARTS AND GROUND.

1524 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

1520 SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.

1372 FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.

1381 SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.

1383 TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

1400 MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED,	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MEASUREMENTS BEFORE TEST	
OPERATING CURRENT (AMPERES)	2501
SPEED WITH LOAD (REVOLUTIONS PER MINUTE)	2507
SPEED WITHOUT LOAD (REVOLUTIONS PER MINUTE)	2505
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2503

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
	MEASUREMENTS BEFORE TEST-SHALL BE AS FOLLOWS.
2501	OPERATING CURRENT SHALL BE 2501 AMPERES.
2507	SPEED WITH LOAD SHALL BE 2507 REVOLUTIONS PER MINUTE.
2505	SPEED WITHOUT LOAD SHALL BE 2505 REVOLUTIONS PER MINUTE.
2503	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2503 MEGOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MEASUREMENTS AFTER DRYING	
OPERATING CURRENT (AMPERES)	2509
SPEED WITH LOAD (REVOLUTIONS PER MINUTE)	2515
SPEED WITHOUT LOAD (REVOLUTIONS PER MINUTE)	2533
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2511
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MEASUREMENTS AFTER DRYING SHALL BE AS FOLLOWS.
2509	OPERATING CURRENT SHALL BE 2509 AMPERES.
2515	SPEED WITH LOAD SHALL BE 2515 REVOLUTIONS PER MINUTE.
2513	SPEED WITHOUT LOAD SHALL BE 2513 REVOLUTIONS PER MINUTE.
2531	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2511 MEGOHM(S).
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY,	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2102
AS FOLLOWS:	2103
MAXIMUM NOISE LEVEL AT MAXIMUM SPEED (DECIBELS)	2104
MEET ACCEPTANCE CRITERIA OF MIL-STD-740.	3008
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2092
PER MIL-STD-740.	2094

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2102	NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2102,
2103	NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2104	THE NOISE LEVEL AT MAXIMUM SPEED SHALL BE NOT GREATER THAN 2104 DECIBELS.
3008	THE UNIT SHALL MEET THE ACCEPTANCE CRITERIA OF MIL-STD-740,
2092	NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2094	NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-7400.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOISE (CONT)	
PER MIL-STD-740. (CONT)	
AIRBORNE NOISE TESTING PROCEDURE.	3000
GRADE AND TYPE EQUIPMENT	
AIRBORNE GRADE	3002
STRUCTUREBORNE TYPE	3004
EQUIPMENT MOUNTING.	3006
OVERSPEED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2122
AS FOLLOWS:	2123
NO LOOSENING OF THE BLADES FROM THE HUB OR CENTRAL SUPPORT.	2126
NO CRACKS, BREAKS OR CHIPPING OF THE FAN BLADES.	2124
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2112

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3000	THE AIRBORNE NOISE TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE SOUND PRESSURE PROCEDURE.
3002	THE ITEM(S) SHALL BE NOISE TESTED PER AIRBORNE GRADE 3002 EQUIPMENT.
3004	THE ITEM(S) SHALL BE NOISE TESTED PER STRUCTUREBORNE TYPE 3004 EQUIPMENT.
3006	THE ITEM(S) SHALL BE TEST FIXTURE MOUNTED TO DUPLICATE SHIPBOARD INSTALLATION.
2122	OVERSPEED. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 2122.
2123	OVERSPEED, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2126	THERE SHALL BE NO LOOSENING OF THE BLADES FROM THE HUB OR CENTRAL SUPPORT,
2124	THERE SHALL BE NO CRACKS, BREAKS OR CHIPPING OF THE FAN BLADES.
2112	OVERSPEED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2112.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERSPEED (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2114
TEST SPEED (PERCENT OF RATED SPEED)	2116
RAIN	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2142
AS FOLLOWS:	2143
NO EVIDENCE OF PEELING OF PAINT, DAMAGE, ELECTRICAL SHORTS OR IRREGULAR OPERATION.	2144
NO FUNCTION DAMAGE OR IMPAIRMENT OF OPERATION.	2146
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2132
PER MIL-STD-810. METHOD 506.	2134

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2114	OVERSPEED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2114.
2116	TEST SPEED SHALL BE 2116 PERCENT OF THE MAXIMUM RATED SPEED.
2142	RAIN. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2142.
2143	RAIN. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2144	THERE SHALL BE NO EVIDENCE OF PEELING (IF PAINT, DAMAGE, ELECTRICAL SHORTS OR IRREGULAR OPERATION.
2146	THERE SHALL BE NO FUNCTIONAL DAMAGE OR IMPAIRMENT OF OPERATION.
2132	RAIN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2132.
2134	RAIN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 506.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4078
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE*	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD,	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD,	4766
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	73115
NO EVIDENCE OF PHYSICAL DAMAGE.	7316

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCKS THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311
PER MIL-STD-810, METHOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OR MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 5116 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 5116 OF MIL-STD-81.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE (CONT)	
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
PERCENT RATED LOAD APPLIED (PERCENT)	6204
MONITOR PER METHOD 3L0 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-2020 TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER ~~1499~~ OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 2070	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	3468
PER MIL-S-901.	2200
GRADE ____	2202
CLASS ____	2204
TYPE ____	2206
EQUIPMENT CLASSIFICATION ____	2208
TEST CLASSIFICATION ____	2210
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
2200	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH SPECIFICATION MIL-S-901.
2202	GRADE 2202 SHALL APPLY.
2204	CLASS 2204 SHALL APPLY.
2206	TYPE 2206 SHALL APPLY.
2208	EQUIPMENT CLASSIFICATION 2208 SHALL APPLY.
2210	TEST CLASSIFICATION 2210 SHALL APPLY.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1508.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
MEASUREMENTS BEFORE TEST	
OPERATING SPEED WITH LOAD (REVOLUTIONS PER MINUTE)	2517
OPERATING SPEED WITHOUT LOAD (REVOLUTIONS PER MINUTE)	2519
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2521
MEASUREMENTS AFTER TEST	
CPERATING SPEED WITH L0AD (REVOLUTIONS PER MINUTE)	2523
OPERATING SPEED WITHOUT LOAD (REVOLUTIONS PER MINUTE)	2525
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2527
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1502

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:00Z
Check the source to verify that this is the currentversion before use.

CHAR
CODE STANDARD PARAGRAPH

1509 SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4703 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

MEASUREMENTS BEFORE TEST SHALL BE AS FOLLOWS.

2517 SPEED WITH LOAD SHALL BE 2517 REVOLUTIONS PER MINUTE.

2519 SPEED WITHOUT LOAD SHALL BE 2519 REVOLUTIONS PER MINUTE.

2521 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2521 MEGOHM(S).

MEASUREMENTS AFTER TEST SHALL BE AS FOLLOWS.

2523 SPEED WITH LOAD SHALL BE 2523 REVOLUTIONS PER MINUTE.

2525 SPEED WITHOUT LOAD SHALL BE 2525 REVOLUTIONS PER MINUTE.

2527 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2527 MEGOHM(S).

1502 SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT EXCEPT 1502.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
SUNSHINE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2252
AS FOLLOWS:	2253
NO DEGRADATION OF FINISH.	2254
UNITS SHALL OPERATE SATISFACTORILY PER SPECIFIED REQUIREMENTS.	2256
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2232

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.
2252	SUNSHINE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2252.
2253	SUNSHINE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2254	THERE SHALL BE NO DEGRADATION OF THE FINISH.
2256	THE UNIT(S) SHALL OPERATE SATISFACTORILY PER SPECIFIED REQUIREMENTS.
2232	SUNSHINE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2232.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SUNSHINE (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 5050	2233
*PROCEDURE (NUMBER)	2234
PURPOSE OF TEST	2242
SOLAR RADIATION INTENSITY (SELECT ONE)	
(WATTS PER SQUARE FOOT)	2238
(WATTS PER SQUARE METER)	2240
TEST TEMPERATURE (DEGREES CELSIUS)	2236
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2233	SUNSHINE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 5050
2234	PROCEDURE NUMBER 2234 SHALL APPLY.
2242	THE PURPOSE OF THE TEST SHALL BE 2242.
2238	THE SOLAR RADIATION INTENSITY SHALL BE 2238 WATTS PER SQUARE FOOT.
2240	THE SOLAR RADIATION INTENSITY SHALL BE 2240 WATTS PER SQUARE METER.
2236	THE TEST TEMPERATURE SHALL BE 2236 DEGREES CELSIUS.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 501.	6218
*PROCEDURE (ROMAN NUMERAL)	6219
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-830, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5011 OF MIL-STD-810.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER MIL-STD-810, METHOD 502. (CONT)	
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6236 LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.

6237 CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.

6238 CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.

6315 OPERATING TIME SHALL BE 6315 MINUTE(S).

6316 OPERATING TIME SHALL BE 63~~116~~ HOUR(S).

1418 TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.

1433 TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

6296 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1410 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.

1375 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
PER MIL-STD-202, METHOD 211. (CONT)	
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1432
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4733
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
CURVE (LETTERS)	1525

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT L505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
3525	CURVE 1525 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-167, TYPE (NUMBER)	2280
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHODo	4709
NORMAL MOUNTING METHOD,	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE	
VISUALLY BY MEANS OF A STROBOTAC.	1533

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2280	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-167, TYPE 2280.
1455	VIBRATION, HIGH Frequency THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
3533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED Tolerance	1480
NO DISCONTINUITY DURING TESTe	1490
MEASUREMENTS BEFORE TEST	
OPERATING SPEED WITH LOAD (REVOLUTIONS PER MINUTE)	2529
OPERATING SPEED WITHOUT LOAD (REVOLUTIONS PER MINUTE)	2531
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2533
MEASUREMENTS AFTER TEST	
OPERATING SPEED WITH LOAD (REVOLUTIONS PER MINUTE)	2535
OPERATING SPEED WITHOUT LOAD (REVOLUTIONS PER MINUTE)	2537
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2539
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1475 VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN Accordance WITH THE BASE DOCUMENT, EXCEPT 1475.

1476 VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1480 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1490 THERE SHALL BE NO DISCONTINUITY DURING TEST.

MEASUREMENTS BEFORE TEST SHALL BE AS FOLLOWS.

2529 SPEED WITH LOAD SHALL BE 2529 REVOLUTIONS PER MINUTE.

25311 SPEED WITHOUT LOAD SHALL BE 2531 REVOLUTIONS PER MINUTE.

2533 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2533 MEGOHM(S).

MEASUREMENTS AFTER TEST SHALL BE AS FOLLOWS.

2535 SPEED WITH LOAD SHALL BE 2535 REVOLUTIONS PER MINUTE.

2537 SPEED WITHOUT LOAD SHALL BE 2537 REVOLUTIONS PER MINUTE.

2539 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2539 MEGOHM(S).

1466 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD,	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 234.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1426	Vibration RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 3438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 3431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 2114. (CONT)	
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	3462
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
WATER ABSORPTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2312
AS FOLLOWS:	2313
MAXIMUM CHANGE IN WEIGHT (PERCENT)	2314
MAXIMUM CHANGE IN DIMENSIONS (PERCENT)	2316

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
2332	WATER ABSORPTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE. DOCUMENT, EXCEPT 2312.
2313	WATER ABSORPTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2314	THE CHANGE IN WEIGHT SHALL BE NOT GREATER THAN 2314 PERCENT.
2316	THE CHANGE IN PHYSICAL DIMENSIONS SHALL BE NOT GREATER THAN 2316 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATER ABSORPTION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2302
PER FED-STD-406, METHOD 7031.	2304
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2302	WATER ABSORPTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	WATER ABSORPTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-406, METHOD 7031.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WCRKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002,
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
	ADDITIONAL PART MARKING.	
6991	(A) 6991.	
6992	(B) 6992.	
6993	(Cl 6993.	
6994	(D) 6994.	
6995	(E) 6995.	

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A275)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

I —

—AU



AM

—

AI--al

316-01-1


316-01-2

M

itFEAD


316-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

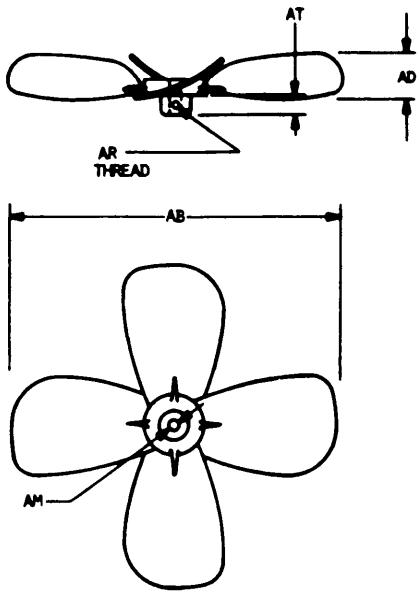


316-02-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

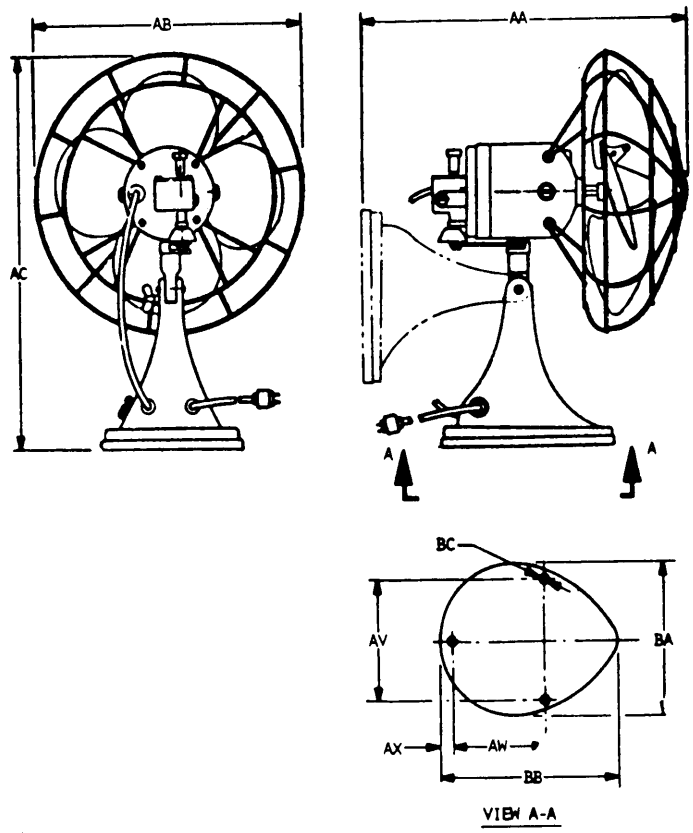


316-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

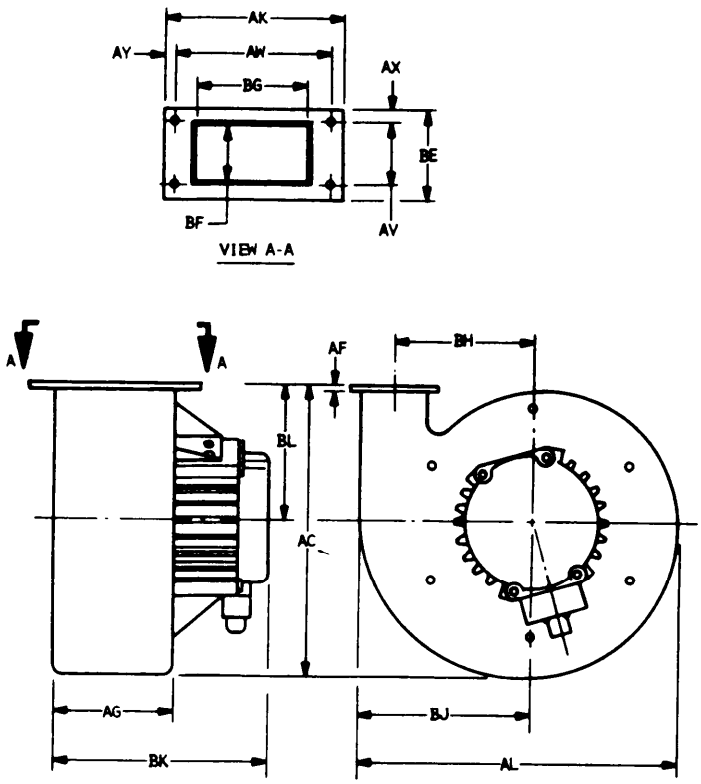


316-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

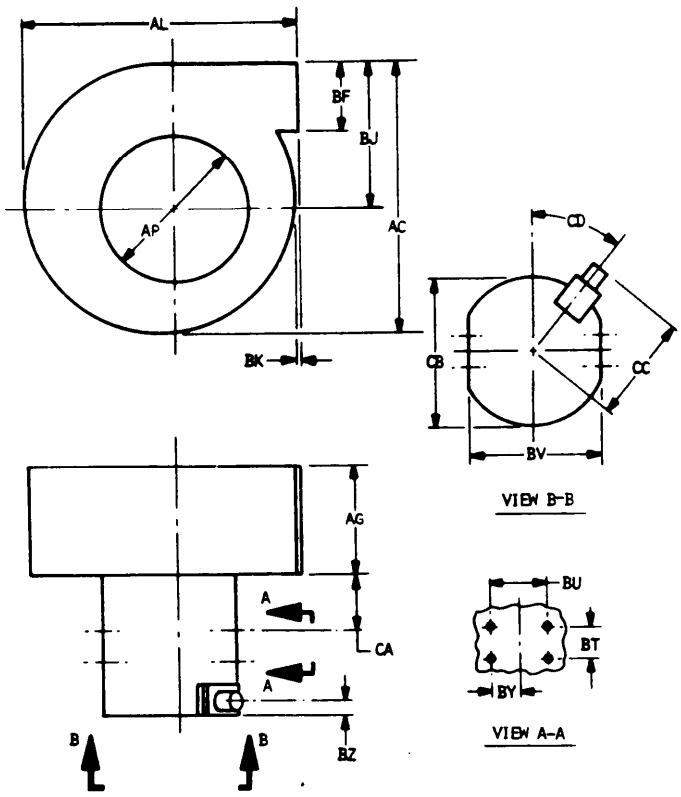


316-04-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

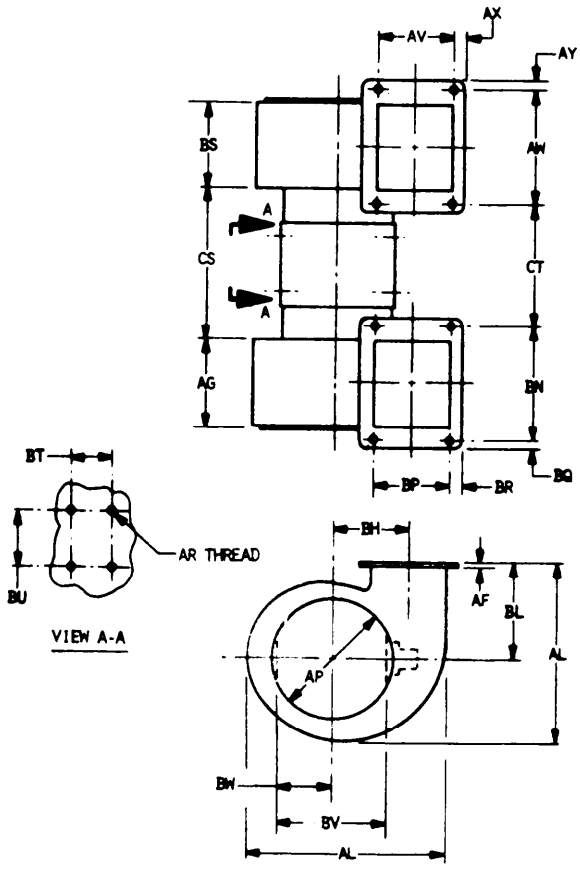


316-04-3

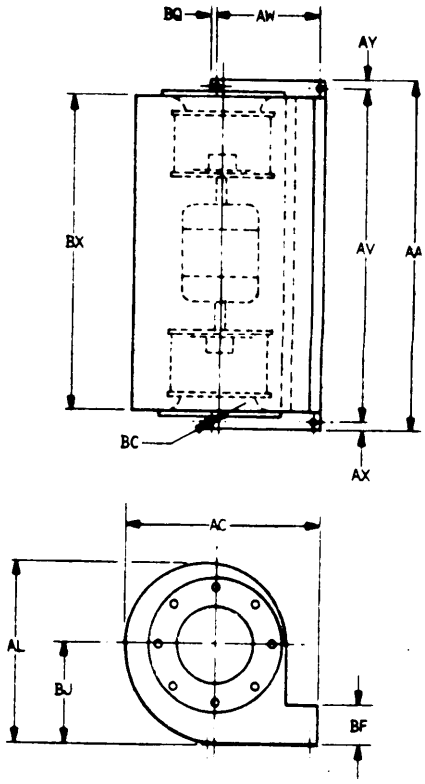


316-04-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

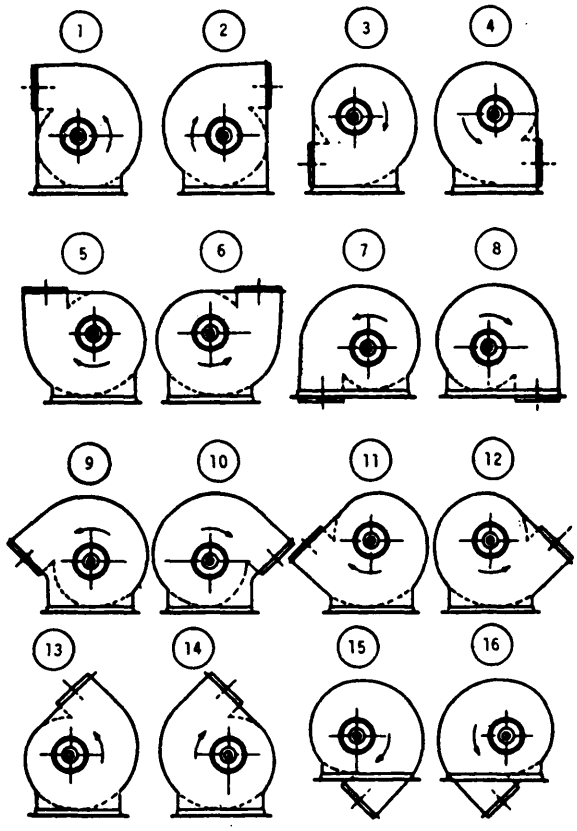


316-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

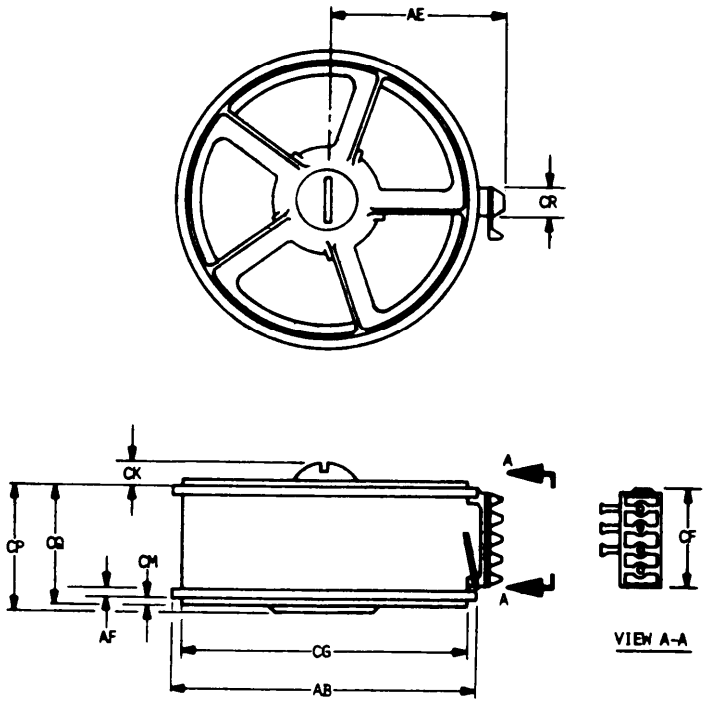


316-86-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

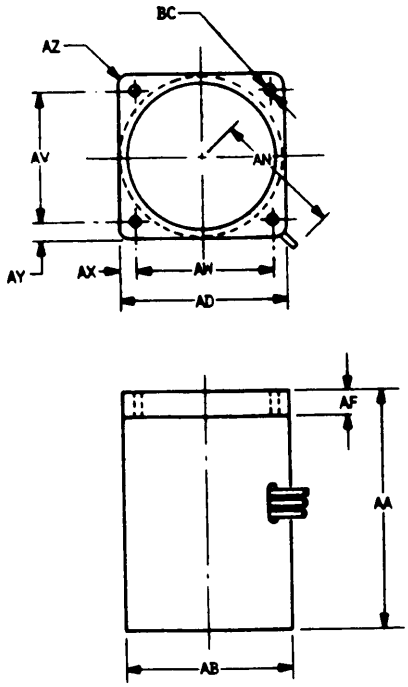


316-B6-2

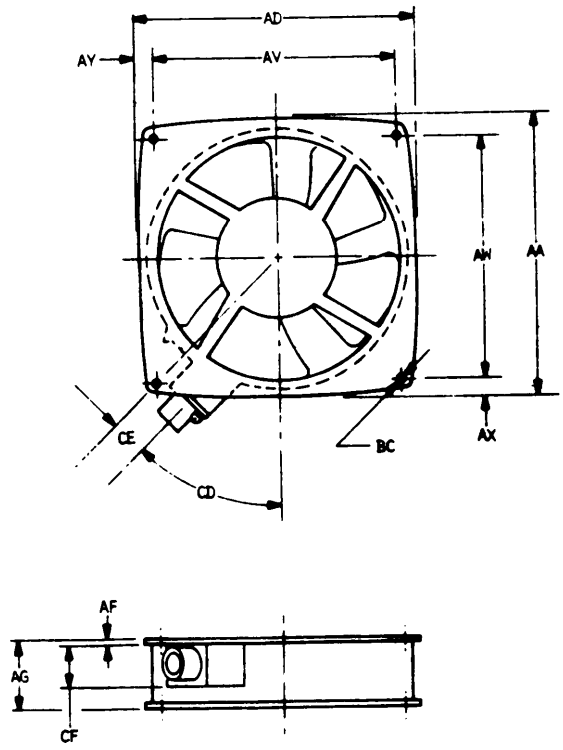


316-B6-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

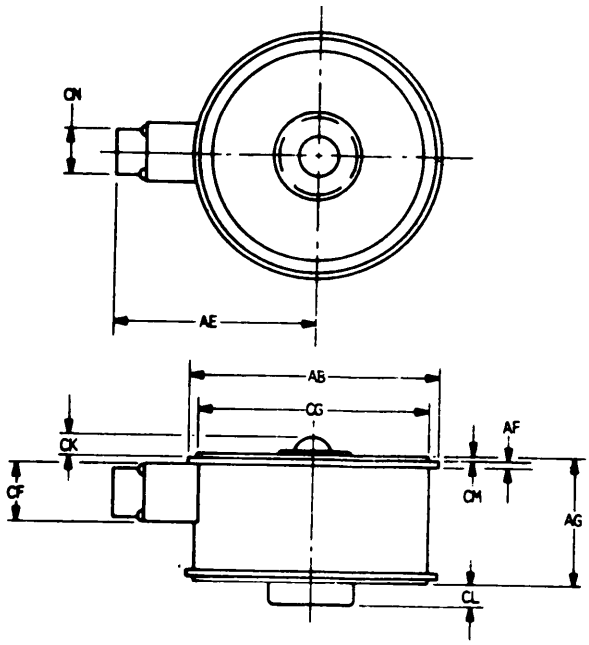


316-06-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

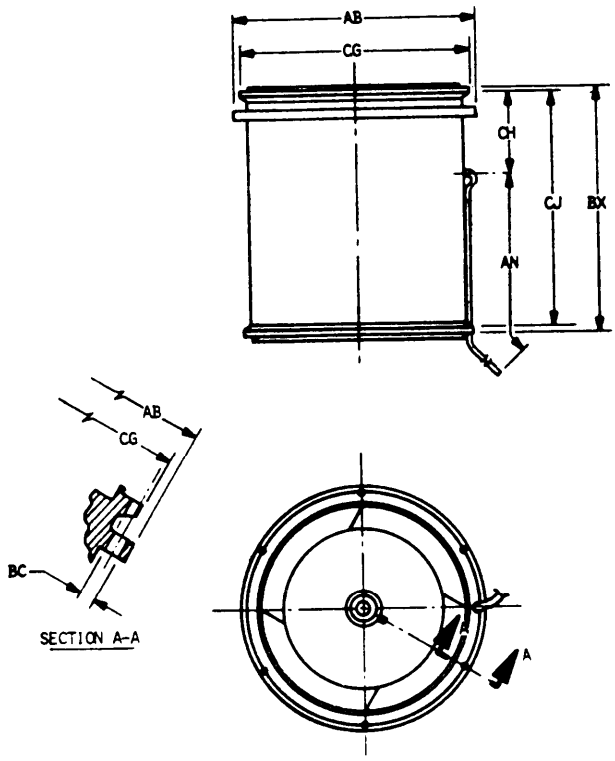


316-06-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

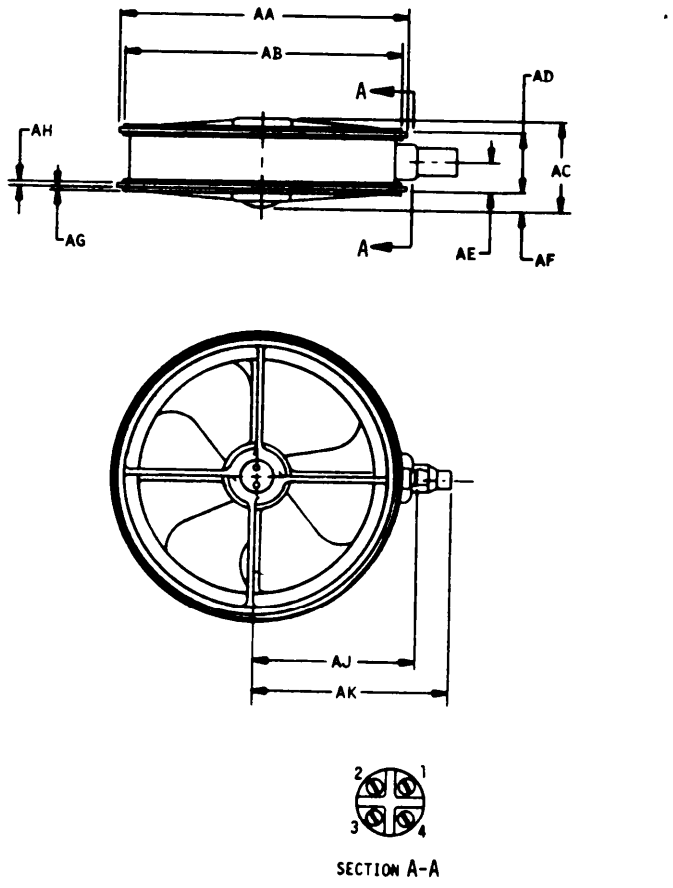


316-06-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

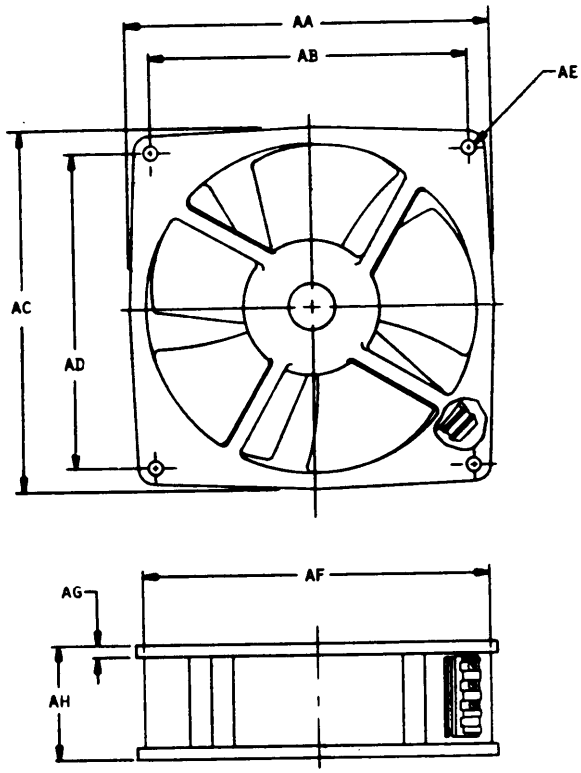


316-06-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

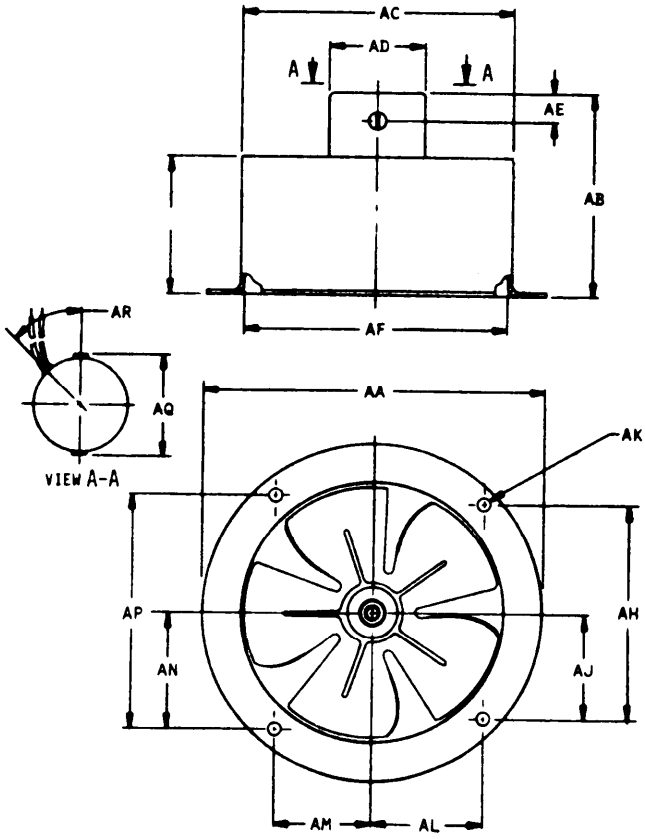


316-06-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

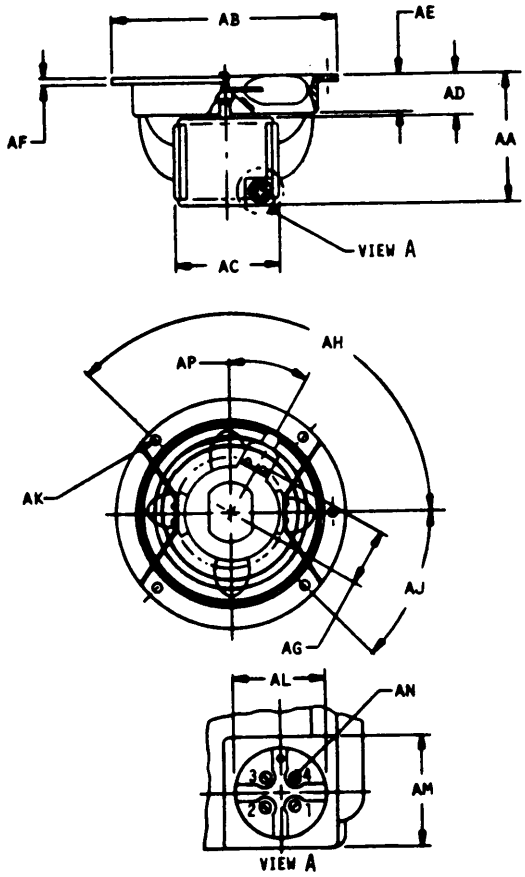


316-06-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

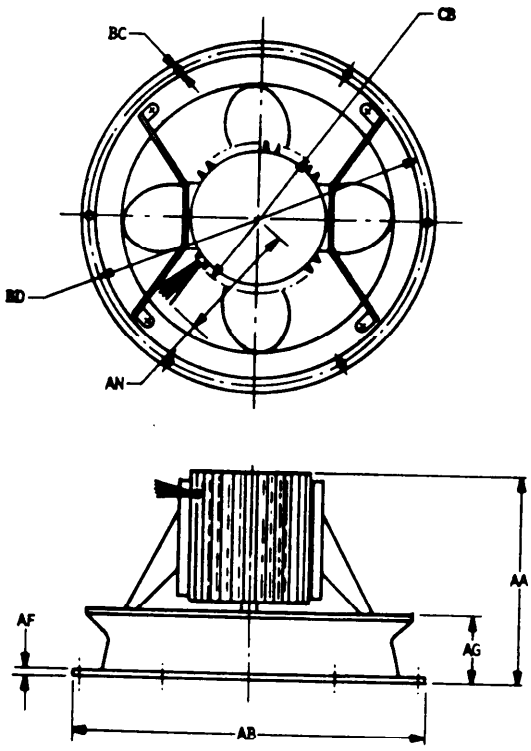


316-07-1

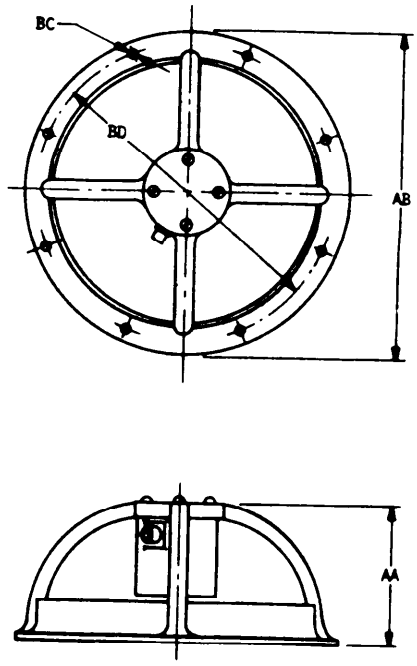


316-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

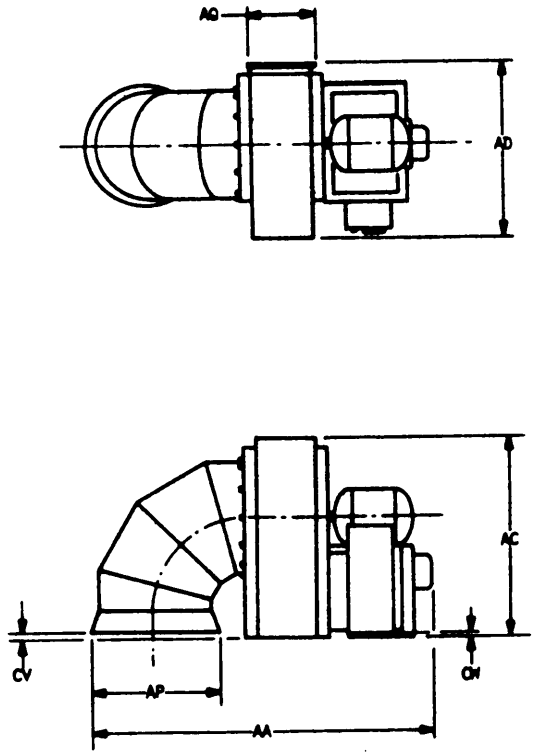



316-88-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

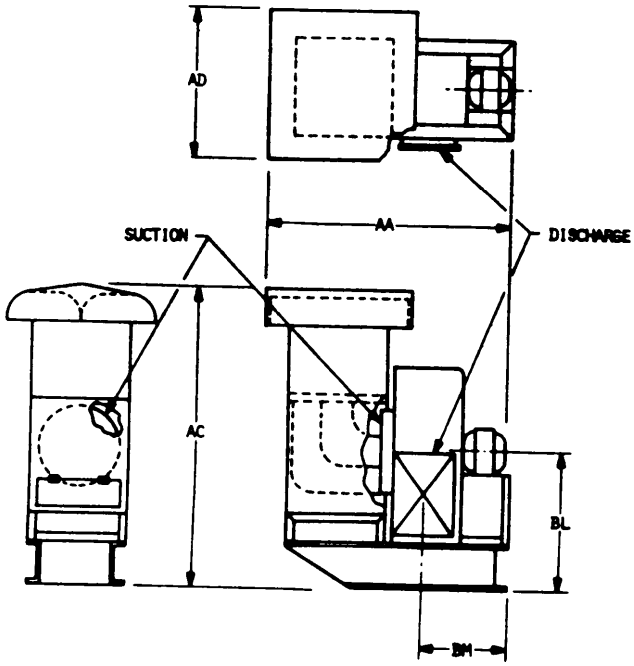


316-88-2

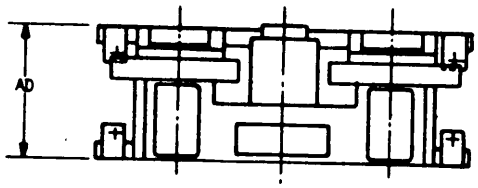

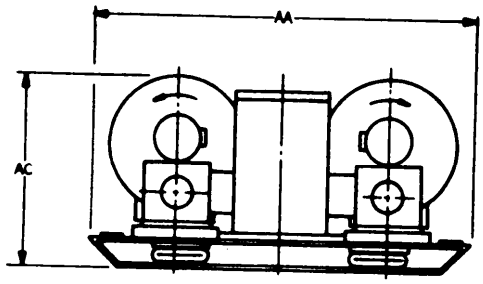


316-88-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

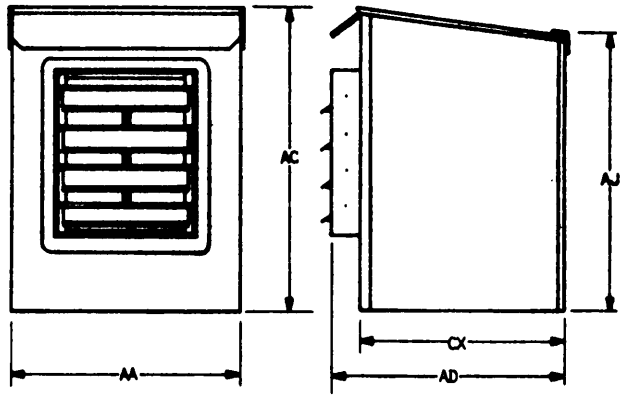


316-09-1

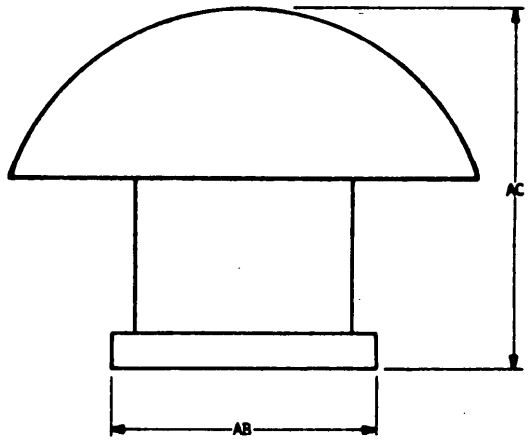


316-09-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

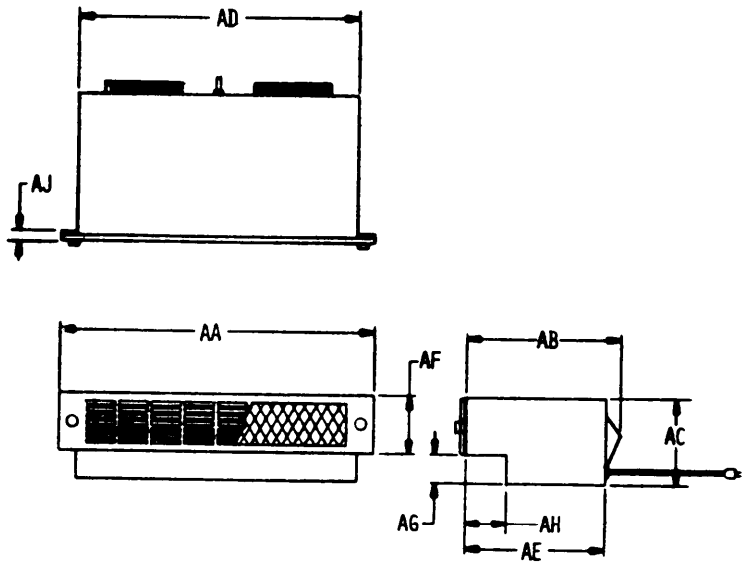

316-09-3

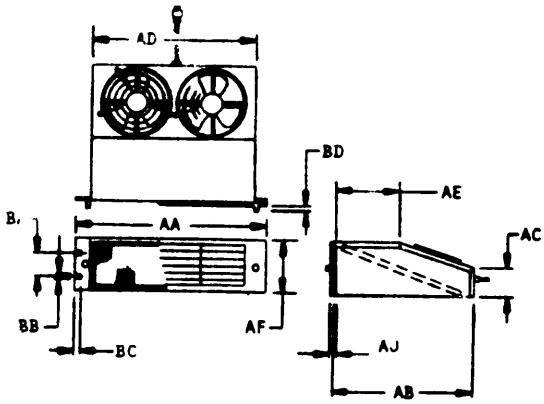


316-09-4

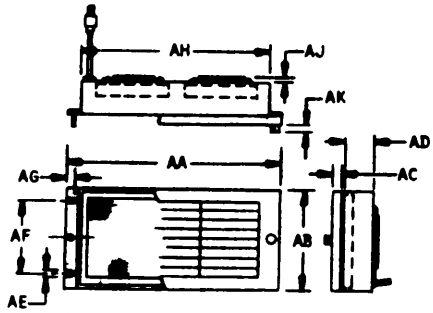


316-09-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.



316-10-1

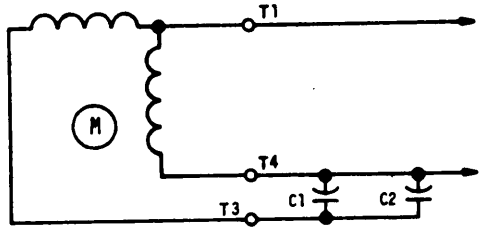

316-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1411	102	1486	90	1574	18
0102	12	1412	102	1468	90	1575	18
0103	12	1413	102	1490	108	1578	18
0104	12	1414	102	1494	98	1580	18
0105	12	1416	102	1495	86	1582	20
0107	14	1418	100	1499	88	1584	20
0108	14	1419	102	1500	94	1586	20
0700	12	1420	102	1502	92	1587	22
0800	12	1421	102	1503	86	1588	28
1003	12	1426	112	1504	94	1589	22
1004	12	1427	112	1505	104	1590	20
1005	12	1428	112	1508	90	1591	22
1006	12	1429	74	1509	92	1592	20
1008	12	1430	114	1510	54	1594	20
1009	22	1431	112	1511	70	1596	20
1371	70	1432	74	1514	104	1596	120
1372	72	1433	100	1518	104	1600	26
1373	70	1435	112	1520	72	1601	26
1375	100	1436	112	1522	72	1603	26
1376	70	1438	112	1523	72	1604	26
1377	72	1439	114	1524	72	1606	26
1378	70	1446	106	1525	104	1607	26
1380	68	1447	106	1533	106	1609	26
1381	72	1448	106	1535	110	1610	26
1383	72	1449	78	1536	110	1612	26
1384	70	1452	112	1537	110	1614	26
1386	70	1453	112	1538	112	1616	28
1387	70	1455	106	1539	54	1618	28
1388	70	1456	106	1554	66	1620	28
1391	76	1459	112	1555	66	1622	28
1394	74	1462	114	1556	66	1624	28
1395	76	1466	106	1562	20	1626	28
1396	74	1467	110	1563	18	1628	28
1397	76	1468	98	1564	18	1630	28
1398	74	1470	110	1565	18	1634	28
1400	72	1475	108	1566	18	1636	28
1404	74	1476	108	1567	18	1638	28
1406	74	1478	90	1568	18	1640	28
1407	70	1480	108	1570	18	1650	30
1410	100	1482	90	1572	14	1652	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE lNKK (CONTt

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1654	30	1796	36	1974	56	221O	90
1656	30	1800	38	1982	58	2232	94
1660	30	i802	38	1964	58	2233	96
1662	30	1804	38	1985	58	2234	96
1666	30	1810	40	1986	56	2236	96
1666	30	1812	40	1992	58	2238	96
1668	30	1814	4O	1993	58	2240	96
1670	30	1828	38	1994	58	Z242	96
1672	30	1821	38	2022	62	2252	96
1674	32	1822	38	2024	62	2253	94
1676	32	1624	38	2026	62	2254	94
1678	32	1825	38	2028	62	2256	96
1690	32	1828	38	2030	62	2280	106
1692	32	1829	38	2036	60	2302	116
1710	32	1890	40	2037	62	2304	116
1712	32	185Q	38	2038	62	2312	114
1714	32	1902	44	2450	62	2313	114
1716	34	1904	44	2092	78	2314	116
1718	34	1908	44	2094	78	2316	114
1720	34	1909	44	2102	78	2501	74
1730	34	1910	44	2183	78	2503	74
1732	34	1912	44	2104	78	2505	76
1736	34	1922	46	2112	80	2507	74
1736	34	1924	46	2114	82	2509	76
1738	34	1926	46	2116	82	2511	76
1748	34	1930	44	2122	80	2513	76
1750	36	1931	46	2123	80	2515	76
1752	36	1932	46	2124	89	2517	92
1754	36	1934	46	2126	80	2519	92
1756	36	1942	56	2132	82	2521	92
1758	36	1944	56	2134	92	2523	92
1770	36	1950	56	2102	92	2525	92
1772	36	1952	56	2143	92	2527	92
1774	36	1954	56	2144	82	2529	108
1780	36	1956	56	2146	82	2531	108
1782	36	1962	58	2200	90	2533	108
1786	36	1964	58	2202	90	2535	108
1788	36	1966	58	2204	90	2537	108
1790	36	1972	56	2206	90	2539	108
1794	36	1973	56	2208	90	2550	43

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2551	43	2591	43	2631	43	2671	43
2552	43	2592	43	2632	43	2672	43
2553	43	2593	43	2633	43	2673	43
2554	43	2596	43	2634	43	2676	43
2555	43	2595	43	2635	43	2675	43
2556	43	2596	43	2636	43	2676	43
2557	43	2557	43	2637	43	2677	43
2558	43	2598	43	2638	43	2678	43
2559	43	2599	43	2639	43	2679	43
2560	43	2600	43	2645	43	2680	43
2561	43	2601	43	2641	43	2681	43
2562	43	2612	43	2642	43	2682	43
2563	43	2603	43	2643	43	2683	43
2564	43	2604	43	2644	43	2684	43
2565	43	2605	43	2645	43	2685	43
2566	43	2606	43	2646	43	2686	43
2567	43	2607	43	2647	43	2687	43
2568	43	2608	43	2648	43	2688	43
2569	43	2609	43	2649	43	2689	43
2570	43	2610	43	2650	43	2690	43
2571	43	2611	43	2651	43	2691	43
2572	43	2612	43	2652	43	2692	43
2S73	43	2613	43	2653	43	2693	43
2574	43	2614	43	2654	43	2694	43
2575	43	2615	43	2655	43	2695	43
2576	43	2616	43	2656	43	2696	43
2577	43	2617	43	2657	43	2697	43
2578	43	2618	43	2658	43	2698	43
2579	43	2619	43	2659	43	2699	43
2580	43	2620	43	2660	43	2700	43
2581	43	2621	43	2661	43	2701	43
2582	43	2622	43	2662	43	2702	43
2583	43	2623	43	2663	43	2703	43
2584	43	2624	43	2664	43	2704	43
2585	43	2625	43	2665	43	2705	43
2586	43	2626	43	2666	43	2706	43
2587	43	2627	43	2667	43	2707	43
2568	43	2628	43	2668	43	2708	43
2589	43	2629	43	2669	43	2709	43
2590	43	2630	43	2670	43	2710	43

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC COOE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2711	43	3002	80	4778	64	4920	66
2712	43	3004	80	4782	84	4950	24
2713	43	3006	80	4788	64	4953	54
2714	43	3008	78	4790	66	4956	54
2715	43	4681	104	4793	66	4969	68
2716	43	4682	104	4796	62	4970	68
2717	43	4684	94	4799	62	4971	68
2718	43	4685	94	4800	64	4975	114
2719	43	4686	94	4801	54	4976	114
2720	43	4703	92	4840	54	4977	114
2721	43	4707	106	4844	52	4978	110
2722	43	4708	106	4945	52	4979	110
2723	43	4709	106	4846	52	4980	76
2724	43	4713	104	4847	50	4981	76
2725	43	4715	104	4849	48	4983	78
2726	43	4716	64	4853	66	4984	78
2727	43	4717	52	4854	52	4985	76
2728	43	4719	104	4855	52	4986	76
2729	43	4722	104	4856	so	4991	76
2730	43	4723	104	4861	52	5060	16
2731	43	4724	54	4862	52	5061	16
2732	43	4726	104	4867	52	5062	16
2733	43	4729	110	4871	64	5063	16
2734	43	4730	110	4872	54	5068	16
2735	43	4731	110	4874	50	5069	16
2736	43	4754	60	4875	50	5070	16
2737	43	4755	60	4878	88	5071	16
2738	43	4756	60	4884	48	6202	68
2739	43	4760	60	4885	48	6204	88
2740	43	4761	60	4886	48	6206	68
2741	43	4762	60	4890	66	6207	68
2742	43	4764	64	4891	50	6217	96
2743	43	4765	84	4894	48	6218	98
2744	43	6766	84	4895	54	6219	98
2745	43	4767	64	4897	52	6222	98
2746	43	4770	84	4901	48	6224	98
2747	43	4771	84	4906	48	6225	9$
2748	43	4772	84	4908	46	6228	96
2749	43	4773	84	4916	66	6229	96
3000	80	4777	84	4919	66	6231	98

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC OF INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6232	98	6994	118				
6234	98	6995	118				
6235	98	7001	116				
6236	100	7002	216				
623?	100	7003	116				
6238	100	7004	116				
6267	52	7005	116				
6292	50	7021	40				
6293	50	7022	40				
6294	50	7023	40				
6296	100	7024	40				
6299	54	7301	16				
6300	48	73Q2	16				
6315	100	7305	86				
6316	100	7306	86				
6318	98	7307	88				
6319	98	7308	88				
6327	86	7309	88				
6334	64	7311	86				
6335	64	7312	06				
6336	64	7313	06				
6337	64	7315	84				
6338	86	7316	84				
6344	86	7317	86				
6345	86	7318	66				
6346	86	7572	22				
6347	86	7573	22				
6348	88	7574	22				
6349	88	7576	24				
6359	68	7577	24				
6369	12	7578	24				
6372	116	7588	26				
6870	116	7629	116				
6873	12	7630	116				
6874	14						
6941	14						
6942	14						
6991	118						
6992	118						
6993	118						

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

INDEX

Page

Accessories - 32
Additional Part Marking - 118
Additional Requirements - 116
Altitude Rating - 16
Aperture Cards Required - 14
Applicable Documents- 118

Balance/Vibrations- 44
Base Document - - - - - -- 12
Blade Type - 38

City, State, Zip- - - - - -- 12
Company Name/Command - 12
Configuration - 22
Cold Start - 44
Contract Number/Office Symbol - - - - - - - - - - - - - - - - - - - 12
Control, Source - 12
Control, Specification - 14

Date ---------- 12
Design and Construction - 26
Dielectric Withstanding Voltage at Reduced Barometric Pressure - - - 46
Dielectric Withstanding Voltage at Sea Level - - - - - - - - - - - 50
Driver Controller - 34
Dust ---------- 54

Electric Motor Fan Driver - 26
Electromagnetic Interferer - 56
Endurance - 56
Explosive Atmosphere- 58

Fan Bearing - 36
Fan Performance Rating- 18
Fan Rating Basis- - - - -- 20
Finishes- 24
Format ---------- 12
Fungus ----------- 60

General Characteristics - 38
Government Design Activity FSCM - - - - - - - - - - - - - - - - - - 12

Housing Wind Test - 60
Humidity - 62

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Illustrations - 24
Insulation Resistance - 68
Internal Combustion - 32

Materials - 24
Metals- 26
Moisture Resistance - 72
Mounting Hardware - 116

Noise - 78
Nomenclature- 118
Notes - 118

Overspeed - 80

Packaging - 118
Part Marking- 116
Part Number - 14
Part Number Cross-Reference - 118
Performance Characteristics - 42
Phone Number- 12

Quality Assurance Provisions - 118

Rain ------- 82
Requester SFSCM- 12
Requester's Name- 12
Revision of AEDPS Document (Number) - 14

Safety- 40
Salt Spray- 84
Scope ------ 14
Shock ----- 84
Shock, High Impact- 88
Shock, Specified Pulse- 90
Source Table- 14
Steam Turbine Fan Driver- 30
Street/Building - 12
Sunshine- 94
Superseded Document - 118
System Application- 12

Tabulated Characteristics - 24
Temperature, High - 96

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Temperature, Low - 98
Temperature Rating - 16
Terminal Strength - 100
Thermal Shock- 104

Units of Measure - 14,22

Vibration - 104
Vibration - 106
Vibration- 108
Vibration- 112

Water Absorption - 114
Weight - 40
Workmanship- 116

*U.S. OOVERNMENT PRINTING OFPICE: 1979-603-022/2270

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80
*REQUESTER'S NAME		Ø 1 Ø 1		
*COMPANY NAME/COMMAND		Ø 1 Ø 2		
*STREET/BUILDING		Ø 1 Ø 3		
*CITY, STATE, ZIP		Ø 1 Ø 4		
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5		
*DATE		1 Ø Ø 3		
*REQUESTER FSCM		1 Ø Ø 4		
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5		
*BASE DOCUMENT		1 Ø Ø 6		
*SYSTEM APPLICATION		1 Ø Ø 8		
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9		
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø		
ONE SECTION DOCUMENT.		Ø 8 Ø Ø		
SEARCH ONLY.		Ø 1 Ø 6		
APERTURE CARDS REQUIRED.		Ø 1 Ø 7		
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8		
*CONTROL SOURCE.		6 8 7 3		
SPECIFICATION.		6 8 7 4		
*SOURCE TABLE		9 1 5 1		
UNIT OF MEASURE U.S.		6 9 4 1		
SI.		6 9 4 2		

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: DoD STD 25-85A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD -314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Comnand,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.