MIL-I-50298 (AR)
7 July 1977
SUPERSEDING
See Section 6

MILITARY SPECIFICATION

INTERCONNECTING BOX: XM53

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of interconnecting box, entitled Interconnecting Box: XM53 which is used with the Sprint warhead.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-R-39005	- Resistors, Fixed, Wirewound, (Accurate) Established Reliability, General Specifications for.
MIL-R-39007	- Resistors, Fixed, Wirewound, (Power Type), Established Reliability, General Specifications for.
MIL-S-50967	- Switch, Electro-explosive, Instant/Delay.
MIL-T- 45896	- Transformer Assembly.

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

GEORGE C. MARSHALL SPACE FLIGHT CENTER

MSFC-SPEC-339/73C	- Specification, Relays, DC, Hermetically Sealed for Space Launch Vehicles and Associated Support Equipment.

Beneficial comments (recommendations, additions, deletions), and any pertinent data which may be of use in improving this document, should be addressed to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAN-Q. Dover, New Jersey 07801, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426), appearing at the end of this document, or by letter.

FSC 1135

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-1460 - Soldering of Electrical Connections and Printed Wiring Assemblies, Procedure For.
MIL-STD-1168 - Lot Numbering of Ammunition.

DRAWINGS

PICATINNY ARSENAL

8888408 - Interconnecting Box: XM53.
9241798 - Connector J1.
9249216 - Connector J3.
9254806 - Toroidal Transformer Assembly.
9266791 - Switch Electro-Explosive, Instant/Delay.
9266829 - Switch Electro-Explosive, Instant/Delay.
9266833 - Switch Electro-Explosive, Instant/Delay.
9266835 - Switch Electro-Explosive, Instant/Delay.
9269141 - Connector J2.
9271068 - Connector J4.
9272744 - Printed Wiring Board "A".
9272747 - Printed Wiring Board "B".
9272750 - Printed Wiring Board "C".
9272836 - Diodes.
9272901 through 9272920 - Printed Cable Assemblies.
9282823 - Packing and Marking for Box, Fiberboard, Packing for IC Box in Carrying Case.
9293213 - Packing and Marking for Case, Carrying, XM53 IC Box.
9280850 - Fuse Switch.
9285492 - Case, Carrying XM53 IC Box.
9272742 - Circuit Card Assembly: Board A.
9272745 - Circuit Card Assembly: Board B.
9272748 - Circuit Card Assembly: Board C.
9272743 - Printed Wiring Board and Terminal Assembly A.
9272746 - Printed Wiring Board and Terminal Assembly B.

Source: https://assist.dla.mil -- Downloaded: 20261010-22T20:20Z
Check the source to verify that this is the current version before use.

9272749 - Printed Wiring Board and Terminal Assembly C.
9274120 through 9274124 - Plate Identification.
9272751 through 9272754 - Printed Cable and Connector Assembly J1 through J4.
9274134 through 9274136 - Insulator, Printed Cable Assembly, Flexible: No. 14 through 16.
9289073 - Plate Assembly.
EL-8888408 - Equipment List.

SUPPLEMENTARY QUALITY ASSURANCE PROVISIONS

PICATINNY ARSENAL

SQAP 9272751 - Printed Cable and Connector Assembly J1.
SQAP 9272752 - Printed Cable and Connector Assembly J2.
SQAP 9272753 - Printed Cable and Connector Assembly J3.
SQAP 9272754 - Printed Cable and Connector Assembly J4.
SQAP 9272836 - Diodes.
SQAP's 9272901 through 9272920 - Printed Cable Assembly, Flexible: No. 1 through Printed Cable Assembly, Flexible: No. 20.
SQAP's 9274120 through 9274124 - Plate Identification.
SQAP 9274134 - Insulator, Printed Cable Assembly, Flexible: No. 14.
SQAP 9274135 - Insulator, Printed Cable Assembly, Flexible: No. 15.
SQAP 9274136 - Insulator, Printed Cable Assembly, Flexible: No. 16.
SQAP 9280850 - Fuze Switches.

PUBLICATIONS

PICATINNY ARSENAL

QAI-PA-1 - Quality Assurance Instructions for Reporting Data on Nuclear Weapons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The interconnecting box (IC) shall comply with all requirements specified on the drawing (dwg) 8888408, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. The contractor shall assign serial numbers as required by drawings. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated.

3.5 Coded serialization requirements (see 6.1.2). The contractor shall supply feedback data on punch cards for any item for which coding is required in section 3. The feedback data shall be in accordance with QAI-PA-1.

3.6 Major components. For major components to be used in the IC Box, objective evidence (see 6.2) indicating that the following components conform to their respective specifications or drawings shall be made available to the Government representative:

a. Printed Cable Assemblies - SQAP's 9272901 through 9272920.
b. Electro-Explosive Switches - MIL-S-50967.
c. Toroidal Transformer Assemblies - MIL-T-45896.
d. Relays - MSFC-SPEC-339/73C.
e. Resistors - MIL-R-39007, MIL-R-39005.
f. Connectors J1, J2, J3 and J4 - Drawings 9241798, 9269141, 9249216 and 9271068 respectively.
g. Printed Wiring Boards A, B and C - Drawings 9272744, 9272747 and 9272750.
h. Diodes - SQAP 9272836.
i. Fuze Switches - SQAP 9280850.
j. Printed Cable and Connector Assemblies J1, J2, J3 and J4 - SQAP's 9272751 through 9272754.
k. Plate Identification - SQAP's 9274120 through 9274124.
l. Insulator, Printed Cable Assembly, Flexible: No's 14, 15 and 16 - SQAP's 9274134 through 9274136.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

3.7 Circuit resistance. The circuit resistance between the points specified in 3.7.1, 3.7.2, 3.7.3, 3.7.4 and 3.7.5 shall be within ± 5% of the indicated value (unless otherwise specified) when tested as specified in 4.4.1. Test current shall be not greater than 10 milliamperes.

3.7.1 Circuit card assembly: board A (see dwg 9272742).

Table I

Item	From Hole	To Hole	Ohms Resistance
1	A41	A221	40K
2	A41	A286	70K
3	A41	A32	70K
4	A221	A286	70K
5	A221	A32	70K
6	A286	A32	100K
7	A276	A6	0.1 max
8	A276	A189	0.1 max
9	A276	A188	1.8 ± 0.3
10	A276	A134	0.1 max
11	A276	A207	1.8 ± 0.3
12	A276	A217	1.8 ± 0.3
13	A276	A16	10
14	A286	A207	18.2
15	A286	A181	18.2
16	A286	A153	50K
17	A221	A222	0.1 max
18	A221	A153	20K
19	A41	A31	0.1 max
20	A116	A217	0.1 max
21	A108	A6	10
22	A283	A16	0.1 max
23	A283	A322	14K
24	A98	A19	0.1 max
25	A112	A143	18.2
26	A112	A226	16.5K
27	A32	A187	0.1 max
28	A32	A43	1K
29	A383	A387	0.1 max
30	A383	A187	10K max

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

Table I (Con't)

Item	From Hole	To Hole	Ohms Resistance
31	A383	A169	2.49
32	A383	A223	14K
33	A171	A4	0.1 max
34	A171	A13	14K
35	A246	A297	0.1 max
36	A246	A326	14K
37	A342	A291	0.1 max
38	A342	A331	9.76K
39	A349	A334	0.1 max
40	A349	A287	0.1 max
41	A349	A279	0.1 max
42	A79	A57	0.1 max
43	A79	A63	0.1 max
44	A79	A99	0.1 max
45	A79	A109	0.1 max
46	A79	A247	0.1 max
47	A79	A17	10K
48	A79	A21	10K
49	A44(+)	A96(-)	10K max
50	A96(+)	A44(-)	90.9K
51	A96	A278	0.1 max
52	A96	A268	0.1 max
53	A96	A254	16.5K
54	A76	A126	0.1 max
55	A76	A119	0.1 max
56	A113	A121	0.1 max
57	A113	A117	0.1 max
58	A113	A127	0.1 max
59	A49	A34	34.8K
60	A351	A344	0.1 max
61	A128	A67	0.1 max
62	A202	A201	0.1 max
63	A199	A146	0.3 max
64	A294	A149	0.3 max
65	A174	A154	0.3 max

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

Table I (Con't)

Item	From Hole	To Hole	Ohms Resistance
66	A304	A314	0.1 max
67	A204	A293	0.1 max
68	A194	A176	0.1 max
69	A343	A88	0.1 max
70	A259	A263	0.1 max
71	A38(+)	A389(-)	62.5K
72	A38	A391	20 ± 0.3

3.7.2 Circuit card assembly: board B (see dwg 9272745).

Table II

Item	From Hole	To Hole	Ohms Resistance
1	B59	B22	0.1 max
2	B3	B24	1K
3	B3	B173	0.1 max
4	B318	B328	0.1 max
5	B318	B4	120K
6	B4	B166	2.49
7	B4	B173	10K max
8	B4	B216	14K
9	B4	B43	100K
10	B286	B43	0.1 max
11	B303	B318	53.3K
12	B303	B4	133.3K
13	B303	B18	0.1 max
14	B303	B118	0.1 max
15	B303	B177	0.1 max
16	B303	B122	1.8 ± 0.3
17	B303	B183	1.8 ± 0.3
18	B303	B218	1.8 ± 0.3
19	B323	B183	18.2
20	B323	B184	18.2
21	B111	B218	18.2
22	B222	B218	16.5K
23	B264	B177	10
24	B264	B121	0.1 max
25	B264	B252	14K

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:20Z
Check the source to verify that this is the currentversion before use.

Table II (Con't)

Item	From Hole	To Hole	Ohms Resistance
26	B167	B88	1K
27	B107	B79	10K max
28	B79	B107	90.9K
29	B314	B79	0.1 max
30	B296	B79	0.1 max
31	B344	B79	16.5K
32	B113	B51	10K
33	B113	B103	0.1 max
34	B113	B39	10K
35	B113	B258	0.1 max
36	B113	B72	0.1 max
37	B113	B81	0.1 max
38	B113	B278	0.1 max
39	B257	B289	0.1 max
40	B257	B337	14K
41	B137	B186	0.1 max
42	B137	B63	1K
43	B188	B182	0.3 max
44	B188	B237	1K
45	B169	B19	14K
46	B169	B26	0.1 max
47	B194	B331	0.3 max
48	B194	B238	1K
49	B372	B324	0.1 max
50	B372	B316	0.1 max
51	B371	B383	9.76K
52	B224	B226	0.1 max
53	B69	B34	34.8K
54	B134	B41	1K
55	B47	B276	0.1 max
56	B199	B272	1K
57	B114	B68	0.1 max
58	B176	B378	10.09K
59	B83	B98	0.1 max
60	B366	B277	0.1 max

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:20Z
Check the source to verify that this is the currentversion before use.

Table II (Con't)

Item	From Hole	To Hole	Ohms Resistance
61	B366	B261	9.76K
62	B356	B279	0.1 max
63	B356	B377	14K
64	B351	B312	0.1 max
65	B419	B421	20 ± 0.3
66	B419	B159	90.9K
67	B351	B364	14K
68	B141	B332	0.1 max
69	B358	B332	1K

3.7.3 Circuit card assembly: board C (see dwg 9272748).

Table III

Item	From Hole	To Hole	Ohms Resistance
1	C48	C31	0.1 max
2	C68	C11	14K
3	C68	C38	0.675 to 0.920
4	C68	C74	364 ± 36
5	C74	C42	0.1 max
6	C74	C8	0.1 max
7	C89	C69	0.1 max
8	C89	C61	0.1 max
9	C87	C47	0.1 max
10	C87	C14	0.1 max
11	C87	C77	5.9 ± 0.2
12	C77	C18	0.1 max
13	C77	C54	11.7 ± 0.4
14	C77	C102	11.7 ± 0.4
15	C77	C9	11.7 ± 0.4
16	C77	C4	14K
17	C77	C107	5.9 ± 0.2
18	C79	C6	0.1 max
19	C79	C14	20K
20	C79	C59	40.2K

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

Table III (Con't)

Item	From Hole	To Hole	Ohms Resistance
21	C79	C34	0.1 max
22	C79	C56	40.2K
23	C59	C16	14K
24	C59	C66	0.1 max
25	C59	C83	0.1 max
26	C98	C94	0.1 max
27	C103	C29	1K
28	C62	C133	1K
29	C133	C124	0.1 max
30	C133	C22	63.4K
31	C22	C141	0.1 max
32	C22	C123	0.1 max

3.7.4 Circuit card assemblies "A" and "B" (after soldering interdeck wires between circuit card assemblies: Boards "A" and "B"). NOTE: To perform the circuit resistance tests, listed in Table IV, jumpers must be provided in the test equipment between the circuit card assembly, board "B" holes, as indicated in the applicable column.

Table IV

Item	From Hole	To Hole	Test Jumper From Hole	To Hole	Interdeck Wire "A"	"B"	Ohms Resistance
1	A187	A189	B173	B177	22	26	0.050 max
2	A169	A171	B153	B154	16	18	0.050 max
3	A247	A246	B248	B249	31	32	0.050 max
4	A278	A153	B292	B286	37	10	0.050 max
*5	A278	A279	B292	B272	37	38	0.100 max
			B293	B273	34	35	
6	A286	A287	B298	B299	39	40	0.050 max
*7	A334	A342	B362	B96	50	53	0.100 max
			B368	B363	8	52	
8	A179	A183	B166	B169	19	23	0.050 max
9	A250	A251	B257	B258	33	36	0.050 max
10	A308	A309	B323	B324	45	46	0.050 max

*Two separate jumpers required.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:20Z
Check the source to verify that this is the current version before use.

Table IV (Con't)

Item	From Hole	To Hole	Test Jumper From Hole	To Hole	Interdeck Wire "A"	Interdeck Wire "B"	Ohms Resistance
11	A301	A302	B314	B316	43	44	0.050 max
12	A337	A344	B366	B372	51	54	0.050 max
13	A199	A201	B191	B192	27	29	0.050 max
14	A242	A324	B242	B346	30	47	0.050 max
15	A193	A196	B182	B186	25	28	0.050 max
16	A293	A294	B306	B307	41	42	0.050 max
17	A317	A318	B331	B332	48	49	0.050 max
18	A174	A176	B161	B162	17	20	0.050 max
19	A68	A251	B77	B81	5	36	0.100 max
20	A121	A251	None	Req'd	12	36	0.100 max
21	A64	A251	B69	B72	4	36	0.100 max
22	A126	A128	B116	B121	13	15	0.100 max
23	A142	A209	B184	B122	21	24	0.100 max
24	A108	A49	B57	B59	1	2	0.100 max
25	A112	A58	B61	B68	3	14	0.100 max

3.7.5 Interconnecting box: XM53 (after assembly to plate assembly 9289073) (see dwg 8888408).

Table V

Item	From	To	Ohms Resistance	*Test Code (see 3.5 & Table VI)
1	J3-A	J2-P	1K	7501--
2	J3-B	J2-U	1K	7502--
3	J3-C	J1-E	14K	7503--
4	J3-D	J1-c	14K	7504--
5	J3-E	J1-$\overline{P}$	16.5K	7505--
6	J3-F	J1-L	14K	7506--
7	J3-G	J1-b	14K	7507--
8	J3-H	J2-$\overline{A}$	10.09K	7508--
9	J3-M	J3-P	20K	7509--
10	J3-N	J3-f	2K	7510--
11	J3-P(+)	J1-P(-)	10K to 25K	7511--
12	J3-R	J2-h	1K	7512--
13	J3-S(+)	J3-$\overline{N}$(-)	14K to 25K	7513--
14	J3-T	J1-E	16.5K	7514--
15	J3-U	J1-F	16.5K	7515--

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

Table V (Con't)

Item	From	To	Ohms Resistance	*Test Code (see 3.5 & Table VI)
16	J3-V(+)	J3-f(-)	10K to 25K	7516--
17	J3-W	J1-H	9.76K	7517--
18	J3-X	J3-Y	20K	7518--
19	J3-X(+)	J1-R(-)	10K to 25K	7519--
20	J3-b	J2-B	10.09K	7520--
21	J3-c	J2-f	1K	7521--
22	J3-e	J4-A	14K	7522--
23	J3-f(+)	J2-R(-)	101K	7523--
24	J3-g	J1-J	9.76K	7524--
25	J3-h	J1-R	16.5K	7525--
26	J3-k	J4-E	14K	7526--
27	J3-m	J1-M	14K	7527--
28	J3-n	J1-F	14K	7528--
29	J3-p	J3-x	0.4 max	7529--
30	J3-BB	J2-K	14K	7530--
31	J3-DD	J2-a	14K	7531--
32	J3-EE	J2-F	0.2 max	7532--
33	J3-GG	J2-J	0.2 max	7533--
34	J2-S	J1-C	20K	7534--
35	J2-R(+)	J3-S(-)	114K	7535--
36	J2-S(+)	J3-V(-)	114K	7536--
37	J2-a	J3-FF	74.2K	7537--
38	J2-b	J3-FF	74.2K	7538--
39	J2-J	J2-K	327 to 401	7539--
40	J1-B	J1-C	0.1 max	7540--
41	J1-B	J4-B	0.150 max	7541--
42	J1-B	J4-C	0.150 max	7542--
43	J2-E	Printed Wiring (P.W.) Bd "C" Hole C98	0.2 max	7543--
44	J3-d	P.W. Bd "B" Hole B34	0.150 max	7544--
45	J2-N	P.W. Bd "A" Hole A154	0.1 max	7545--

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:20Z
Check the source to verify that this is the currentversion before use.

Table V (Con't)

Item	From	To	Ohms Resistance	*Test Code (see 3.5 & Table VI)
46	J2-T	P.W. Bd "A" Hole A149	0.1 max	7546--
47	J2-V	P.W. Bd "A" Hole A146	0.1 max	7547--
48	J2-e	P.W. Bd "A" Hole A194	0.1 max	7548--
49	J2-g	P.W. Bd "A" Hole A204	0.1 max	7549--
50	J2-i	P.W. Bd "A" Hole A202	0.1 max	7550--
51	J3-Z	P.W. Bd "A" Hole A34	0.1 max	7551--
52	J3-S	F.C. Assy No. 1, Hole 34	14K	7552--
53	J3-N	F.C. Assy No. 1, Hole 39	1K	7553--
54	J3-f	F.C. Assy No. 2, Hole 2	1K	7554--
55	J3-V	F.C. Assy No. 2, Hole 9	14K	7555--
56	J3-X	F.C. Assy No. 3, Hole 12	10K	7556--
57	J3-P	F.C. Assy No. 3, Hole 31	10K	7557--
58	F.C. Assy No. 3, Hole 29(+)	J1-R(-)	10K max	7558--
59	F.C. Assy No. 3, Hole 31(+)	J1-P(-)	10K max	7559--

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

Table V (Con't)

Item	From	To	Ohms Resistance	*Test Code (see 3.5 & Table VI)
60	J2-D	F.C. Assy No. 4, Hole 2	1K	7560--
61	J3-w	F.C. Assy No. 4, Hole 23	0.2 max	7561--
62	J3-z	F.C. Assy No. 4, Hole 26	0.2 max	7562--
63	J3-y	F.C. Assy No. 4, Hole 27	0.2 max	7563--
64	J3-AA	F.C. Assy No. 4, Hole 42	0.2 max	7564--
65	J3-r	F.C. Assy No. 4, Hole 44	0.2 max	7565--
66	J3-q	F.C. Assy No. 4, Hole 47	0.2 max	7566--
67	J2-Y	F.C. Assy No. 4, Hole 57	1K	7567--
68	J3-FF	F.C. Assy No. 5, Hole 1	14K	7568--
69	J3-FF	F.C. Assy No. 5, Hole 2	14K	7569--
70	J3-FF	F.C. Assy No. 5, Hole 3	14K	7570--
71	J2-J	F.C. Assy No. 5, Hole 19	0.2 max	7571--
72	J2-C	F.C. Assy No. 5, Hole 21	1K	7572--
73	J2-Z	F.C. Assy No. 5, Hole 22	64.4K	7573--
74	J2-c	F.C. Assy No. 5, Hole 27	0.2 max	7574--

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

Table V (Con't)

Item	From	To	Ohms Resistance	*Test Code (see 3.5 & Table VI)
75	J2-K	F.C. Assy No. 5, Hole 29	0.775 to 1.00	7575--
76	J3-FF	F.C. Assy No. 5, Hole 31	14K	7576--
77	J3-FF	F.C. Assy No. 5, Hole 32	14K	7577--
78	J3-FF	F.C. Assy No. 5, Hole 33	14K	7578--
79	J3-Y(-)	J1-R(+)	100K min	7579--
80	J3-V(-)	J3-f(+)	100K min	7580--
81	J3-M(-)	J1-$\overline{P}$(+)	100K min	7581--
82	J3-S(-)	J3-N(+)	100K min	7582--

Table VI

Test Condition	Last Two Digits
Ambient	00
Transportation	01
Temperature	02

*The last two digits of the test code numbers are derived from the test conditions and associated digits shown in Table VI.

3.8 Insulation resistance. The insulation resistance between any listed point and all other listed points shorted together, as specified in Tables VII, VIII, IX and X shall be not less than 10 megohms when tested as specified in 4.4.2. Test voltage shall be 100 ± 5 volts dc (current shall be limited to 10 ma max).

3.8.1 Circuit card assembly board A (dwg 9272742).

Table VII

Hole Number:						
	A49	A86	A149	A194	A251	A317
	A58	A94	A154	A196	A262	A318
	A64	A121	A171	A202	A301	A327
	A68	A126	A179	A204	A302	A337
	A79	A128	A183	A246	A308	A342
		A146	A193	A250	A309	A344
						A348
						A383

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

3.8.2 Circuit card assembly board B (dwg 9272745).

Table VIII

Hole Number:								
	B3	B68	B134	B169	B194	B261	B307	B384
		B69	B137	B176	B199	B292	B316	B161
	B47	B77	B141	B188	B242	B293	B351	and
	B57	B94	B153	B191	B248	B298	B356	B162
	B59	B113	B154	B192	B249	B299	B362	
	B61		B167		B257	B306	B368	

3.8.3 Circuit card assembly: board C (dwg 9272748).

Table IX

Hole Number: C48, C56, C62, C74, C89, C98 and C103.

3.8.4 Completed interconnecting box: XM53 (dwg 8888408) (mounted on plate assembly part No. 5289073). NOTE: To preclude damage to diodes during this test, interconnecting wires within the test equipment corresponding to the following connector pins are required.

From	To
J3-h	J3-Y
J3-$\overline{M}$	J3-E
J3-f	J3-V
J3-$\overline{S}$	J3-N
J2-S	J2-H

Table X

J2-C, D, N, R, T, V, Z, c, e, g, i, E and Y.

J3-A, B, D, F, G, H, J, K, L, P, R, W, X, Z, a, b, c, d, e, g, k, m, q, r, w, y, z, AA, $\overline{EE}$, BB and p.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

3.9 Circuit impedance. The circuit impedance between the points specified in 3.9.1 and 3.9.2 shall be within the indicated value when tested as specified in 4.4.3. Tests shall be performed at 50 Kilohertz with a test signal not greater than 35 millivolts rms.

3.9.1 Circuit card assembly: board A (see dwg 9272742).

Table XI

Item	From Hole	To Terminal	Ohms Impedance	*Test Code (See 3.5 & Table VI)
1	A199	E5	8-0, +5	9101--
2	A294	E6	8-0, +5	9102--
3	A174	E8	8-0, +5	9103--

3.9.2 Circuit card assembly: board B (see dwg 9272745).

Table XII

Item	From Hole	To Terminal	Ohms Impedance	*Test Code (See 3.5 & Table VI)
1	B182	E111	8-0, +5	9201--
2	B331	E112	8-0, +5	9202--

3.10 Environmental testing (see 4.4.4).

3.10.1 Temperature shock. The IC Box mounted in the Case Carrying P/N 9285492 shall withstand 3 cycles of a temperature shock of 110 ± 5°F to -40 ± 5°F to 110 ± 5°F without evidence of physical damage (see 6.5) when tested as specified in 4.4.4.1.

3.10.2 Transportation vibration. The IC box packed according to dwg 9282823, shall withstand the vibration spectrum in Table XIII at room temperature for one minute along each of its three mutually perpendicular axes (see Figure 1) without evidence of physical damage (see 6.5). Testing shall be in accordance with 4.4.4.2.

Table XIII

Frequency (Hz)	Amplitude
2 - 10	1.0 inch da
10 - 100	5.0 g
100 - 500	1.0 g

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the currentversion before use.

3.11 Functional test. The IC box mounted to Plate Assembly P/N 9289073, and with 28 + 2 volts dc applied to pins J2-J(-) and J2-K(+), relays K1A and K1B shall operate. (Voltage source shall be limited to 0.2 amperes maximum). Test voltage shall be maintained during the performance of the testing specified in Table XIV - operated position. Circuit resistance in both the unoperated and operation position shall be in accordance with the requirements shown in Table XIV when tested as specified in 4.4.5.

Table XIV

Position	From	To	Resistance Ohms	*Test Code (See 3.5 & Table VI)
Unoperated	J2-A	J2-B	79.6K to 81.2K	1101--
	J2-E	J2-F	50 Meg Min	1102--
Operated	J2-A	J2-B	11.7 ± 0.4	1103--
	J2-E	J2-F	0.2 Max	1104--

3.12 Soldering. All soldering shall comply with the requirements of MIL-STD-1460.

3.13 Workmanship.

3.13.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.13.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.13.3 Burrs. Parts shall be free from burrs.

3.13.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.13.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

3.13.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:20Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 1 complete assembly (see dwg 8888408) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table XV. Tests shall be conducted in order specified in Table XV.

Table XV

First article inspection and tests

Inspection or Test	Dest	Non-Dest
1. Classification of characteristics/ defects (see 4.3.2.1)		X
2.*Circuit resistance (see 3.7)		X
3.*Insulation resistance (see 3.8)		X
4.*Circuit impedance (see 3.9)		X
5. Temperature shock (see 3.10.1)		X
6. Transportation vibration (see 3.10.2)	X	
7. Functional test (see 3.11)		X
8. Circuit resistance (see 3.7.5)		X
9. Insulation resistance (see 3.8.4)		X

*Performance of test requirements specified under 3.7.1, 3.7.2, 3.7.3, 3.7.4, 3.8.1, 3.8.2, 3.8.3 and 3.9 shall be accomplished prior to conformal coating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor defects/characteristics table (see Table XVI and Table XVII), and inspected for all defects/characteristics in the applicable classification. Any defects/characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of defects/characteristics in each classification need not be followed as long as all defects/characteristics inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

Table XVII
Minor Defects/Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of defects/characteristics (see 3.2). Critical, major and minor defects/characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Printed wiring board and terminal assemblies A, B and C (see dwgs 9272743, 9272746 and 9272749, as applicable, which form a part of dwg 8888408).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Objective evidence that materials are as specified (see 6.2)	Visual
102.	Terminals installed in proper holes and on proper side of board	Visual
103.	Terminal flange not in contact with printed circuit board for 360°	Visual
104.	Any terminal bent of broken	Visual
105.	Base material damaged in areas around terminals	Visual
106.	Soldering not in accordance with MIL-STD-1460	Visual
107.	Splits in swage at bottom of terminal not filled by solder fillet	Visual
Minor:		
201.	Evidence of poor workmanship (see 3.13)	Visual

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

4.3.2.1.2 Circuit card assemblies (see dwgs 9272742, 9272745, 9272748, as applicable, which form a part of dwg 8888408).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Any component missing	Visual
102.	Any component damaged	Visual
103.	Any component not in contact with board	Visual
104.	Any component placement improper	Visual
105.	Any relay improperly positioned	Visual
106.	Measling, crazing or blistering of base material of board	Visual
107.	Conductor peeled or lifted from base material	Visual
108.	Soldering not in accordance with MIL-STD-1460	Visual
109.	Objective evidence that materials are as specified (see 6.2)	Visual
110.	Diode assembled to board incorrectly	Visual
111.	Fuze switch assembled to board incorrectly	Visual
112.	Fuse switch insulation tape missing or incorrectly installed	Visual
Minor:		
201.	Evidence of poor workmanship (see 3.13)	Visual

4.3.2.1.3 Interconnecting box: (prior to soldering interdeck wires to circuit card assemblies boards A and B) (see dwg 8888408).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Objective evidence that materials are as specified (see 6.2)	Visual
102.	Circuit card assembly improperly positioned	Visual
103.	Any spacer missing	Visual
104.	Assembly hardware improperly torqued	Visual/Gage
Minor:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:20Z
Check the source to verify that this is the current version before use.

4.3.2.1.4 Interconnecting box (after soldering interdeck wires to circuit card assemblies, boards A and B; and prior to assembling circuit card assembly, board C) (see dwg 8888408).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Soldering improper (see 3.12)	Visual
	102. Any interdeck wire missing, bent or improperly positioned	Visual
Minor:	None defined.	

4.3.2.1.5 Interconnecting box (after assembling circuit card assembly; board C to boards A and B; and prior to application of insulation compound) (see dwg 8888408).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Objective evidence that materials are as specified (see 6.2)	Visual
	102. Circuit card assembly improperly positioned	Visual
	103. Any component damaged or missing	Visual
Minor:	None defined.	

4.3.2.1.6 Interconnecting box (after application and cure of electrical insulating compound: and prior to assembly of flexible cables) (see dwg 8888408).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Objective evidence that materials are as specified (see 6.2)	Visual
	102. All specified surfaces not completely covered with electrical insulating compound	Visual

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

103.	Electrical insulating compound on any printed circuit pin, screw, washer, nut or spacer mounting surface	Visual
104.	Evidence of damage to any component due to unauthorized removal of electrical insulating compound or any other cause	Visual
105.	Foreign material imbedded in electrical insulating compound	Visual
106.	Electrical insulating compound not properly cured	Visual
107.	Cables formed incorrectly	Visual
108.	Formed radii on cables (cover layer, base layer or copper) cracked, creased, wrinkled or delaminated	Visual

Minor: None defined.

4.3.2.1.7 Interconnecting box (after assembly to plate assembly 9289073) (see dwg 8888408).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Objective evidence that materials are as specified (see 6.2)	Visual
102.	Any flexible cable improperly positioned	Visual
103.	Any component damaged or missing	Visual
104.	Soldering improper (see 3.12)	Visual
105.	Marking missing or improper	Visual
106.	Connector nuts improperly torqued (4 places)	Gage
107.	Self locking nuts improperly torqued (7 places)	Gage
108.	Serialization improper or missing (see 3.4)	Visual
Minor:		
201.	Evidence of poor workmanship (see 3.13)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

4.3.2.1.8 Preparation for delivery (see 5).

Categories	Defects/Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Preservation, packing, and packaging not in accordance with dwgs 9282823 and 9293213	Visual
102.	Marking not in accordance with dwgs 9282823 and 9293213	Visual
Minor:		
201.	Evidence of poor workmanship (see 3.13)	Visual

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. *Circuit resistance	Major
b. *Circuit impedance	Major
c. *Insulation resistance	Major
d. Insulation resistance	Major
e. Functional test	Major
f. Circuit resistance	Major

*Prior to conformal coating.

None of these tests are considered destructive and samples so tested may be returned to the lot.

4.3.3.1 Circuit resistance, circuit impedance, insulation resistance, and functional test. Each interconnecting box shall be tested in accordance with 4.4.1, 4.4.3, 4.4.2 and 4.4.5. If any item fails to comply with 3.7, 3.9, 3.8 and 3.11, the item shall be rejected and removed from the lot.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major defects/characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8888408). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

4.3.4.2 Minor defects/characteristics and tests. Acceptance inspection equipment for minor defects/characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Circuit resistance. The circuit resistance shall be measured in accordance with Tables I, II, III, IV, and V with approved measuring equipment. Requirements shall be as specified in 3.7.

4.4.2 Insulation resistance. The insulation resistance shall be measured with approved insulation resistance measuring equipment in accordance with Tables VII, VIII, IX, and X. Requirements shall be as specified in 3.8.

4.4.3 Circuit impedance. The circuit impedance shall be measured in accordance with Tables XI and XII with approved measuring equipment. Requirements shall be as specified in 3.9.

4.4.4 Environmental testing (see 3.10).

4.4.4.1 Temperature shock. The IC box, in its case carrying part number 9285492, shall be placed in a test chamber stabilized (see 6.4) at 110 + 5°F and maintained for a minimum of 4 hours. The test item shall be removed from the high temperature chamber and, within three minutes, placed in a test chamber stabilized (see 6.4) at -40 + 5°F and maintained for a minimum of 4 hours. At the conclusion of this time period, and within three minutes return the test item to the high temperature chamber. This sequence constitutes one cycle. Three consecutive cycles shall be executed. At the conclusion of the third cycle, hold the test item in the test chamber stabilized at 110 + 5°F for a minimum of four hours then remove the test item from the test chamber and allow to return to ambient conditions without forced cooling. After this test, remove plate assembly and IC box from carrying case. Test IC box in accordance with 4.4.1, Table V and 4.4.2, Table X. Upon completion of electrical tests, visually inspect IC box for damage. Requirements shall be as specified in 3.10.1.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:20Z
Check the source to verify that this is the current version before use.

4.4.4.2 Transportation vibration. The IC box packed in accordance with drawing No. 9282823 and 9293213 shall be securely mounted to a fixture which is capable of being positioned readily in each of three mutually perpendicular axes. The test item and fixture shall be secured to an approved vibration machine and shall be vibrated over the frequency ranges as defined in Table XIII. After this test remove plate assembly and IC box from packing box and fixture. Test IC box in accordance with 4.4.1, Table V and 4.4.2, Table X. Upon completion of electrical tests, visually inspect IC box for damage. Requirements shall be as specified in 3.10.2.

4.4.5 Functional test. The functional test shall be performed in accordance with Table XIV utilizing approved test equipment. Requirements shall be as specified in 3.11.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The interconnecting box shall be packaged in accordance with dwgs 9282823 and 9293213 using the specified moisture barrier.

5.1.2 Level C. The interconnecting box shall be packaged in accordance with dwgs 9282823 and 9293213 except that the moisture barrier may be omitted.

5.2 Packing.

5.2.1 Level A and C. The interconnecting box shall be packed in accordance with dwg 9282823 and 9293213.

5.3 Marking. Marking shall be as specified in accordance with dwgs 9282823 and 9293213.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 3.5 and 4.3.2.1). Data specified in 3.5 and 4.3.2.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:20Z
Check the source to verify that this is the current version before use.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAN-I, Dover, New Jersey 07801.

6.4 Temperature stabilization. The temperature is considered stabilized when the greatest peaks (both highest and lowest) continually observed over 5 minutes min. do not exceed the nominal temperature plus tolerance specified.

6.5 Physical damage. Physical damage shall include, but not be limited to bent or loose pins, split or cracked insulation or printed circuit boards and cables, broken or cracked conductors, and damaged connectors or threads.


6.6 Supersession data. This specification supersedes the requirements of Purchase Description PA-PD-2232A dated 16 September 1974, SCN No. 1 dated 17 September 1974, and SCN No. 2 dated 7 October 1974.

Custodian:
Army - AR

Preparing activity:
Army - AR

Project No. 1135-A224

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:20Z
Check the source to verify that this is the current version before use.

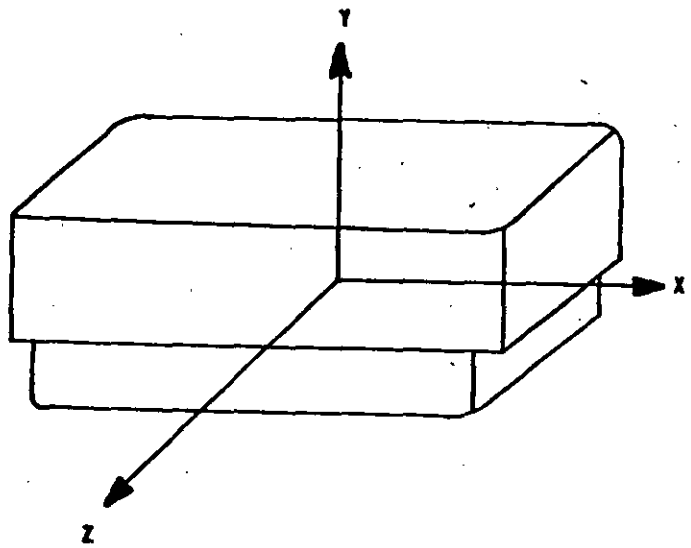

AXES OF THE HOLDING FRAME CONTAINING THE INTERCONNECTING BOX

Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-22T20:20Z
Check the source to verify that this is the current version before use.