MILITARY SPECIFICATION

MINE, ANTI-PERSONNEL: HE, BLU-92/B LOADING, ASSEMBLING AND PACKING

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This Specification contains requirements not normally covered by the drawings, and provides quality assurance provisions for the loading, assembling and packing for one type of mine designated as Mine, Anti-Personnel: H13, BLU-92/B, used in CBU-78/B and CBU-89/B Dispensers.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification For.

AMSC N/A
FSC 1345
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-331	-	Fuze and Fuze components, Environmental and Performance Tests For.
MIL-STD-1235	-	Single and Multi-Level Continuous Sampling Procedures and Tables for Inspection by Attributes.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (See 6.7)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

PRODUCT DRAWINGS

9292710	Mine, Anti-Personnel: HE, BLU-92/B
9292730	Electronic Assembly Timing Operation, Oscillator Periods and Low Voltage Detection Levels (U)

INSPECTION EQUIPMENT DRAWINGS

9334065		Test Mine Assembly
1183AS616	-	Standard Wave Forms

(Copies of specifications, standards, handbooks, drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D792 "Specific Gravity and Density of Plastics by Displacement", Method A-1.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street Philadelphia, PA, 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards) , the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. Materials shall be in accordance with the applicable drawing, specifications and standards.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing (Dwg. 9292710) and all associated drawings and with all requirements specified in applicable specifications and standards.

3.3 Pretest of main charge explosive. Each lot of Composition B4 explosive used to load the case assembly to make the Kill Mechanism (Dwg. 9292638) shall be qualified prior to use in production. The HE explosive fill, when initiated by normal production booster pellets, shall produce high order detonation as evidenced by high degree of fragmentation of the Case Assembly (Dwg. 9292639) (See 4.5.2).

3.4 HE explosive exudation. The completely assembled Kill Mechanism (Dwg. 9292638) with loading holes facing down shall not exude externally when subjected to a temperature of 160° + 5°F for a period of twenty-four (24) hours (See 4.5.3).

3.5 Verification of safe condition of body assembly. Prior to assembly of explosive leads and closure plug, positive verification of safe condition of each body assembly shall be performed to assure the following:

a. Both battery cells are not activated (See Table II).
b. Firing Capacitor is shorted by shorting bar (See Table II).
c. S&A slider assembly is in safe position (distance from end of S&A to slider assembly, max) (See Dwg. 9328743).
d. Borerider not functioned (distance from end of sleeve to end of borerider) (see Dwg. 9328743).

Verification shall be performed as specified in 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

3.6 Verification of body assembly circuit resistance. Prior to assembly of explosive leads, circuit resistance checks of each Body Assembly (Dwg. 9292713) shall be performed to verify that all tripline, receiver coil, pressure cartridge; S&A piston actuator and S&A detonator circuits meet the resistance values listed in Table II. Verification shall be performed as specified in 4.5.5.

3.7 Anti-disturbance (AD) mode functioning. The mine shall function high order, as evidenced by a high degree of fragmentation of the case assembly, when subjected to the following conditions:

Initiated by a device simulating the electromagnetic pulse feature of the CBU-89/B and CBU-78/B Dispensers (See 4.4.5).

b. After the enable time has occurred, the mine shall be disturbed by tilting, rotating, jarring or any other tampering possible (See 4.5.6).

The mine shall not arm or detonate prematurely (See 4.5.6.2).

3.8 Documentation of plan for safety in handling and processing of munitions. Prior to loading, the contractor shall document a detailed plan of the procedures to be employed during handling of the munition. This documentation shall describe, as a minimum, the procedures to be employed to assure that the temperature of the mine assemblies does not exceed 165°F at any time during processing or storage and in such instances the time at 165°F shall not exceed one (1) hour unless otherwise specified in this specification. In no case shall continuous storage of the items be at a temperature above 100°F for a period exceeding 30 days.

Submission of the plan shall be in accordance with data item description DI-T-5372 (tailored).

3.9 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.10 Data requirement. The contractor shall generate data in accordance with the requirements of the data item description cited in paragraph 6.8.

3.11 Workmanship. All parts and assemblies shall be fabricated, loaded and assembled in a thorough workmanlike manner . All parts and assemblies shall be clean, free of burrs, sharp edges, cracks, dirt, grease, rust, and other foreign matter that may impair proper functioning. The cleaning method used shall not be injurious to any part, nor shall the parts be contaminated by-the cleaning-agent(s). Exterior surface coating shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat and sharply defined.

Source: https://assist.dla.mil -- Downloaded: 202640-23T02:55Z
Check the source to verify that this is the current version before use.

4* QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The following types of inspections shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer in accordance with the provisions of 4.3.2. The first article sample shall consist of the items and sample quantities specified in Table I

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63456A (AR)

PARAGRAPH	TITLE: Mine, Antipersonnel: HE, BLU-92/B		SHEET 1 OF 1		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Pellet, Booster (Dwg. 9292604)				
	Examination for Defects	5		3.2	4.4.2.1
	Kill Mechanism (Dwg. 9292638)				
	Examination for Defects	10		3.2	4.4.2.2
	Pretest of Main Charge Explosive	5		3.3	4.5.2
	HE Exudation Test	5		3.4	4.5.3
	Mine, Assembly (Dwg. 9292711)				
	Examination for Defects	12		3.2	4.4.2.4
	Mine, Antipersonnel: HE, BLU-92/B (Dwg. 9292710)				
	Examination for Defects	12		3.2	4.4.2.5
	Anti-Disturbance Functioning	12		3.7	4.4.2.6/4.5.6

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of mines shall contain:

a. Metal parts assemblies of one lot interfix number from one manufacturer.
b. Body Assemblies (Dwg 9292713) from one lot interfix number from one manufacturer.
c. Explosive Composition B4 Type I from one lot interfix number from one manufacturer.
d. Booster Pellets (Dwg 9292604) from one explosive lot interfix number from one manufacturer.
e. PA509 Explosive Leads (Dwg 9292601) from one lot interfix number from one manufacturer.

Maximum lot size shall be no more than one (1) month production (30 calendar day period).

4.4.2 Examination. See MIL-A-48078 herein.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63456A (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Pellet, Booster	1 OF 1	9292604
			NEXT HIGHER ASSEMBLY 9292711

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length	(a)		3.2	Gage
102	Diameter	(a)		3.2	Gage
103	Cracks or laminations	(a)		3.2	Visual
104	Weight	(a)		3.2	Balance
105	Density (when required, see Note 6 of dwg.)	(a)		3.2	4.5.1
Minor					
201	Poor workmanship	(a)	0.65%	3.11	Visual

NOTES:

(a) See 4.4.3.1 for sampling plan.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9292638
4.4.2.2	Kill Mechanism				NEXT HIGHER ASSEMBLY 9292711
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
	After assembly of Sleeves and Plugs				
1	Explosive on exposed surfaces		100%	3.2	Visual
Major					
	Prior to assembly of Sleeves and Plugs				
101	Cavity depth, min., 2 places		0.40%	3.2	Gage
102	Explosive weight, min.		0.40%	3.2	Scale
	After assembly of Sleeves and Plugs				
103	Cement between sleeves and plugs missing		0.40%	3.2	Visual
104	Plug improperly assembled, 2 places		0.40%	3.2	Visual
105	Sleeve improperly oriented or not seated, 2 plcs		0.40%	3.2	Gage
106	Pretest of Composition B4 Explosive 1/, 3/	5	0-1	3.3	4.5.2
107	Exudation Test. 2/, 3/	5	0-1	3.4	4.5.3
Minor					
	After assembly of Sleeves and Plugs				
201	Poor workmanship		0.65%	3.11	Visual

NOTES: 1/ Sample of five (5) Kill Mechanisms per lot of Comp. B4: For Qualification of lot.
2/ Sample of five (5) Kill Mechanisms per lot of Kill Mechanisms.
3/ Data item description DI-R-1724 applies for the tests. Submit each time test is performed.

Source: https://assist.dla.mil -- Downloaded: 202640-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63456A (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Loaded Body Assembly		9292712
			NEXT HIGHER ASSEMBLY 9292711

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
	Prior to assy of Explosive Leads & Closure Plug				
1	Distance from end of S&A to slider assy, max. 1/		100%	3.5	4.5.4
2	Resistance across shorted Firing Capacitor 1/		100%	3.5	4.5.4
Major					
	Prior to assy of Explosive Leads				
101	Resistance of Tripline Sensors, max, 4 places		100%	3.6	4.5.5
102	Resistance of Receiver Coil Circuit		100%	3.6	4.5.5
103	Resistance of Pressure Cartridge		100%	3.6	4.5.5
104	Resistance of Piston Actuator		100%	3.6	4.5.5
105	Resistance of Detonator		100%	3.6	4.5.5
106	Unactivated cell voltage, max, 2 places		100%	3.5	4.5.4
	After assy of Explosive Leads & Closure Plug				
107	Any Explosive Lead(s) missing or improperly assembled (loose or green end not visible)		0.40%	3.2	Visual/Manual
108	Any Lead Retainer(s) missing or improperly assembled		0.40%	3.2	Visual
109	Closure Plug missing or not flush to below flush		0.40%	3.2	Visual
Minor					
	After assy of Explosive Leads & Closure Plug				
201	Poor workmanship		0.65%	3.11	Visual

NOTES:
1. Data item description DI-R-1721 applies to the Critical Defects - supply report whenever defects are found.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-23T02:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63456A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Mine Assembly				9292711
					NEXT HIGHER ASSEMBLY 9292710
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
	During assy of Body Assembly				
101	Any Booster Pellet(s) missing		0.40%	3.2	Visual
102	Any Booster Pellet retaining tape missing or improperly installed		0.40%	3.2	Visual
103	Preform packing (O-Ring) missing or not greased (2 places)		0.40%	3.2	Visual
	After completed Mine Assembly				
104	Any cover loose		0.40%	3.2	Visual/Manual
105	Crimp improper, both sides of mine		0.40%	3.2	Visual
106	Overall diameter, max		0.40%	3.2	Gage
107	Overall height, max		100%	3.2	Gage
Minor					
201	Paint damaged or incomplete		0.65%	3.2	Visual
202	Poor workmanship		0.65%	3.11	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Mine, Antipersonnel: BLU-92/B				9292710
					NEXT HIGHER ASSEMBLY ---
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Borerider min. dim		100%	3.2	Gage
102	Width, max		0.40%	3.2	Gage
103	Length, max		0.40%	3.2	Gage
104	Height, max		0.40%	3.2	Gage
105	Primer missing or incorrect		0.40%	3.2	Visual/Manual
106	Aeroballistic seal missing or incorrectly applied		0.40%	3.2	Visual
107	Location of mine in housing (detail A)		100%	3.2	Gage
108	Location of borerider to datum -A-		100%	3.2	Gage
109	Borerider located incorrectly with respect to mine center line		100%	3.2	Visual
Minor					
201	Rivet(s) missing or incorrect		0.65%	3.2	Visual
202	Distance from housing to fastener (2 places)		0.65%	3.2	Gage
203	Poor workmanship		0.65%	3.11	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Mine, Antipersonnel: HE, BLU-92/B	1 OF 1	9292710
			NEXT HIGHER ASSEMBLY: ---

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD

LOT ACCEPTANCE TEST (AMBIENT)

Mine Assy Insp Lot	3/ Sample Size	AD Mode	1/ Premature Army Detonation		2/ Early SD	Low Order Function/ Failure to Function	Rqmts	Test Method
0-1200	21	21	0-1	0-1	2-3	1-2	3.7	4.4.3.2/ 4.5.6
1201-3200	33	33	0-1	0-1	3-4	1-2	3.7	4.4.3.2/ 4.5.6
3201-10,000	51	51	0-1	0-1	5-6	2-3	3.7	4.4.3.2/ 4.5.6

NOTES:
1/ Premature arming and detonation is defined in 4.5.6.2. CRITICAL.
2/ Early self destruct (SD) is defined in 4.5.6.2.
3/ The sample shall be divided into three groups for conditioning at hot, cold, and ambient (4.4.3.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

4. 4.3 Testing

4. 4.3.1 Dimensional and weight control of booster pellet (See Dwg . 9292604). The dimensions and weight specified in paragraph 4.4.2.1 for the booster pellets shall be checked by randomly selecting three (3) samples from the quantity produced by each press during a period not to exceed four (4) hours. The quantity represented by the samples shall be identified and not used in production until the dimensional and weight inspections are completed. If any sample fails to comply with the dimensional requirements, the quantity of parts represented by the sample shall be subjected to 100% inspection. If any sample meets the dimensional requirements but fails to comply with the applicable weight requirement? its density shall be determined as specified in 4.5.1. The above inspection shall also be performed each time a new lot of explosive material is used.

4.4.3.2 Lot acceptance testing. The lot acceptance test sample be subjected to:

a. Transportation Vibration (TV) in accordance with MIL-STD-331, Test No. 119, Procedure 2 (without borerider clip installed) .

b. Temperature conditioning (after TV and without borerider clip installed) for a minimum of 4 hrs. at hot (145° +5°F), ambient (70° +lO°F) , and cold (minus 40° -5°F) .

c. The preconditioned test units shall have the borerider pin and retaining clip installed and functioned per 4.4.2.6, prevailing ambient.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1. The contractor shall submit inspection equipment designs to the Government for approval in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and 6.3 herein.

4.4.5 Launch simulator. An air gun shall be used as a launcher for lot acceptance testing. Design to be submitted in accordance with 6.3. The air gun shall have the following features:

a. Impart sufficient velocity to the mines to provide impacts of 150 + 6.0 feet per second (fps).

b. Provide for borerider release after ejection from the muzzle but prior to impact, (launch with borerider pin and borerider clip installed).

c. Provide the interface with the SD setter to initiate the mine prior to/at launch.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T02:55Z
Check the source to verify that this is the current version before use.

4. 4.5.1 Impact medium. The impact or target material will consist of three (3) 1.5 inch thick particle boards (clipboard), with a density of 30 ± 2 pounds per cubic foot, with a 1/2 in. thick steel back-up plate.

4.4.5.2 SD setter. The SD setter shall provide the MCD signal necessary to initiate and set the proper SD time into the mine. The signals necessary to perform this function are contained on Drawing 1183AS616, Standard Waveform. Design to be submitted in accordance with 6.3.

4.5 Test methods and procedures

4.5.1 Density of booster pellet. Density of the booster pellet, when required - See 4.4.3.1 and Dwg. 9292604, shall be performed in accordance with the procedure specified in ASTM D792 "Specific Gravity and Density of Plastics of Displacement", Method A-1. The contractor may use alternate procedures than that specified herein, subject to the approval of the Government. If the sample of pellets from 4.4.3.1 fails to comply with the density requirements, the quantity of parts represented by the sample shall be subjected to 100% weight inspection, (Non-destructive inspection)

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:55Z
Check the source to verify that this is the current version before use.

TABLE II

Body Assembly Electrical Checks
Prior to Loading


Electrical Check	Test Points	Requirements 2/, 3/
1. Short Across Firng Capacitor	13 - 8	0.2 - 0.7 ohms
2. inactivated Battery	18 - 8	0.005 volts max X
3.	10 - 18	
4* Tripline Resistance (1$7)	3 - 8	6.0 ohms max
5. Tripline Resistance (2&6)	4 - 8	6.0 ohms max
6. Tripline Resistance (3&8)	1 - 8	6.0 ohms max
7. Tripline Resistance (4&5)	2 - 8	6.0 ohms max
8. Receiver Coil Resistance 1/	5 - 8	0.85 - 1.4 ohms
9. Pressure Cartridge Resistance	19 - 8	2.0 - 6.0 ohms
10. Piston Actuator Resistance	20 - 8	4.0 - 9.5 ohms
11. Detonator Resistance	17 - 8	3.0 - 7.5 ohms


1/ The Receiver Coil is in para;;e; with a series connected shorting bar and Electric Battery Primer.

2/ For voltage ckecks, use a voltmeter with a 10 megohm input impedance.

3/ For resistance checks, use a milliohmmeter having a short circuit current of 1 ma or less e.g. Valhalla or equivalent.

TEST POINT LAYOUT (Dwg. . 9292713)

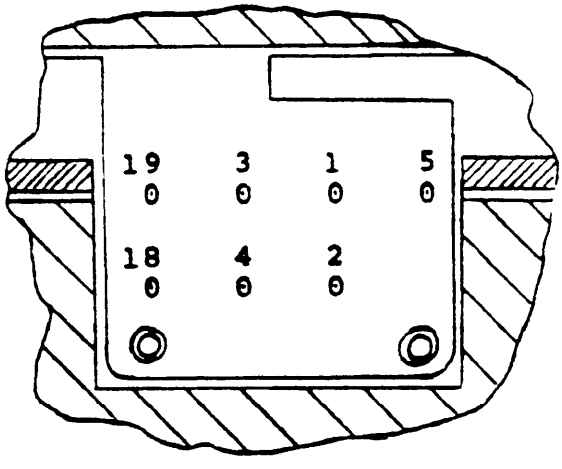

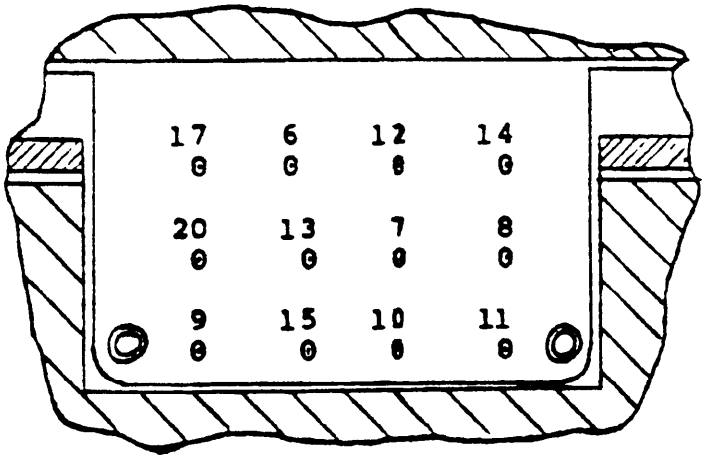

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

4.5.2 Pretest of Composition B4 type 1 explosive. Each lot of explosive used to manufacture the Kill Mechanism (Dwg 9292638) shall be tested prior to use in production in accordance with the following:

a. Test Mine Assembly, Dwg. 9334065 shall be the test vehicle .

b. Five (5) Test Mine Samples, with case assemblies filled with Composition B4 Type 1 shall be used in qualification of the explosive lot.

c. Each sample mine shall be marked with the weight of the kill mechanism and lot number of the explosive.

d. Normal production S&A explosive leads (PA 517) , explosive leads (PA 509) and booster pellets shall be used in sample mines.

e. The sample mines shall be functioned in a test pit or inclosure for containing debris for later evaluation and determination of order of detonation of H.E. charge.

f. Observation shall be made for compliance with requirements of 3.3. Failure of any sample shall reject the lot. Any Kill Mechanism which fails to function due to initiator, explosive leads (PA 517) , explosive leads (PA 509) or booster pellets shall be considered a no test and a replacement test mine shall be tested in its place.

Results of test shall be supplied in accordance with 6.4.

4.5.3 HE explosive exudation test. A sample of five (5) Kill Mechanism, Dwg. 9292638, with loading holes facing down shall be placed in conditioning chamber and subjected to a temperature of 160° + 5°F for a period of twenty-four (24) hours. Observation shall be made for compliance with requirement of 3.4. Any failure shall reject the lot of kill mechanisms. (Destructive test) Results of test shall be supplied in accordance with 6.4.

4.5.4 Verification of safe condition of body assembly. Prior to assembly of explosive leads and closure plug, positive verification of each Body Assembly shall be performed. A ten (10) megohm input impedance voltmeter shall be used to test battery cells and a milliohmmeter having a test current of one milliamp or less shall be used to test short across capacitor. A flush pin gage shall be used to measure safe position of slider assembly, and borerider.

Observation shall be made for compliance with requirements of 3.5. Any Body Assembly failing any requirement shall be classed defective and removed from the lot. (Non-destructive tests)

4.5.5 Verification of body assembly circuit resistance. Prior to assembly of explosive leads, resistance checks of each Body Assembly shall be made for all triplines, receiver coil, pressure cartridge, S&A piston acutator and S&A detonator circuits. A milliohmeter having a test current of one

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:55Z
Check the source to verify that this is the current version before use.

mini amp or less shall be used. Observation shall be made for conformance with requirement of 3.6. Any Body Assembly failing a requirement shall be classed defective and removed from the lot. (Non-destructive tests)

4.5.6 Anti-disturbance (AD) functioning test. Final acceptance of each lot of loaded mines shall consist of initiating/arming a sample of tactical mines utilizing the launch simulator as specified in 4.4.5. The mines shall be set for the minimum SD time (See 4.4.5.2) . Recording equipment shall be used to determine the time of test events of each mine. The starting time for test events shall begin at the application of the electromagnetic pulse. All mines shall be serialized before the launch and their location noted to insure that the correct times are recorded for each mine. After initiation and the lapse of enable time plus one (1) hour minimum, the mines shall be activated by tilting, rotating, jarring or any other tampering possible to cause mines to function in the intended AD Mode. If a mine fails to function, it shall be classed defective and destroyed in place.

NOTE : Enable time is defined as the maximum GROUP A electronic arm time specified on Dwg 9292730 after application of electromagnetic pulse.

4.5.6.1 Recording of data. A record, by serial number, shall be made for each mine tested and shall include the following:

a. Time to premature detonation (See 4.5.6.2).
b. Time to micropiston actuator function.
c. Number of triplines deployed (If feasible).
d. Time to early self destruct (See 4.5.6.2).
e. Time to AD functioning.
f. Degree of fragmentation/Order of detonation.

Lot acceptance test results for each inspection lot shall be forwarded to the addressee specified in 6.4.

4.5.6.2 Premature arming; premature detonation; early self ‘ destruct. For purposes of this test, the following terms are defined:

a. Premature arming is defined as arming of the S&A assy (evidenced by actuation of piston actuator) before the minimum S&A arming time specified on Dwg. 9292730.
b. Premature detonation is defined as detonation of the mine (S&A armed) occuring before the minimum electronic arm time specified on Dwg. 9292730*
c. Early self destruct is defined as detonation of the mine (S&A armed) occuring at or after the minimum electronic arm time specified on Dwg. 9292730, but before being functioned by A.D.

Source: https://assist.dla.mil -- Downloaded: 202640-23T02:55Z
Check the source to verify that this is the currentversion before use.

5. PACKAGING

5.1 Packaging requirements. The only packaging requirements that are required is for intraplant storage prior to loading, assembling and packing of the CBU-78/B and CBU-89/B Dispensers.

6. NOTES

6.1 Intended use. The Mine, Antipersonnel: HE, BLU-92/B covered by this specification is intended for use as an antipersonnel mine dispensed from Dispensers CBU-89/B and CBU-78/B.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. See MIL-A-48078. Submit equipment designs as required to Commander, U.S Army Armament Research, Development and Engineering Center, AMSMC-QAT-I (D), Picatinny Arsenal, New Jersey 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 listed in 6.8 will apply.

6.4 Submission of results from contractor conducted examinations and tests. Unless otherwise specified by the Contracting Officer, the contractor shall forward requested records of examinations and tests to Commander, ARDEC, ATTN: AMSMC-QAT-M (D) , Picatinny Arsenal, New Jersey 07806-5000. Data Item DI-R-1724 listed in 6.8 will apply.

6.5 Distribution of ammunition data cards. Distribution off data cards shall include the following: Commander, ARDEC, ATTN: AMSMC-QAT-M (D) , Picatinny Arsenal, New Jersey 07806-5000. Data Item DI-MISC-80043 listed in 6.8 will apply.

6.6 Submission of procedures. Submission or procedures specified in 3.8 shall be addressed to Commander, ARDEC, ATTN: AMSMC-QAT-M (D), Picatinny Arsenal, New Jersey 07806-5000. Data Item DI-T-5372 (tailored) listed in 6.8 will apply.

6.7 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as, ARRADCOM, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal, or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 202640-23T02:55Z
Check the source to verify that this is the currentversion before use.

6.8 Data requirements. Deliverable data required by the specification is cited in the following paragraphs:

Paragraph	Data Requirements	Applicable DID
3.8, 6.6	Safety Plans	DI-T-5372 (Tailored)
6.3	Inspection Equipment Designs	DI-R-1714
4.4.2.3 6.4	Quality Inspection Defects Reports (Criticals only)	DI-R-1721
4.4.2.2 6.4	Quality Inspection Test, Demonstration & Evaluation Report	DI-R-1724
6.5	Ammunition Data Card	DI-MISC-80043

6.9 Changes from previous issue. Due to extensiveness of the changes, asterisks to identify changes with respect to the previous issue are not used in this revision.

6.10 Subject term (key word) listing.

Mine
Anti-personnel
BLU 92/B
Anti-disturbance
Triplines
Launch Simulator
Explosive

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1345-M97)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

MINE, ANTI-PERSONNEL: TEST BLU 92/B (AP-40) ASSEMBLING AND PACKING

10. SCOPE

10.1 This appendix details the quality assurance provisions for loading, assembling and packing of one type of mine designated as Test Mine, BLU 92/B (AP-40) used in CBU 78/B and CBU 89/B Test Dispensers. This appendix is a mandatory part of this specification, the information contained herein is intended for compliance.

10.2 Unless otherwise specified herein the requirements for Test Mine, BLU 92/B (AP-40) sub-assemblies are identical to the requirements for Body Assembly/Body Assembly 9292713 and Mine Assembly/Mine, Anti-Personnel: HE, BLU 92/B contained in this specification. Each paragraph in the specification for the HE Mine is included in this appendix to indicate its applicability to the Test Mine.

20. APPLICABLE DOCUMENTS

20.1 Government documents.

20.1.1 Specifications and standards.

This paragraph is applicable to this appendix. (Applicable)

20.1.2 Other government documents, drawngs, and publications. Applicable with the substitution of the following PRODUCTION and INSPECTION EQUIPMENT DRAWINGS.

DRAWINGS (See 60.7)

US ARMY ARMAMENTS RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

PRODUCT DRAWINGS

9347080	- Test Mine, BLU 92/B (AP-40)
9292730	- Electronic Assembly Timing Operation, Oscillator Periods and Low Voltage Detection Levels (U)

INSPECTION EQUIPMENT DRAWINGS

1183AS616	- Standard Wave Forms

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

20.2 Other Publications. Applicable.

20.3 Order of precedence. Applicable.

30. REQUIREMENTS

30.1 Material. Applicable.

30.2 Components and assemblies. This paragraph is applicable except that Dwg. 9292710 is replaced by Dwg. 9347080.

30.3 Pretest of main charge explosive. This paragraph is not applicable to this appendix (not applicable).

30.4 HE explosive exudation. Not applicable.

30.5 Verification of safe condition of body assembly. Applicable.

30.6 Verification of body assembly circuit resistance. Applicable.

30.7 Anti-disturbance (AD) mode functioning. Applicable.

30.8 Documentation of plan for safety in handling and processing of munitions. Applicable.

Additionally, this plan shall include the procedures that will be used to assure total segregation of the Test BLU 92 (AP-40) from the Tactical BLU 92/B and special test configurations.

30.9 First article inspection. Applicable.

30.10 Data requirements. Applicable.

30.11 Workmanship. Applicable.

30.12 Verification of inert fill. Each Inert Kill Mechanism (Dwg. 9347082) and Mine BLU 92/B (AP-40) (Dwg. 9347080) shall be examined to verify that it is inert loaded.

40. QUALITY ASSURANCE PROVISIONS

40.1 Responsibility for inspection. Applicable.

40.1.1 Responsibility for compliance. Applicable.

40.2 Classification of inspections. Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

40.3 First article inspection. Applicable.

40.3.1 Submission. Applicable, with Table I herein.

40.3.2 Inspections to be performed. Applicable, with Table I herein.

40.3.3 Rejection. Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE: Test Mine, BLU 92/B (AP-40)		SHEET 1 OF 1		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Kill Mechanism, Inert (BLU 92/B) (Dwg. 9347082)				
	Examination for Defects	10		30.2	40.4.2.2
	Mine, Assembly, Practice (Dwg. 9347081)				
	Examination for Defects	12		30.2	40.4.2.4
	Test Mine, BLU 92/B (AP-40) (Dwg. 9347080)				
	Examination for Defects	12		30.2	40.4.2.5
	Anti-Disturbance Functioning	12		30.7	40.4.2.6/40.5.6

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

40.4 Quality conformance inspection. Applicable.

40.4.1 Inspection lot formation. This paragraph is applicable except for subparagraphs c, d and e which are NOT applicable.

40.4.2 Examination. Applicable.

40.4.2.1 Pellet, Booster. Not applicable, and not included herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
40.4.2.2	Kill Mechanism, Inert (BLU 92/B)	1	1	9347082
				NEXT HIGHER ASSEMBLY: 9347081

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	After assembly of Tape				
1	Lead shot not present		100%	30.12	Radiograph
Major	Prior to assembly of Tape				
101	Cavity depth, min., 2 places		0.40%	30.2	Gage
102	Filler weight min.		0.40%	30.2	Scale
	After assembly of Tape				
103	Tape missing, 2 places		0.40%	30.2	Visual
Minor	After assembly of Tape				
201	Evidence of poor workmanship		0.65%	30.11	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
40.4.2.3	Loaded Body Assembly, Practice				9347085
					NEXT HIGHER ASSEMBLY 9347081
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
	Prior to assy of Dummy Leads & Closure Plug				
1	Distance from end of S&A to slider assy, max.		100%	30.5	40.5.4
2	Resistance across shorted Firing Capacitor		100%	30.5	40.5.4
Major					
	Prior to assy of Dummy Leads				
101	Resistance of Tripline Sensors, max. 4 places		100%	30.6	40.5.5
102	Resistance of Receiver Coil Circuit		100%	30.6	40.5.5
103	Resistance of Pressure Cartridge		100%	30.6	40.5.5
104	Resistance of Piston Actuator		100%	30.6	40.5.5
105	Resistance of Detonator		100%	30.6	40.5.5
106	Unactivated cell voltage, max, 2 places		100%	30.5	40.5.4
	After assy of Dummy Leads & Closure Plug				
107	Any Dummy Lead(s) missing or improperly assembled (loose)		0.40%	30.2	Visual/Manual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 202640-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
40.4.2.3	Loaded Body Assembly, Practice				9347085
					NEXT HIGHER ASSEMBLY 9347081
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
108	Any Lead Retainer(s) missing or improperly assembled		0.40%	30.2	Visual
109	Closure Plug missing or not flush to below flush		0.40%	30.2	Visual
Minor					
	After assy of Dummy Leads & Closure Plug				
201	Evidence of poor workmanship		0.65%	30.11	Visual

NOTES: 1. Data item description DI-R-1721 applies to the Critical Defects - supply report whenever defects are found.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-M-63456A(AR)
APPENDIX A

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
40.4.2.4	Mine Assembly, Practice				9347081
					NEXT HIGHER ASSEMBLY 9347080
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
	Prior to assy of Body Assembly				
101	Preform packing (O-Ring) missing or not greased (Upper Housing Assy end)		0.40%	30.2	Visual
	After completed Mine Assembly				
102	Any cover loose		0.40%	30.2	Visual/Manual
103	Crimp improper, both sides of mine		0.40%	30.2	Visual
104	Overall diameter, max.		0.40%	30.2	Gage
105	Overall height, max.		100%	30.2	Gage
106	Marking (paint) incorrect or missing		100%	30.2	Visual
Minor					
201	Paint damaged or incomplete		0.65%	30.2	Visual
202	Evidence of poor workmanship		0.65%	30.11	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1	DRAWING NUMBER
40.4.2.5	Test Mine, BLU 92/B (AP-40)			9347080
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Lead shot not present		100%	30.12	Radiograph
Major					
101	Depth to borerider min.		100%	30.2	Gage
102	Width, max.		0.40%	30.2	Gage
103	Length, max.		0.40%	30.2	Gage
104	Height, max.		0.40%	30.2	Gage
105	Primer missing or incorrect		0.40%	30.2	Visual
106	Aeroballistic seal missing or incorrectly applied		0.40%	30.2	Visual
107	Location of mine in housing (detail A)		100%	30.2	Gage
108	Location of borerider to datum -A-		100%	30.2	Gage
109	Borerider located incorrectly with respect to mine center line		100%	30.2	Visual
Minor					
201	Rivet(s) missing or incorrect		0.65%	30.2	Visual
202	Distance from housing to fastener (2 places)		0.65%	30.2	Gage
203	Evidence of poor workmanship		0.65%	30.11	Visual

REMARKS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE						SHEET 1 OF 1	DRAWING NUMBER
40.4.2.6	Test Mine, BLU 92/B (AP-40)							9347080
								NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST					NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD	
					LOT ACCEPTANCE TEST (AMBIENT)					
Mine Assy Insp. Lot	3/ Sample Size	AD Mode	1/ Premature Arming	Detonation	2/ Early SD	Low Order Function And/Failure to Function			Requirements	Test Method
0-1200	21	21	0-1	0-1	2-3		1-2		30.7	40.4.3.2/40.5.6
1201-3200	33	33	0-1	0-1	3-4		1-2		30.7	40.4.3.2/40.5.6
3201-10,000	51	51	0-1	0-1	5-6		2-3		30.7	40.4.3.2/40.5.6

NOTES:
1/ Premature arming and detonation is defined in 40.5.6.2. CRITICAL.
2/ Early self destruct (SD) is defined in 40.5.6.2.
3/ The sample shall be divided into three groups for conditioning at hot, cold, and ambient (40.4.3.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

40.4.3 Testing. Applicable.

40,4.3.1 Dimensional and weight control of booster pellet (See Dwg. 9292604). Not applicable.

40.4.3.2 Lot acceptance testing. Applicable.

40.4.4 Inspection equipment. Applicable.

40.4.5 Launch simulator. Applicable.

40.4.5.1 Impact medium. Applicable.

40.4.5.2 SD setter. Applicable.

40.5 Test methods and procedures. Applicable.

40.5.1 Density of booster pellet. Not applicable.

40.5.2 Pretest of composition B4 Type I explosive. Not applicable.

40.5.3 HE explosive exudation test. Not applicable.

40.5.4 Verification of safe condition of body assembly. This paragraph is applicable with the phrase 'explosive leads and* deleted.

40.5.5 Verification of body assembly circuit resistance. This paragraph is applicable with the phrase "Prior to assembly of explosive leads and" deleted .

40.5.6 Anti-disturbance (AD) function test. This paragraph is applicable except that units that fail to function should not be destroyed but failure analyzed.

40.5.6.1 Recording of data. Applicable with subparagraph f deleted.

40.5.6.2 Premature arming; premature detonation; early self destruct. This paragraph is applicable with the phrase "of the mine" deleted in subparagraphs b and c.

40.5.6.3 Verification of inert fill. Each inert kill mechanism (Dwg. 9347082) and final assembly shall be radiographer to verify the-presents of lead shot. Any item not containing lead shot shall be classed defective and removed from the lot.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

50. PACKAGING

50.1 Packaging requirements. Applicable. Additionally, the Test BLU 92/B (AP-40) shall be stored separately from the Tactical BLU 92/B and special test configurations.

60. NOTES

60.1 Intended use. The Test Mine, BLU 92/B (AP-40) covered by this Appendix is intended for use in two types of Test Dispensers CBU 89/B and CBU 78/B.

60.2 Ordering data. Applicable.

60.3 Submission of inspection equipment design for approval. Applicable.

60.4 Submission of results from contractor conducted examinations and tests. Applicable.

60.5 Distribution of ammunition data cards. Applicable.

60.6 Submission of procedures. Applicable.

60.7 Drawings. Applicable.

60.8 Data requirements. Applicable.

60.9 Changes from previous issue. Applicable.

60.10 Subject term (key word) listing. Applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-23T02:55Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARDEC
ATTN: AMSMC-QA
PICATINNY ARSENAL, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-63456A	MINE, ANTI-PERSONNEL: HE, BLU-92/B LAP

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:55Z
Check the source to verify that this is the current version before use.