INCH-POUND


MIL-DTL-21097/16F
18 August 2005
SUPERSEDING
MIL-C-21097/16E
14 January 1986


DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD
CONTACT, CRIMP, REMOVABLE, TYPE CR


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-21097.

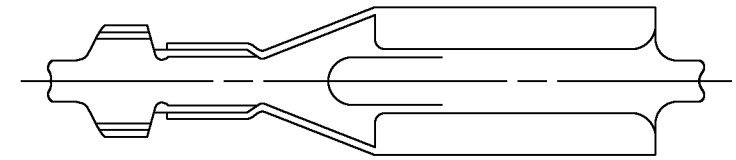


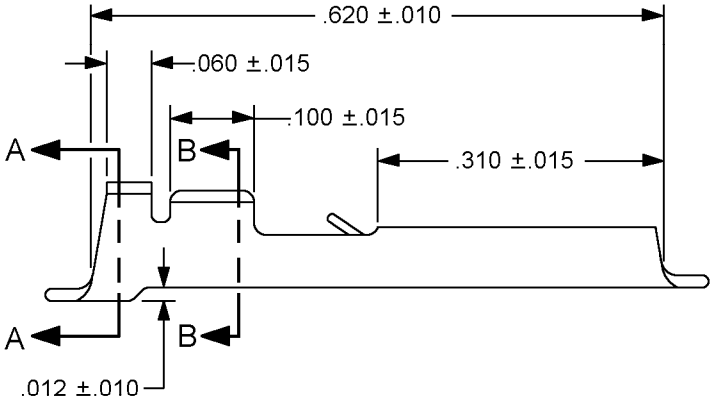

Inches	mm
.010	.25
.012	.30
.015	.38
.060	1.52
.100	2.54
.310	7.87
.620	15.75



SECTION A - A



SECTION B -B

FIGURE 1. Crimp type contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:50Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .015 (.38 mm) for three place decimals.
3. Metric equivalents are given for information only.
4. For field repair use contact specified on slash sheet MIL-DTL-21097/17.

FIGURE 1. Crimp type contact - Continued.

REQUIREMENTS

Dimensions and configuration: See figure 1 and table I.

Use: With connectors conforming to MIL-DTL-21907/13.

Individual contact engagement and separation forces: Dimensions of the gage shall be in accordance with MIL-DTL-21097/19.

Finish: Gold plating in accordance with ASTM B488, type II, code C, class 1.27, over nickel plating in accordance with SAE-AMS- QQ-N-290, class 2, 30 to 150 microinches.

Contacts shall be crimped in accordance with manufacturer's recommended tooling.

Part or Identifying Number (PIN): M21097/16-(dash number from table I).

TABLE I. Contact – crimp type.

Dash number	Dimensions (inches) 1/				Wire size	Insulation diameter
	A ±0.015 (0.38)	B ±0.015 (0.38)	C ±0.15 (0.38)	D ±0.15 (0.38		
01	.100 (2.54)	.090 (2.29)	.075 (1.91)	.060 (1.52)	#28 - #24 AWG	.030 - .060 (0.76 – 1.52)
02	.125 (3.18)	.125 (3.18)	.075 (1.91)	.060 (1.52)	#28 - #24 AWG	.050 - .078 (1.27 – 1.98)
03	.120 (3.05)	.111 (2.82)	.090 (2.29)	.080 (2.03)	#24 - #20 AWG	.040 - .080 (1.02 – 2.03)
04	.165 (4.19)	.130 (3.30)	.120 (3.05)	.088 (2.24)	2-#22 or 2-#20 or 1-#18 AWG	2-.045-.072 or (1.14-1.83) 1-.075-.095 (1.91-2.41)

1/ Millimeters are in parentheses.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:50Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-21097, this document references the following:

MIL-DTL-21097/13
MIL-DTL-21097/17
MIL-DTL-21097/19
ASTM B488
SAE-AMS-QQ-N-290

CONCLUDING MATERIALS

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA - CC

Preparing activity:
DLA - CC

Project: (5935-4505-007)

Review activities:
Army – AR, AT, CR4, MI
Navy – AS, MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:50Z
Check the source to verify that this is the current version before use.