INCH-POUND


MIL-DTL-21097/5F
18 August 2005
SUPERSEDING
MIL-C-21097/5E
29 March 1976

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD MALE ADAPTER, CONTACT SPACING (.200) ALTERNATE DUAL ROW, TYPE CS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-21097.

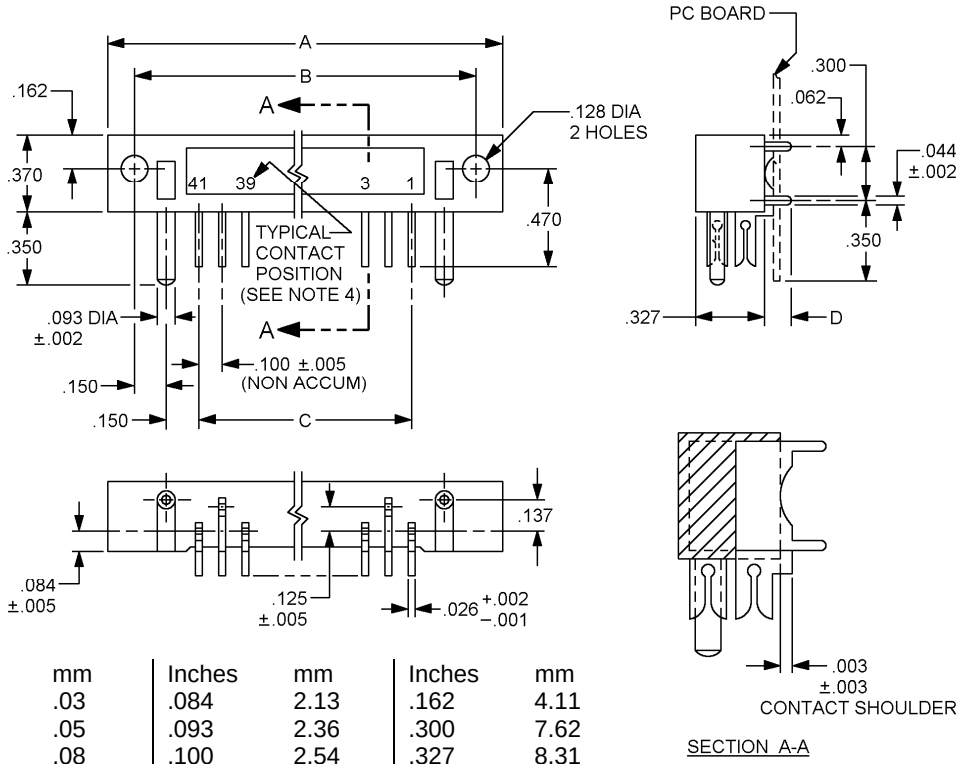


Inches	mm	Inches	mm	Inches	mm
.001	.03	.084	2.13	.162	4.11
.002	.05	.093	2.36	.300	7.62
.003	.08	.100	2.54	.327	8.31
.005	.13	.125	3.18	.350	8.89
.026	.66	.128	3.25	.370	9.40
.044	1.12	.137	3.48	.470	11.94
.062	1.57	.150	3.81		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .010 (.25 mm) for three place decimals.
3. Metric equivalents are given for information only.
4. Contacts shall be designated on the connector using numerals in the location shown.

FIGURE 1. Alternate dual row contacts, type CS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:49Z
Check the source to verify that this is the current version before use.

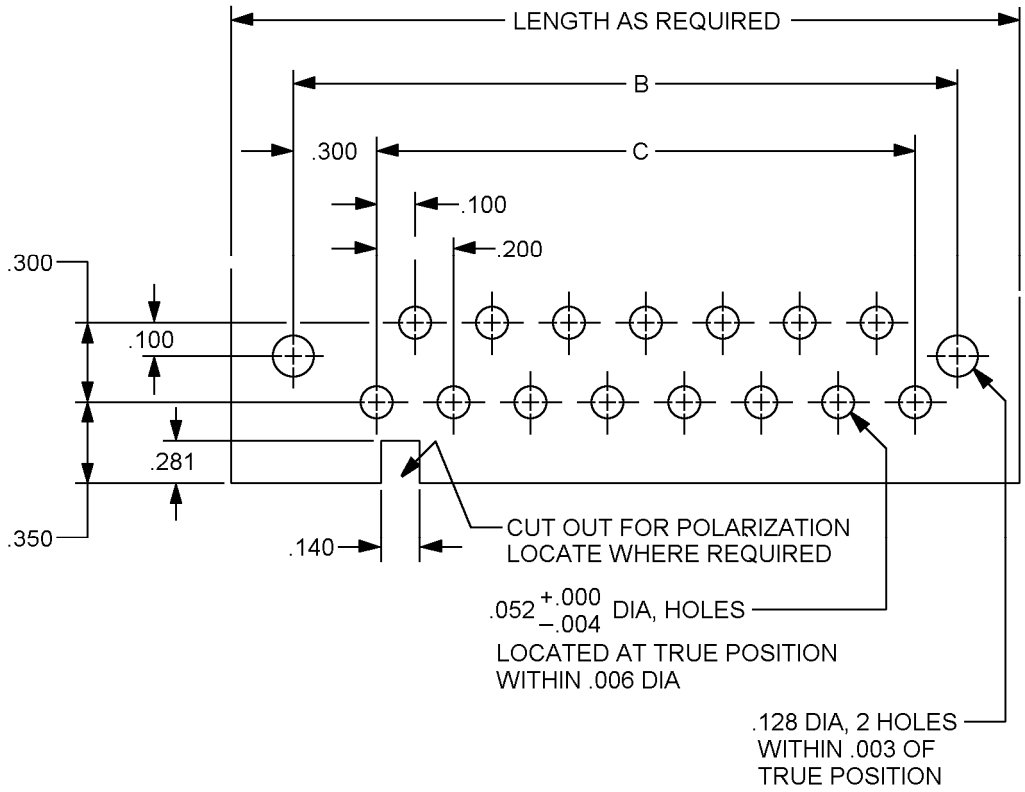

Inches	mm
.003	.08
.004	.10
.006	.15
.052	1.32
.100	2.54
.128	3.25
.140	3.56
.200	5.08
.281	7.14
.300	7.62
.350	8.89

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± .010 (.25 mm) for three place decimals.
3. Metric equivalents are given for information only.

FIGURE 2. Printed circuit board mounting and hole pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:49Z
Check the source to verify that this is the current version before use.

TABLE I. Connector, electrical, male adapter, type CS, class b, no mounting provision A.

Dash number	Style	Size	Dimensions (inches) 1/ 2/ A (maximum)	B ±0.015 (0.38)	C ±0.005 (0.13)	D ±0.010 (0.25)
01	17	2	2.470 (62.74)	2.200 (55.88)	1.600 (40.64)	.122 (3.10)
02	17	3	2.470 (62.74)	2.200 (55.88)	1.600 (40.64)	.153 (3.89)
03	23	2	3.070 (77.98)	2.800 (71.12)	2.200 (55.88)	.122 (3.10)
04	23	3	3.070 (77.98)	2.800 (71.12)	2.200 (55.88)	.153 (3.89)
05	29	2	3.670 (93.22)	3.400 (86.36)	2.800 (71.12)	.122 (3.10)
06	29	3	3.670 (93.22)	3.400 (86.36)	2.800 (71.12)	.153 (3.89)
07	35	2	4.270 (108.46)	4.000 (101.6)	3.400 (86.36)	.122 (3.10)
08	35	3	4.270 (108.46)	4.000 (101.6)	3.400 (86.36)	.153 (3.89)
09	41	2	4.870 (123.70)	4.600 (116.84)	4.000 (101.6)	.122 (3.10)
10	41	3	4.870 (123.70)	4.600 (116.84)	4.000 (101.6)	.153 (3.89)
11	47	2	5.470 (138.94)	5.200 (132.08)	4.600 (116.84)	.122 (3.10)
12	47	3	5.470 (138.94)	5.200 (132.08)	4.600 (116.84)	.153 (3.89)

1/ Dimensions are in inches.
2/ Metric equivalents are given for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1, figure 2, and table I.

Mating receptacles: Shall be in accordance with MIL-DTL-21097/4.

Finish: Gold plating in accordance with ASTM B488, type II, code C, class 1.27, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 2, 30 to 150 microinches.

Part or Identifying Number (PIN): M21097/5-(dash number from table I).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-21097, this document references the following:

MIL-DTL-21097/4
ASTM B488
SAE-AMS-QQ-N-290

CONCLUDING MATERIALS

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4505-013)

Review activities:
Army – AR, AT, AV, CR4, MI
Navy – AS, MC, OS, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:49Z
Check the source to verify that this is the current version before use.