INCH-POUND


MIL-C-83526/10A
30 June 1989
SUPERSEDING
MIL-C-83526/10
19 August 1986

MILITARY SPECIFICATION SHEET

DUMMY CONNECTOR, PLUG, FIBER OPTIC, TEST, CIRCULAR, HERMAPHRODITIC, 6 POSITIONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83526.

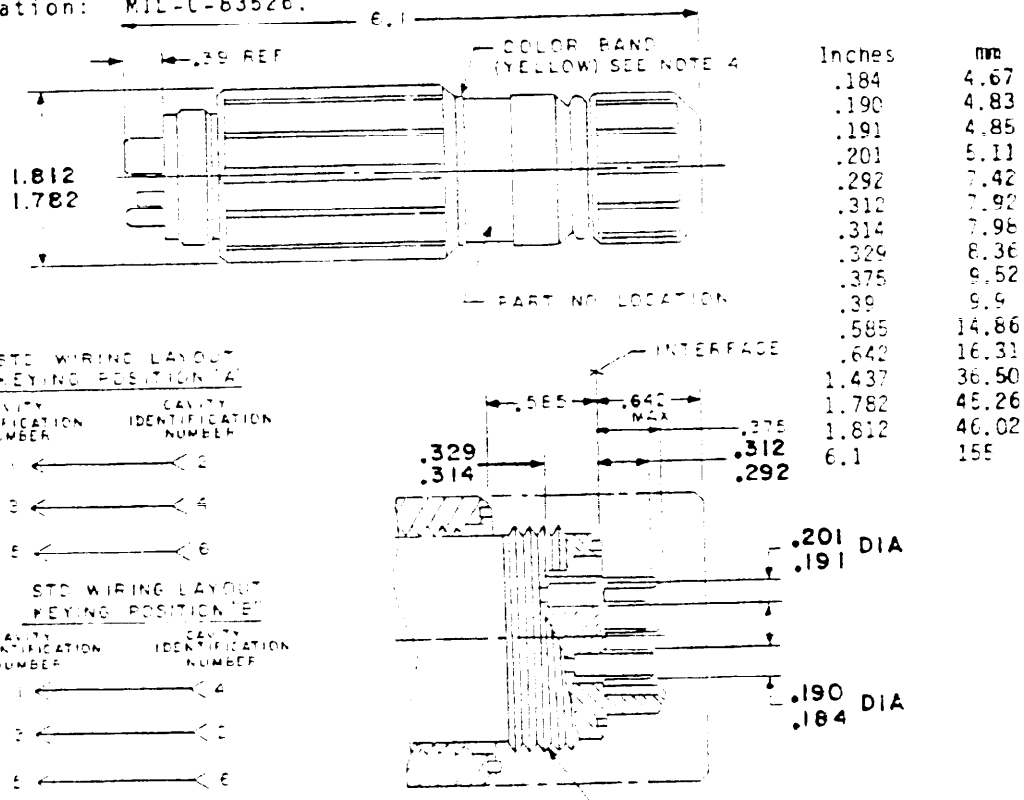

Inches	mm
.184	4.67
.190	4.83
.191	4.85
.201	5.11
.292	7.42
.312	7.92
.314	7.98
.329	8.36
.375	9.52
.39	9.9
.585	14.86
.642	16.31
1.437	36.50
1.782	45.26
1.812	46.02
6.1	155

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals, ±.03 (0.8 mm) for two place decimals and ±.1 (3 mm) for one place decimals. Angular tolerances are ±0° 30'.
4. The phrase "Fiber-Optic" must be included within the yellow band.
5. Unless otherwise specified, dimensions are symmetrical about centerlines.


FIGURE 1. Connector test plug.

FSC 6060

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

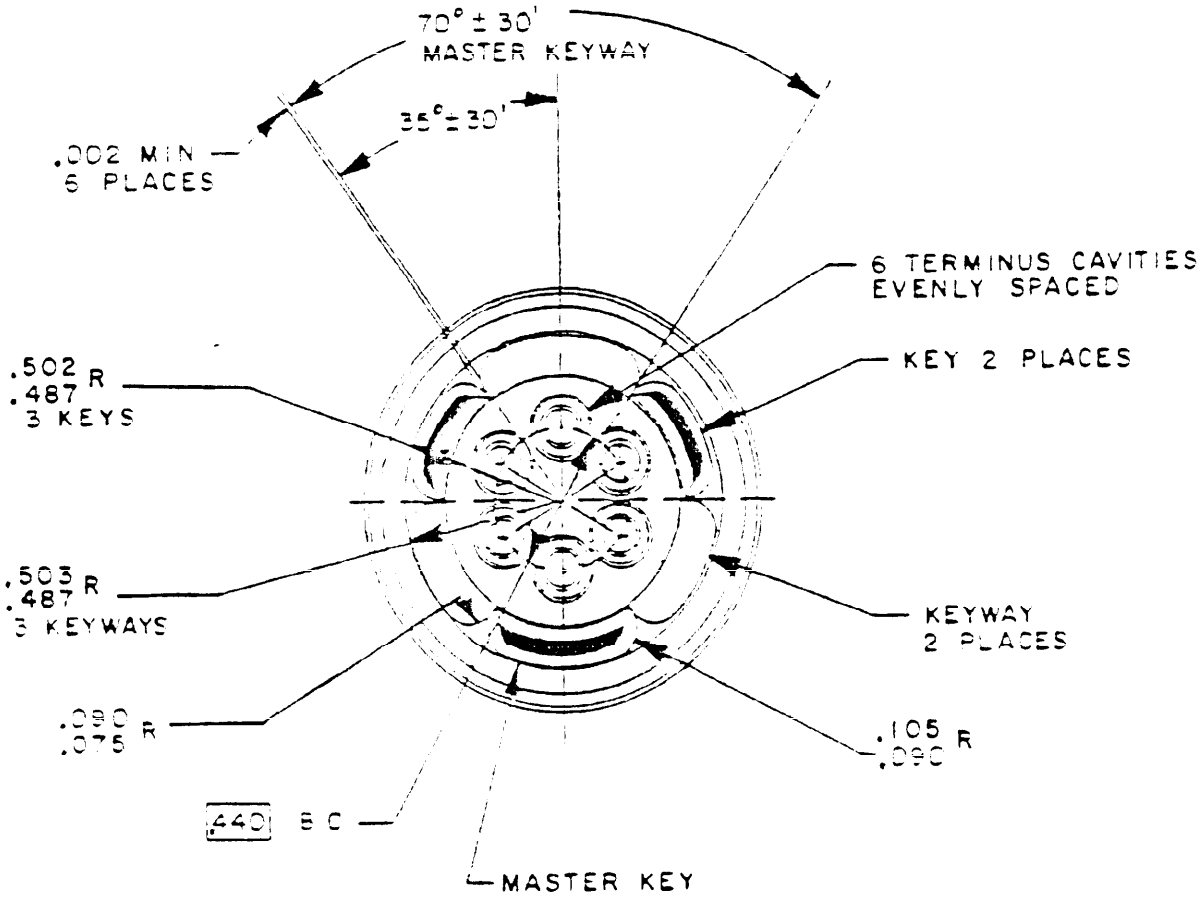


Inches	mm
.002	0.05
.075	1.90
.090	2.29
.105	2.67
.440	11.18
.487	12.37
.502	12.75
.503	12.78


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Test plug terminal configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

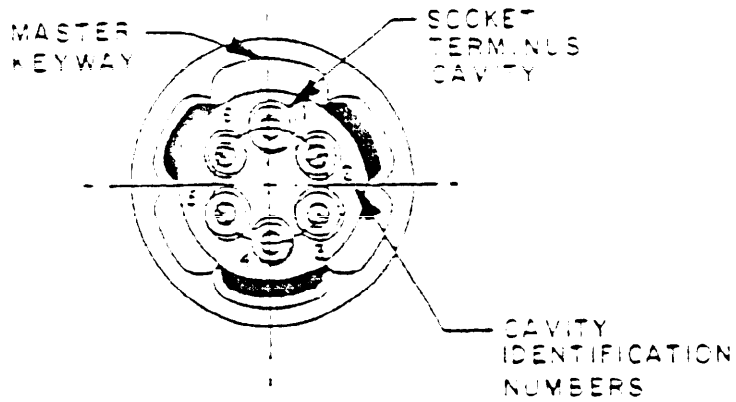

KEYING POSITION "A"

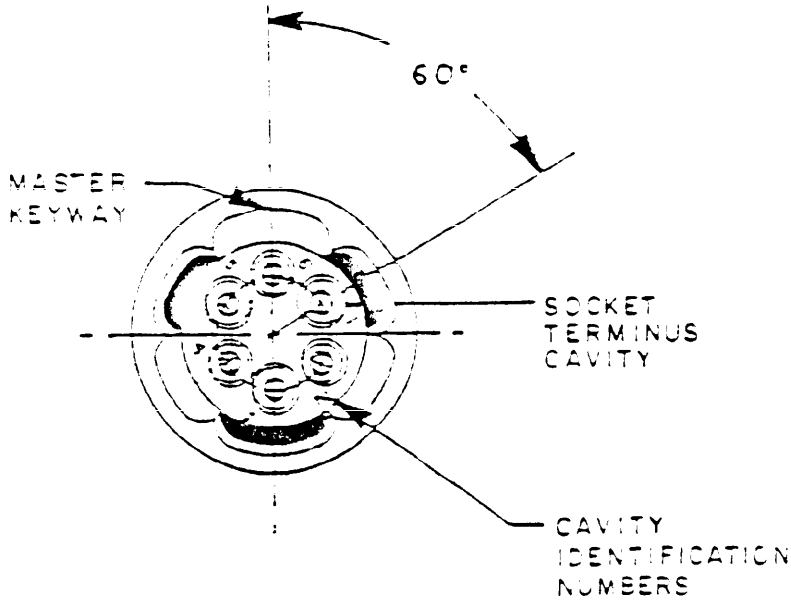

KEYING POSITION "B"

NOTE: Cavities 1,3, and 5 are socket terminus cavities.

FIGURE 3. Keying positions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1, 2, and 3.

Fiber optic cable:

Cable diameter: In accordance with DOD-C-85045.

Cable configuration: In accordance with DOD-C-85045.

Fiber diameter: In accordance with DOD-F-49291.

Fiber numerical aperture: In accordance with DOD-F-49291.

Fiber type: Multimode.

Fiber class: Graded index.

Fiber composition: Glass/glass.

Materials: See table I.

Connector termination and assembly tools: As specified in MIL-K-83533.

Cleaning procedures: The cleaning procedures for the connector shall be included with the assembly instructions of the connector.

Termini: The required number of termini shall be supplied with each connector, unless otherwise specified (see table II). Style P(pin) or S(socket), see MIL-T-29504/1 and MIL-T-29504/2. For dummy terminus, see MIL-T-29504/3.

Weight: 15 ounces maximum.

Coupling forces: 11.0 pounds.

Coupling torques: 5 inch-pounds.

Twist test: Not applicable.

Cable seal flexing: Not applicable.

Cable retention: Not applicable.

External bending moment: Not applicable.

Identification marking:

Part or Identifying Number (PIN): See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

PIN:

M83526/10- 01 A or B

Basic specification

Fiber size (see table II)

Keying position (see figure 3)

TABLE I. Material description.

Parts description	Material	Finish
Connector shell Insert Compression nut Coupling nut	Aluminum alloy 2011-T3 QQ-A-225/3 QQ-A-225/3	Anodized MIL-A-8625 Type II Class 2
Dowel pin Cap screw	CRES CRES	Passivated MIL-S-5002
O-rings	Fluorosilicone Rubber, MIL-R-25988 type I, class 1	None
Wiper seal	Polythane	None

TABLE II. PIN and characteristics.

PIN M83526/10	Keying position	Fiber size in termini DOD-F-49291
01A	A	50/125
01B	B	50/125
02A	A	100/140
02B	B	100/140
03A	A	No termini
03B	B	No termini

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.

PIN: M83526/10-(dash number from table II). Marked on flange of connector.

Patent notice: The Government does not have royalty-free license under the following patent for the benefit of manufacturers of the item, either for the Government or for use in equipment to be delivered to the Government.

Patent number	Patent expiration date
US 3,994,564	11/30/1993
US 4,054,366	10/18/1994
US 4,060,308	11/29/1994

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - MC, OS, YD
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0065-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.