MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, NONENVIRONMENTAL, 90°, SHIELD TERMINATION, CATEGORY 3A
(FOR MIL-C-5015 CRIMP, MIL-C-26482 SERIES 2, MIL-C-81703 SERIES 3, AND MIL-C-83723 SERIES III CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

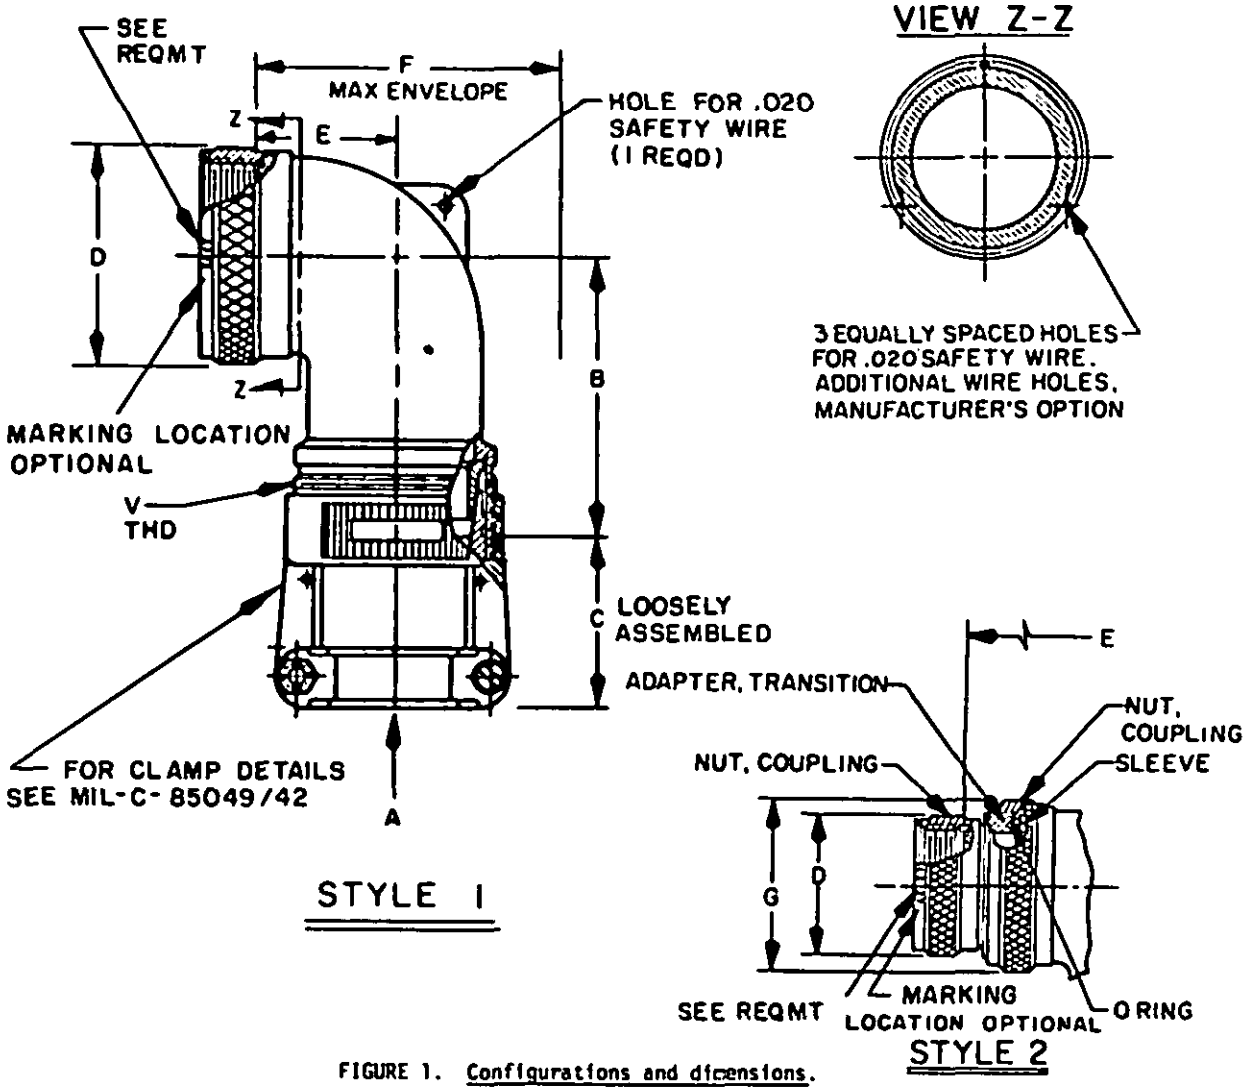


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ± .062	C REF	D DIA MAX
1	3				4	.125	.250	1	1.800	1.027	.669
2					6	.250	.437	2	1.320	1.027	.669
3		8	8S	8	4	.125	.250	1	1.200	1.027	.617
4		10	10S,10SL	10	4	.125	.312	1	1.920	1.027	.734
5					6	.250	.375	1	1.320	1.027	.734
6	7	12	12,12S	12	4	.125	.312	1	1.940	1.027	.858
7					6	.250	.437	1	1.940	1.027	.858
8					10	.350	.500	1	1.335	1.027	.858
9	12	14	14,14S	14	6	.250	.437	1	2.010	1.027	.984
10					10	.350	.575	1	1.655	1.027	.984

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
1	.838	.625-24 UNEF	1.18	—
2	1.388	.750-20 UNEF	2.02	.858
3	.541	.625-24 UNEF	1.09	—
4	.838	.625-24 UNEF	1.18	—
5	.838	.750-20 UNEF	1.27	—
6	.841	.625-24 UNEF	1.18	—
7	.841	.750-20 UNEF	1.28	—
8	.841	1.000-20 UNEF	1.37	—
9	.741	.750-20 UNEF	1.38	—
10	.741	1.000-20 UNEF	1.47	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-04-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR				CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-81703 SER 3	MIL-C-28482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX		± .062	REF	MAX
11	19	18	18,16S	18	8	.250	.437	1	2.100	1.027	1.112
12					12	.500	.700	1	1.745	1.059	1.112
13	21	18	18	18	10	.350	.625	1	2.270	1.027	1.218
14					16	.625	.779	1	1.920	1.156	1.218
15	37	20	20	20	10	.350	.625	1	2.270	1.027	1.345
16					16	.625	.904	1	1.920	1.156	1.345
17		22	22	22	12	.500	.750	1	2.380	1.059	1.468
18					20	.875	1.029	1	2.025	1.375	1.468
19		24	24	24	12	.500	.750	1	2.380	1.059	1.593
20					20	.875	1.144	1	2.025	1.375	1.593

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
11	.926	.750-20 UNEF	1.59	—
12	.926	1.187-18 UNEF	1.77	—
13	1.016	1.000-20 UNEF	1.80	—
14	1.016	1.437-18 UNEF	1.97	—
15	1.016	1.000-20 UNEF	1.80	—
16	1.016	1.437-18 UNEF	1.97	—
17	1.166	1.187-18 UNEF	2.11	—
18	1.166	1.750-18 UNS	2.29	—
19	1.106	1.187-20 UNEF	2.11	—
20	1.166	1.750-18 UNS	2.29	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
21			28		16	.625	.937	1	2.550	1.156	1.988
22					24	1.000	1.375	1	2.195	1.500	1.969
23			32		16	.625	.937	1	2.800	1.156	2.219
24					20	.875	1.250	1	2.800	1.375	2.219
25					28	1.250	1.625	1	2.445	1.781	2.219
26			36		16	.625	.937	1	2.770	1.156	2.469
27					24	1.000	1.375	1	2.770	1.500	2.469
28					32	1.437	1.840	1	2.415	1.830	2.469
29			40		16	.625	.937	1	2.770	1.156	2.719
30					24	1.000	1.375	1	2.770	1.500	2.719

DASH NO	E ±.082	V THREAD CLASS 2A	F MAX	G DIA MAX
21	1.268	1.437-18 UNEF	2.33	—
22	1.268	2.000-18 UNS	2.51	—
23	1.618	1.437-18 UNEF	2.81	—
24	1.618	1.750-18 UNS	2.81	—
25	1.618	2.250-16 UN	3.07	—
26	1.618	1.437-18 UNEF	3.13	—
27	1.618	2.000-18 UNS	3.13	—
28	1.618	2.500-16 UN	3.39	—
29	2.568	1.437-18 UNEF	3.88	—
30	2.568	2.000-18 UNS	3.88	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C 81703 SER 1	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
31			40		32	1.437	1.875	1	2.415	1.830	2.719
32					16	.625	.937	1	2.770	1.156	2.969
33			44		24	1.000	1.375	1	2.770	1.500	2.969
34					32	1.437	1.875	1	2.415	1.830	2.969
35					16	.625	.937	1	2.770	1.156	3.219
36			48		24	1.000	1.375	1	2.770	1.500	3.219
37					32	1.437	1.875	1	2.415	1.830	3.219
38	81				12	.500	.750	1	2.380	1.059	1.653
39					20	.875	1.104	1	2.025	1.375	1.653
40	19	18	16,16S	16	10	.350	.625	1	2.100	1.027	1.112

DASH NO	E ±.082	V THREAD CLASS 2A	F MAX	G DIA MAX
31	2.588	2.500-16 UN	4.14	—
32	2.588	1.437-18 UNEF	3.88	—
33	2.588	2.000-18 UNS	3.88	—
34	2.588	2.500-16 UN	4.14	—
35	2.588	1.437-18 UNEF	3.88	—
36	2.588	2.000-18 UNS	3.88	—
37	2.588	2.500-16 UN	4.14	—
38	1.188	1.187-18 UNEF	2.11	—
39	1.188	1.750-18 UNS	2.29	—
40	.828	1.000-20 UNEF	1.68	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR				CLAMP SIZE	A CABLE RANGE		STYLE	B ±.062	C REF	D DIA MAX
	MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX				
41	27	18	18	18	4	.125	.312	1	2.270	1.027	1.218
42					6	.250	.437	1	2.270	1.027	1.218
43	37	20	20	20	6	.250	.437	1	2.270	1.027	1.345
44		22	22	22	4	.125	.312	1	2.380	1.027	1.468
45					6	.250	.437	1	2.380	1.027	1.468
46		24	24	24	10	.350	.625	1	2.380	1.027	1.593
47			36		12	.500	.750	1	2.770	1.059	2.469
48			40		12	.500	.750	1	2.770	1.059	2.469
49		10	10S, 10SL	10	8	.250	.437	2	1.940	1.027	.734
50	12	14	14, 14S	14	12	.500	.750	2	2.270	1.059	.984

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
41	1.016	.625-24 UNEF	1.80	—
42	1.016	.750-20 UNEF	1.80	—
43	1.016	.750-20 UNEF	1.80	—
44	1.166	.625-24 UNEF	2.11	—
45	1.166	.750-20 UNEF	2.11	—
46	1.166	1.000-20 UNEF	2.11	—
47	1.816	1.187-18 UNEF	3.13	—
48	1.816	1.187-18 UNEF	3.88	—
49	1.391	.750-20 UNEF	2.03	.858
50	1.766	1.187-18 UNEF	2.81	1.218

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
51	19	16	16,165	16	16	.675	.937	2	2.380	1.156	1.772
52	21	18	18	18	12	.500	.750	1	2.270	1.059	1.218
53	61	X	X	X	16	.625	.937	1	2.025	1.156	1.653
54	37	20	20	20	12	.500	.750	1	2.270	1.059	1.345
55					20	.875	1.250	2	2.550	1.375	1.345
56	X	22	22	22	10	.350	.625	1	2.380	1.027	1.468
57					16	.625	.937	1	2.380	1.156	1.468
58					20	875	1.250	2	2.550	1.375	1.468
59		24	24	24	16	.625	.937	1	2.380	1.156	1.593
60		X	28	X	12	.500	.750	1	2.550	1.059	1.989

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
51	1.916	1.437-18 UNEF	2.07	1.468
52	1.016	1.187-18 UNEF	1.88	—
53	1.166	1.437-18 UNEF	2.14	—
54	1.016	1.187-18 UNEF	1.88	—
55	2.016	1.750-18 UNS	3.14	1.989
56	1.166	1.000-20 UNEF	2.11	—
57	1.166	1.437-18 UNEF	2.12	—
58	2.016	1.750-18 UNEF	3.14	1.989
59	1.166	1.437-18 UNEF	2.14	—
60	1.266	1.187-18 UNEF	2.33	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR				CLAMP SIZE	A CABLE RANGE		STYLE	B ±.062	C REF	D DIA MAX
	MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX				
61			28		20	.875	1.250	1	2.550	1.375	1.969
62			32		24	1.000	1.375	1	2.800	1.500	2.219
63			36		20	.875	1.250	1	2.770	1.375	2.469
64					28	1.250	1.625	1	2.770	1.781	2.469
65			40		20	.875	1.250	1	2.770	1.375	2.719
66					28	1.250	1.625	1	2.770	1.781	2.719
67			44		20	.875	1.250	1	2.770	1.375	2.969
68					28	1.250	1.625	1	2.770	1.781	2.969
69			48		20	.875	1.250	1	2.770	1.375	3.219
70					28	1.250	1.625	1	2.770	1.781	3.219

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
61	1.266	1.750-18 UNS	2.39	—
62	1.616	2.000-18 UNS	2.86	—
63	1.816	1.750-18 UNS	3.13	—
64	1.816	2.250-16 UN	3.27	—
65	2.566	1.750-18 UNS	3.86	—
66	2.566	2.250-16 UN	4.02	—
67	2.566	1.750-18 UNS	3.86	—
68	2.566	2.250-16 UN	4.02	—
69	2.566	1.750-18 UNS	3.86	—
70	2.566	2.250-16 UN	4.02	—

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-26482 SER 2	MIL-C-5015 CRIMP	MIL-C-83723 SER III	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX
71	7	12	12,12S	12	10	.350	.625	2	2.100	1.027	.858
72	21	18	18	18	16	625	.931	2	2.380	1.186	1.218
73	X	24	24	24	20	.875	1.250	2	2.550	1.375	1.593
74	12	14	14,14S	14	4	.125	.312	1	2.010	1.027	.884
75	19	16	16,16S	16	4	.125	.312	1	2.100	1.027	1.112

DASH NO	E ±.062	V THREAD CLASS 2A	F MAX	G DIA MAX
71	1.888	1.000-20 UNEF	2.42	1.112
72	1.928	1.437-18 UNEF	2.88	1.488
73	2.026	1.750-18 UNS	3.15	1.869
74	.741	.825-24 UNEF	1.31	—
75	.928	.825-24 UNEF	1.59	—

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.062	1.57	1.37	34.8	1.86	47.2	2.100	53.34	2.415	61.34	2.87	72.9
.858	21.79	1.38	35.1	1.916	48.67	2.11	53.6	2.42	61.5	2.88	73.2
1.09	27.7	1.468	37.29	1.920	48.77	2.12	53.8	2.445	62.10	3.07	78.0
1.112	28.24	1.47	37.4	1.940	49.28	2.14	54.4	2.51	63.8	3.13	79.5
1.18	30.0	1.544	39.22	1.969	50.01	2.195	55.75	2.550	64.8	3.14	79.8
1.200	30.48	1.59	40.4	1.97	50.1	2.230	56.64	2.600	66.04	3.15	80.0
1.218	30.94	1.655	42.1	2.000	50.80	2.270	57.66	2.61	66.3	3.27	83.1
1.270	32.26	1.66	42.2	2.010	51.05	2.29	58.2	2.770	70.36	3.39	86.1
1.28	32.5	1.745	44.32	2.02	51.3	2.33	59.2	2.800	71.12	3.88	98.6
1.31	33.3	1.77	45.0	2.024	51.41	2.380	60.45	2.81	71.4	4.02	102.1
1.320	33.53	1.800	45.72	2.025	51.44	2.39	60.7	2.86	72.6	4.14	105.2
1.335	33.91	1.844	46.84	2.03	51.6						

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

Interface dimensions shall conform to MS3155 (design standard).

Material and finish:
Accessory components shall be as shown in table I.
Clamp assembly screws - 316 series stainless steel.
Cable sealing range: See table II.

TABLE I. Material and finish.

Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	W 1/ N
Body	316 Series Stainless steel	B, S

1/ Not for Navy use.

TABLE II. Cable sealing range.

Dash number	Cable sealing range		Test plug diamenter (inches)		Pull-out load (pounds)	Shell size range
	Minimum Dia (inches)	Maximum Dia (inches)	Min	Max		
03	.125	.250	.109	.125	25	1
05	.250	.375	.234	.250		
10	.350	.575	.334	.350	50	
12	.500	.700	.484	.500		
14	.625	.779	.609	.625	75	2
18	.875	1.029	.859	.875		
22	1.000	1.375	.984	1.000		
25	1.250	1.625	1.234	1.250	100	3
28	1.437	1.875	1.421	1.437		
31	1.437	1.875	1.421	1.437		
34	1.437	1.875	1.421	1.437		
37	1.437	1.875	1.421	1.437		

Simplified assembly instructions shall be packaged with each accessory.
Part number: See example below:


	M85049/	24	-	10	W
Military designator					
Specification sheet					
Dash number					
Finish					

Applications:
a. These accessories are for shield termination applications only and are less the rear adapter and grommet.
b. Style 2 applies when the cable diameter exceeds the "E" diameter of MS3155.
c. For assembly instructions see figure 2 of MIL-C-85049/25.

Qualification:
See MIL-C-85049, category 3A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.
Supersession data:

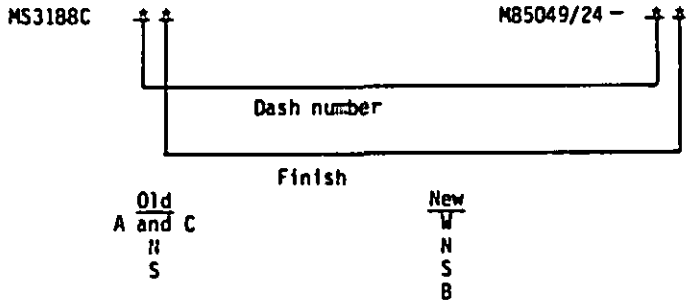

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent :
DLA - ES

(Project 5935-3067-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:11Z
Check the source to verify that this is the current version before use.