INCH-POUND

MIL-DTL-83513/3K
23 March 2026
SUPERSEDING
MIL-DTL-83513/3J
w/AMENDMENT 5
28 August 2019

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, RECTANGULAR, PLUG, MICROMINIATURE, POLARIZED SHELL, PIN CONTACTS, CLASS M, CRIMP TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83513.

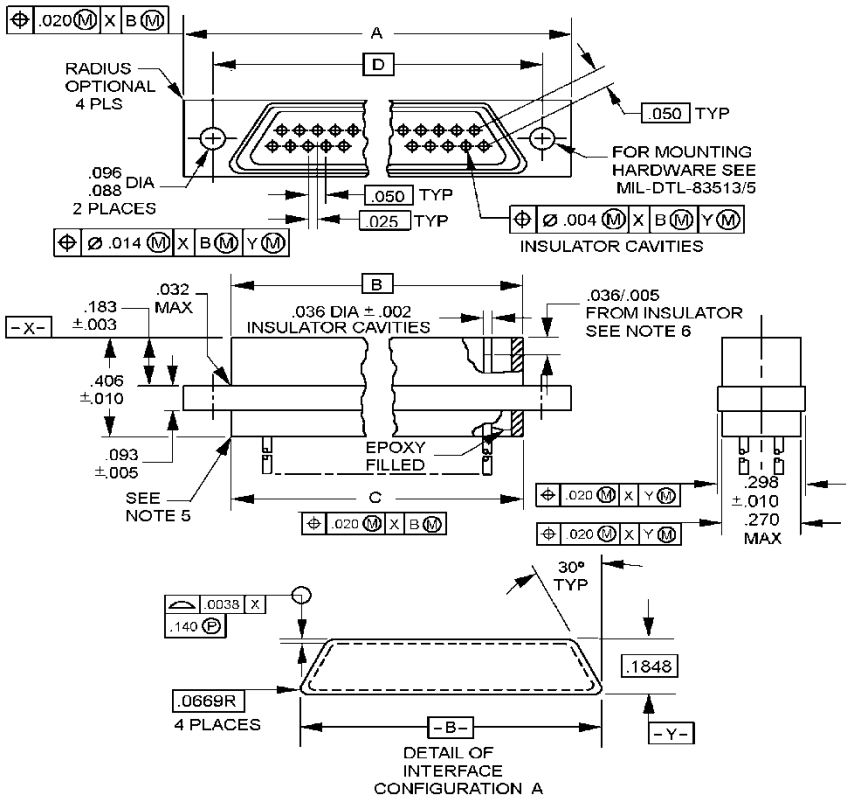


FIGURE 1.
Connector, plug, .050 spacing.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 6150

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

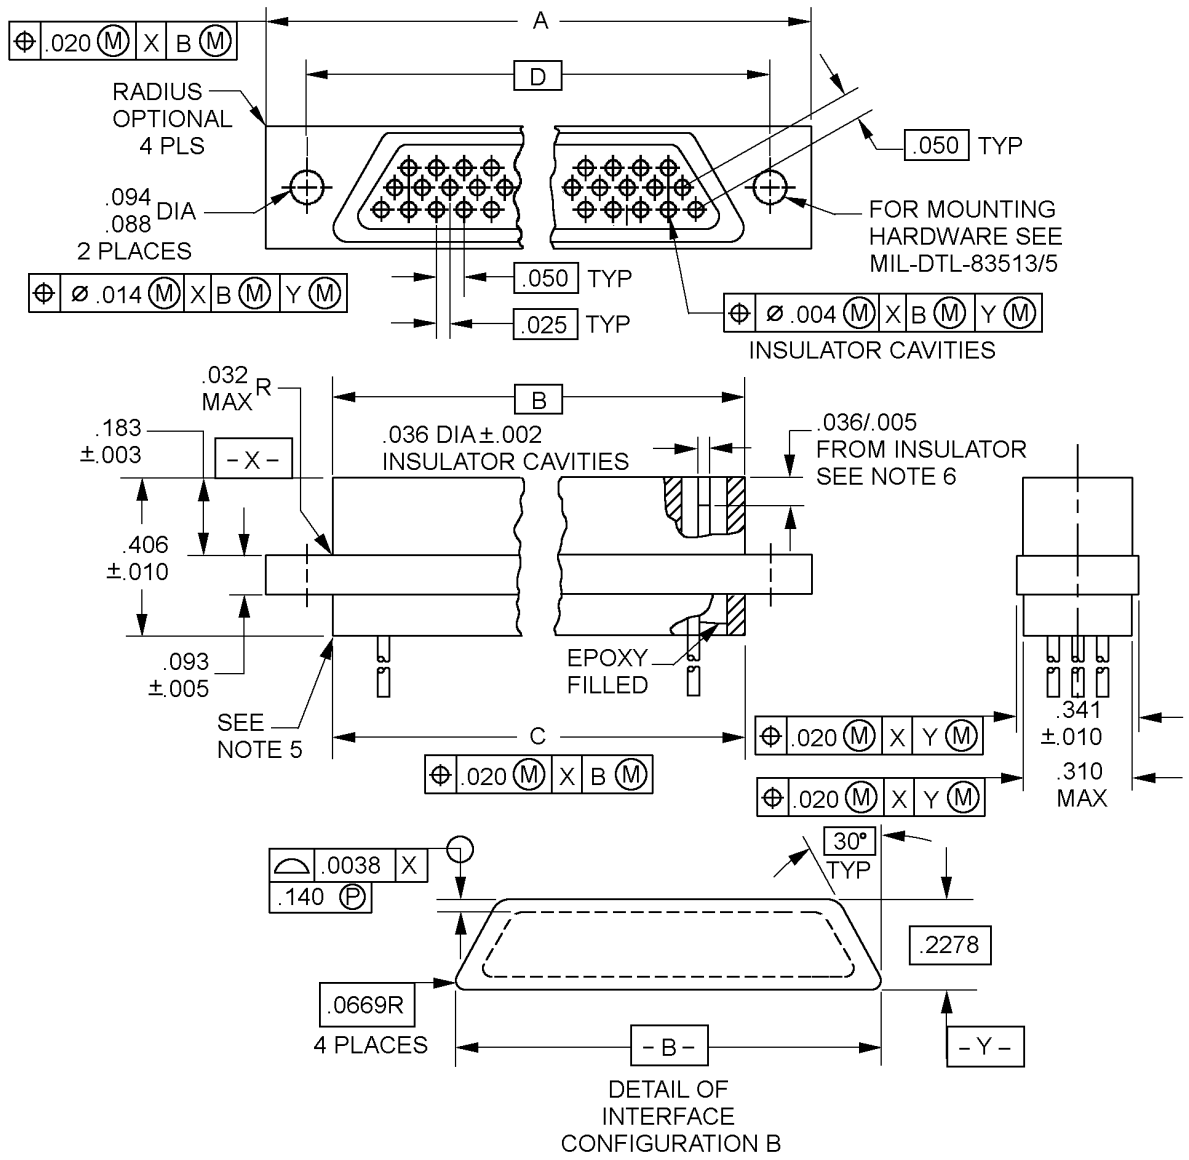


FIGURE 1. Connector, plug, .050 spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

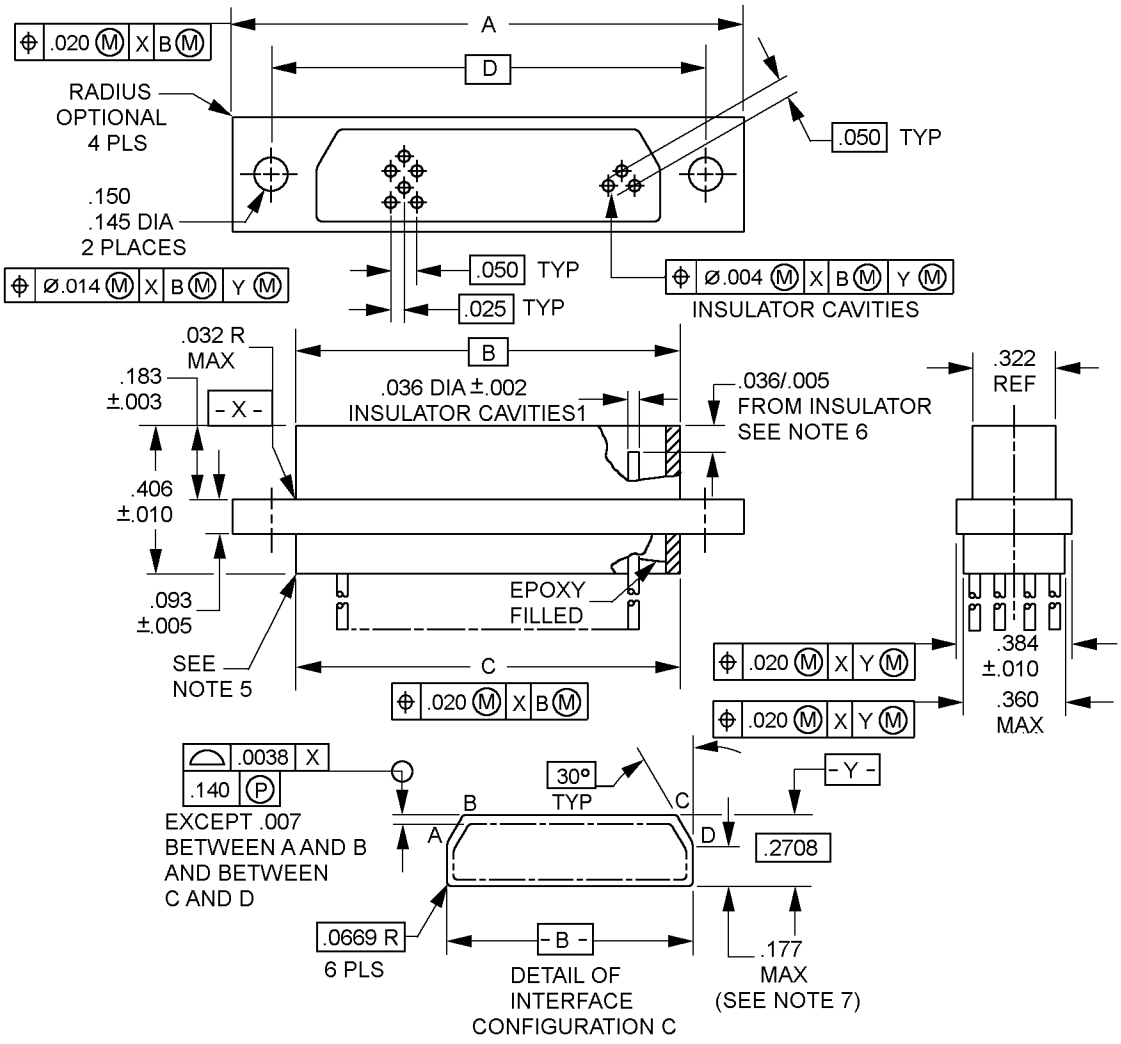


FIGURE 1. Connector, plug, .050 spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.


Number of cavities	A ±.010 (.25)	B BSC	C +.010 -.018 +(.25) -(.46)	D BSC	Configuration letter
9	.775 (19.69)	.3338 (8.479)	.390 (9.91)	.565 (14.35)	A
15	.925 (23.50)	.4838 (12.289)	.540 (13.72)	.715 (18.16)	A
21	1.075 (27.31)	.6338 (16.099)	.690 (17.53)	.865 (21.97)	A
25	1.175 (29.85)	.7338 (18.639)	.790 (20.07)	.965 (24.51)	A
31	1.325 (33.66)	.8838 (22.449)	.940 (23.88)	1.115 (28.32)	A
37	1.475 (37.47)	1.0338 (26.259)	1.090 (27.69)	1.265 (32.13)	A
51	1.425 (36.20)	.9838 (24.989)	1.040 (26.42)	1.215 (30.86)	B
100	2.160 (54.86)	1.3838 (35.149)	1.432 (36.37)	1.800 (45.72)	C

Inches	mm	Inches	mm
.0015	0.038	.094	2.39
.002	0.05	.1139	2.893
.003	0.08	.117	2.97
.0038	0.097	.123	3.12
.004	0.10	.145	3.68
.005	0.13	.150	3.81
.007	0.18	.173	4.39
.010	0.25	.181	4.60
.014	0.36	.182	4.62
.020	0.51	.183	4.65
.022	0.56	.224	5.69
.025	0.64	.2278	5.786
.036	0.91	.267	6.78
.050	1.27	.270	6.86
.0669	1.699	.298	7.57
.0671	1.704	.310	7.87
.089	2.26	.341	8.66
.090	2.29	.360	9.14
.0924	2.347	.384	9.75
.093	2.36	.406	10.31

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. Metric equivalents are in parentheses or columns.
5 Point from which the lead length is measured.
6. Shell shall be flush to insulator within ±.005 (0.13 mm).
7. Dimension line at point D locates the point of intersection of the two adjacent side of the receptacle interface.
8. 26 AWG wire is the maximum wire size that can be used in the solder cup.

FIGURE 1. Connector, plug, .050 spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

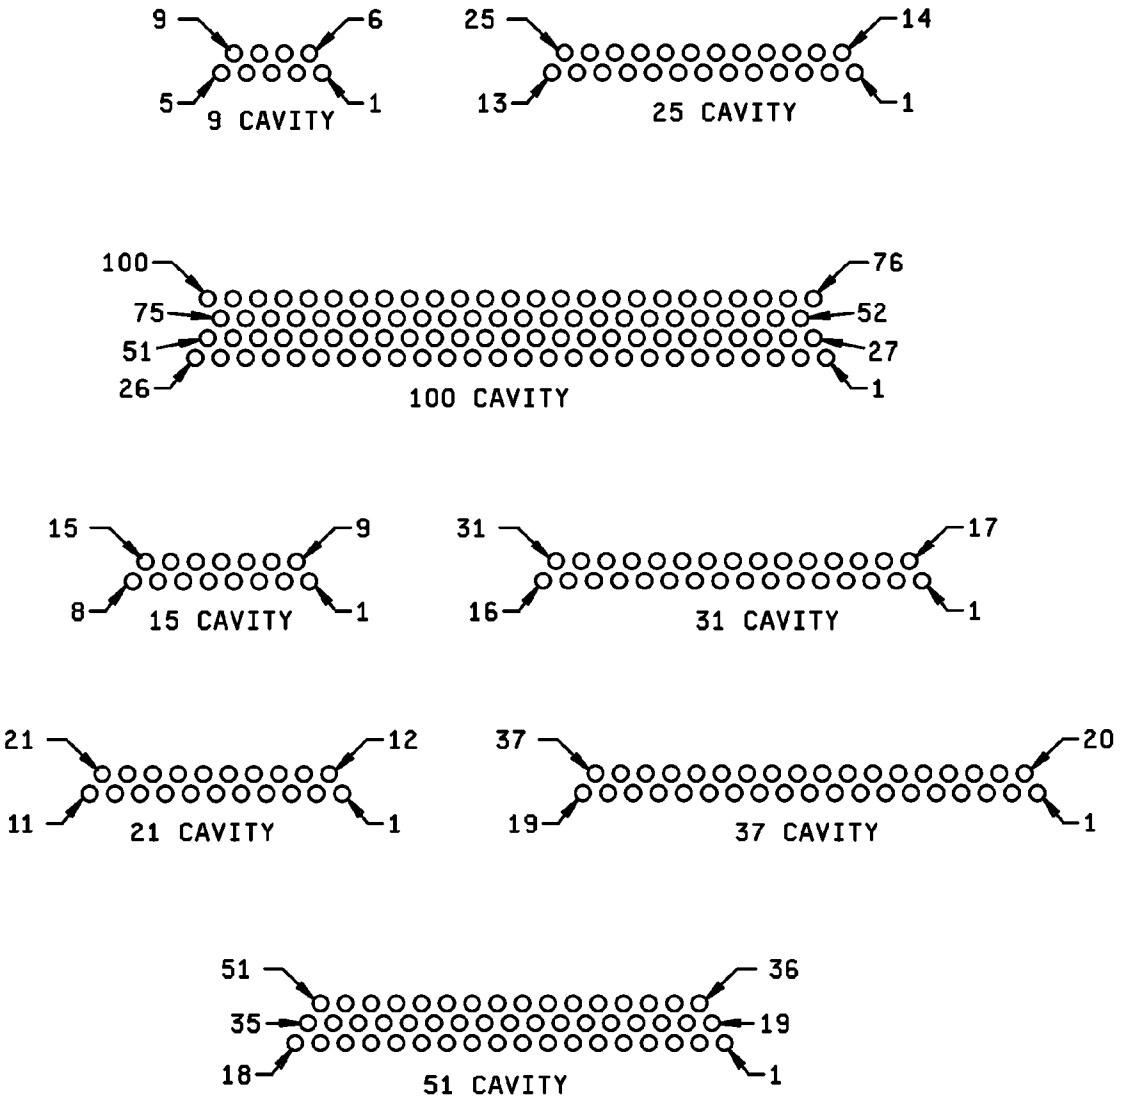

NOTES:
1. Engaging face of pin insert shown.
2. Cavity identification numbers are for reference only and do not appear on part.

FIGURE 2. Insert arrangement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. This specification sheet describes the pin side of a rectangular metal shell connector. This connector uses reverse gender contact, i.e., the live pin recessed in the insulator with the static socket protruding from a shrouded interface.

Materials and finish:

Shell: The requirements for shell materials shall be in accordance with MIL-DTL-83513.

Contact identification: See figure 2 for contact layout identification.

Contact connection: The pin contact (being recessed in the insulator) is normally connected to the live side of the circuit.

Current rating, maximum: 3 amperes per contact.

Mounting and mating hardware: Mounting hardware is to be ordered separately. Insert arrangements A through G, are in accordance with MIL-DTL-83513/5, configurations A and B. Insert arrangement H, are in accordance with MIL-DTL-83513/5, configuration C.

Mating hardware torque: Mating hardware torque shall be in accordance with MIL-DTL-83513/5.

Mating receptacle: Mating receptacle is in accordance with MIL-DTL-83513/2 or MIL-DTL-83513/4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): Consists of the letter M, the basic number of the specification sheet, a letter from the insert column and the shell finish.

M83513/03 - A 01 C

- M83513/03: Specification sheet number
- A: Insert arrangement (see figure 2)
  - A = 9
  - B = 15
  - C = 21
  - D = 25
  - E = 31
  - F = 37
  - G = 51
  - H = 100
- 01: Wire type
- C: Shell finish (Interface critical)
  - A = Pure electrodeposited aluminum
  - C = Cadmium
  - K = Zinc nickel
  - N = electroless nickel (space applications)
  - P = Passivated stainless steel
  - T = Nickel fluorocarbon polymer

Wire type 1/	Wire specification	Wire length (inches)	Notes
01 =	M22759/11-26-9	18	2/, 3/
02 =	M22759/11-26-9	36	2/, 3/
03 =	M22759/11-26-( )	18	3/, 4/, 5/
04 =	M22759/11-26-( )	36	3/, 4/, 5/
05 =	A-A-59551, type S, 25 AWG, gold plated 10 micro inches	0.5	6/, 7/
06 =	A-A-59551, type S, 25 AWG, gold plated 10 micro inches	1.0	6/, 7/
07 =	A-A-59551, type S, 25 AWG, tin plated 100 micro inches	0.5	6/, 7/, 9/
08 =	A-A-59551, type S, 25 AWG, tin plated 100 micro inches	1.0	6/, 7/, 9/
09 =	M22759/33-26-9	18	3/, 8/
10 =	M22759/33-26-9	36	3/, 8/
11 =	M22759/33-26-( )	18	3/, 4/, 5/, 8/
12 =	M22759/33-26-( )	36	3/, 4/, 5/, 8/
13 =	M22759/11-26-9	72	2/, 3/
14 =	M22759/11-26-( )	72	3/, 4/, 5/
15 =	M22759/33-26-9	72	3/, 8/
16 =	M22759/33-26-( )	72	3/, 4/, 5/, 8/
17 =	04035-26A-9	18	2/, 3/
18 =	04035-26A-9	36	2/, 3/
19 =	04035-26A-9	72	2/, 3/
20 =	04035-26A-( )	18	3/, 4/, 5/
21 =	04035-26A-( )	36	3/, 4/, 5/
22 =	04035-26A-( )	72	3/, 4/, 5/

See notes at end of wire type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

PIN – Continued.

01

Wire type

Wire type 1/	Wire specification	Wire length (inches)	Notes
23 =	M22759/47-26-9	18	2/, 3/
24 =	M22759/47-26-9	36	2/, 3/
25 =	M22759/47-26-9	72	2/, 3/
26 =	M22759/47-26-( )	18	3/, 4/, 5/
27 =	M22759/47-26-( )	36	3/, 4/, 5/
28 =	M22759/47-26-( )	72	3/, 4/, 5/
29 =	M22759/48-26-9	18	2/, 3/
30 =	M22759/48-26-9	36	2/, 3/
31 =	M22759/48-26-9	72	2/, 3/
32 =	M22759/48-26-( )	18	3/, 4/, 5/
33 =	M22759/48-26-( )	36	3/, 4/, 5/
34 =	M22759/48-26-( )	72	3/, 4/, 5/
35 =	M22759/49-26-9	18	2/, 3/
36 =	M22759/49-26-9	36	2/, 3/
37 =	M22759/49-26-9	72	2/, 3/
38 =	M22759/49-26-( )	18	3/, 4/, 5/
39 =	M22759/49-26-( )	36	3/, 4/, 5/
40 =	M22759/49-26-( )	72	3/, 4/, 5/
41 =	M22759/50-26-9	18	2/, 3/
42 =	M22759/50-26-9	36	2/, 3/
43 =	M22759/50-26-9	72	2/, 3/
44 =	M22759/50-26-( )	18	3/, 4/, 5/
45 =	M22759/50-26-( )	36	3/, 4/, 5/
46 =	M22759/50-26-( )	72	3/, 4/, 5/
47 =	M22759/51-26-9	18	2/, 3/
48 =	M22759/51-26-9	36	2/, 3/
49 =	M22759/51-26-9	72	2/, 3/
50 =	M22759/51-26-( )	18	3/, 4/, 5/
51 =	M22759/51-26-( )	36	3/, 4/, 5/
52 =	M22759/51-26-( )	72	3/, 4/, 5/
53 =	M22759/52-26-9	18	3/
54 =	M22759/52-26-9	36	3/
55 =	M22759/52-26-9	72	3/
56 =	M22759/52-26-( )	18	3/, 5/
57 =	M22759/52-26-( )	36	3/, 5/
58 =	M22759/52-26-( )	72	3/, 5/

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

1/ These connectors have leads attached of which wire type, wire size, wire color, and lead length are specified in the PIN.
2/ For connectors with shell finish N intended for space applications, wire shall be M22759/51-26-9 or M22759/47-26-9 or M22759/33-26-9.
3/ Lead length tolerance +1.0, -0.0 inch.
4/ For connectors with shell finish N intended for space applications, wire shall be M22759/51-26-( ) **or** M22759/47-26-() or M22759/33-26-( ).
5/ Color coding in accordance with MIL-STD-681, system I, except the appropriate color code shall be the individual contact cavity number minus 1 for contact positions 1 through 10 only, 11 through 20, etc. For example:

Pin number	Identification
4	3
9	8
21	0
31	0
77	6
100	9

6/ Lead length tolerance +0.2, -0.0 inch.
7/ Contact and wire may be a single piece design.
8/ Corrosion has been experienced on M83513 connectors that are prewired with SAE AS22759/33 and stored in a sealed environment. CAUTION SHOULD BE EXCERCISED WHEN USING THIS WIRE.
9/ Pure tin. The use of pure tin is prohibited. Tin content used in connector materials shall not exceed 97 percent, and an alloy material shall be chosen to inhibit the growth of tin whiskers.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-DTL-83513, this document references the following:

MIL-DTL-83513/2
MIL-DTL-83513/4
MIL-DTL-83513/5
MIL-STD-681
A-A-59551
SAE AS22759/33

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project: 6150-2026-003)

Review activities:
Army - AT, MI
Navy - AS, CG, MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:26Z
Check the source to verify that this is the current version before use.