| METRIC |

MIL-C-83527/1B
8 June 1992
SUPERSEDING
MIL-C-83527/1A
28 December 1988

MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83527.

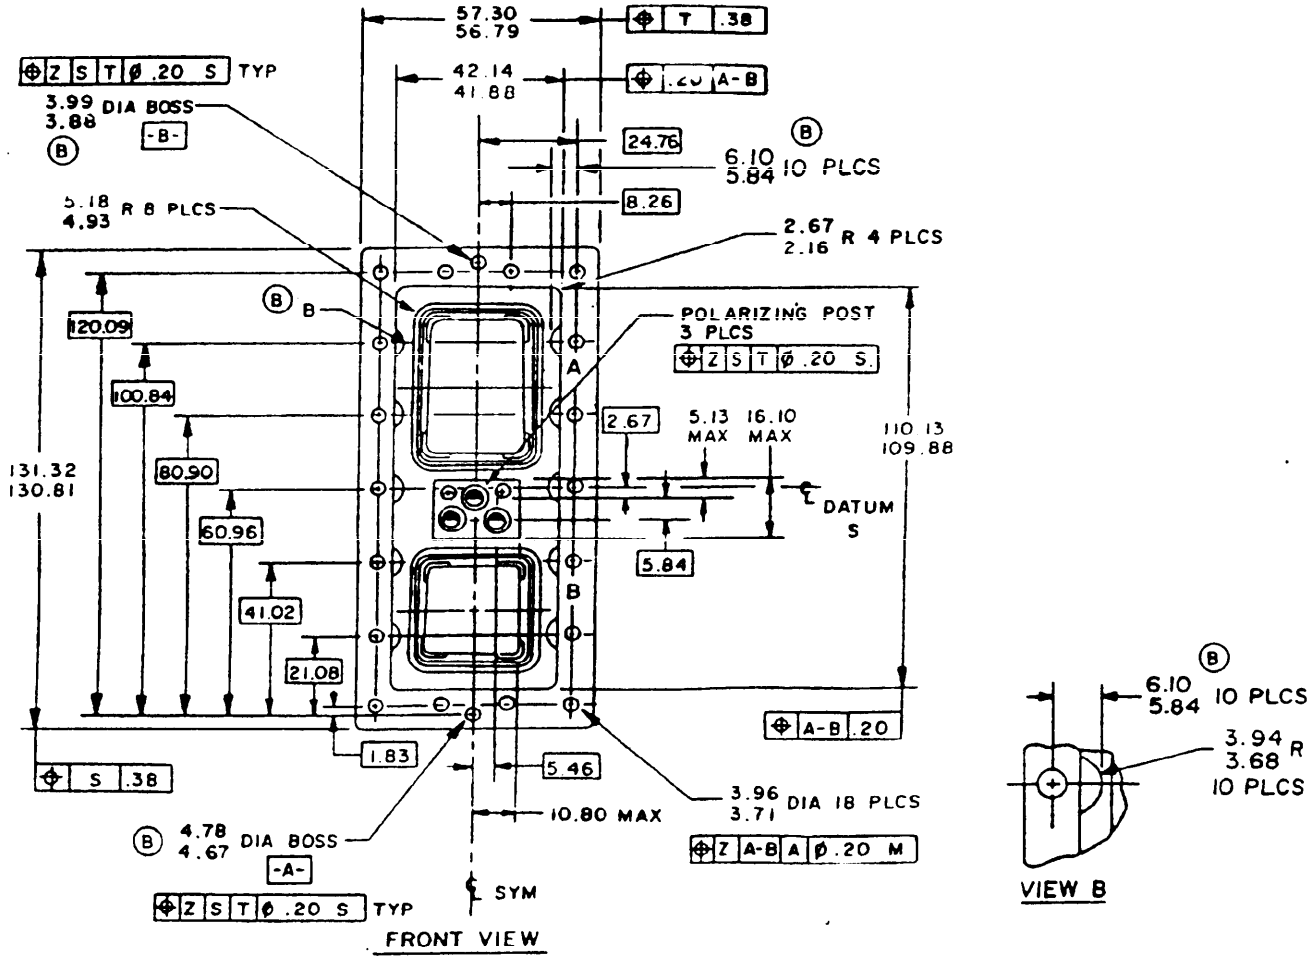


FIGURE 1. Connector, plug.

(B) denotes changes

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

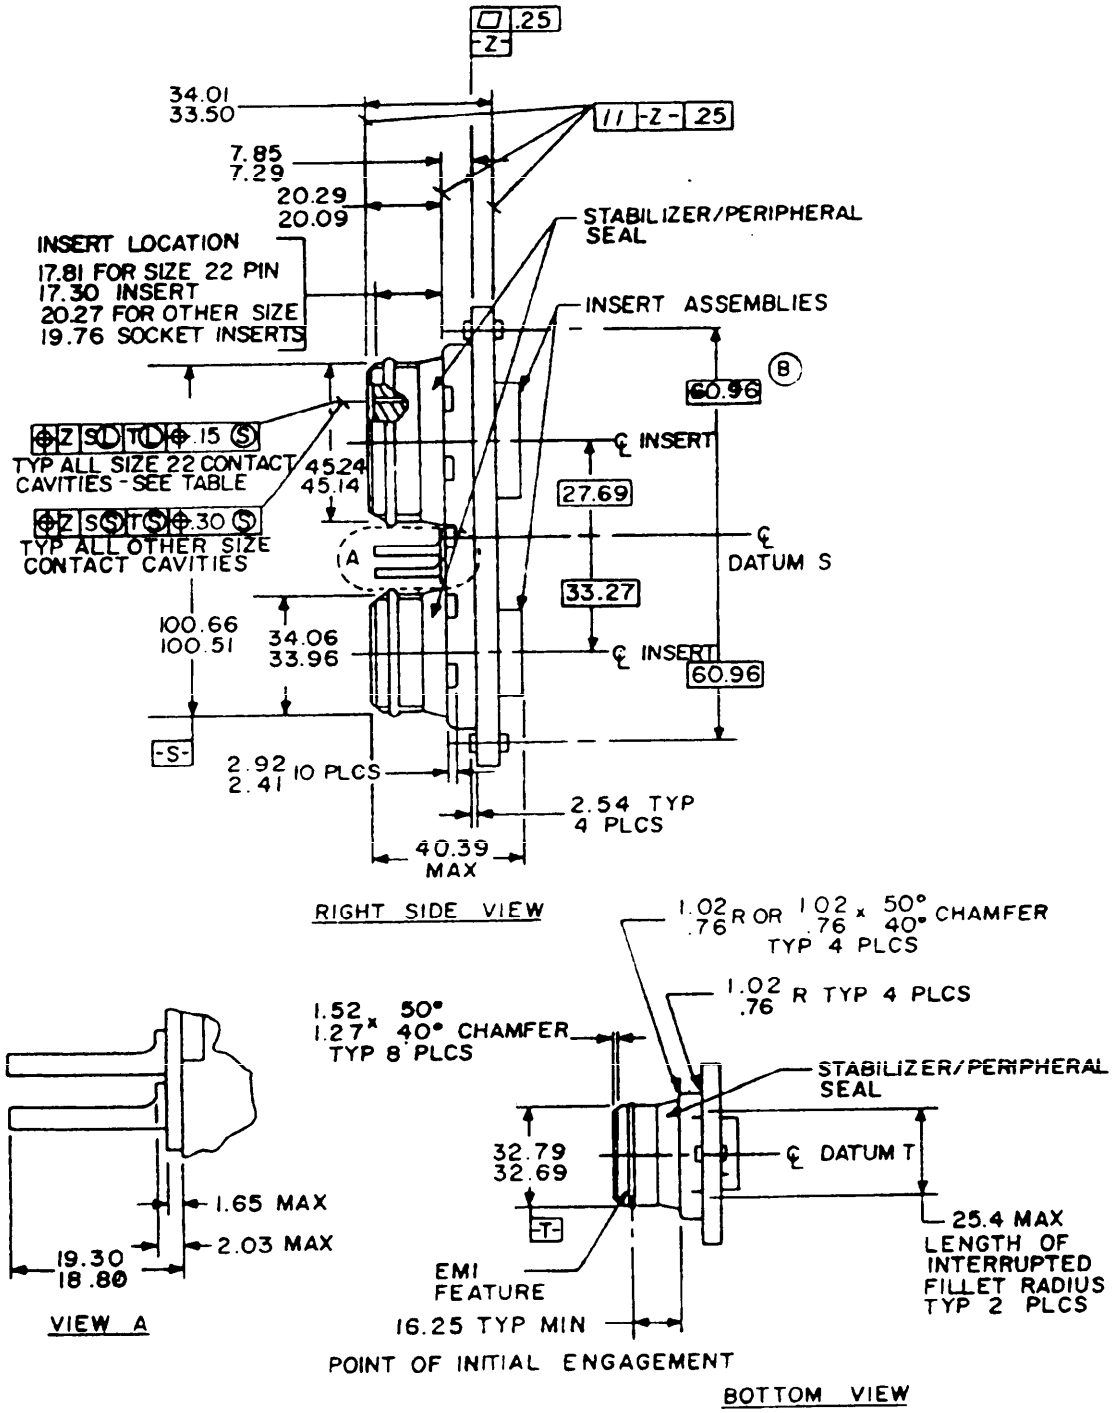


FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

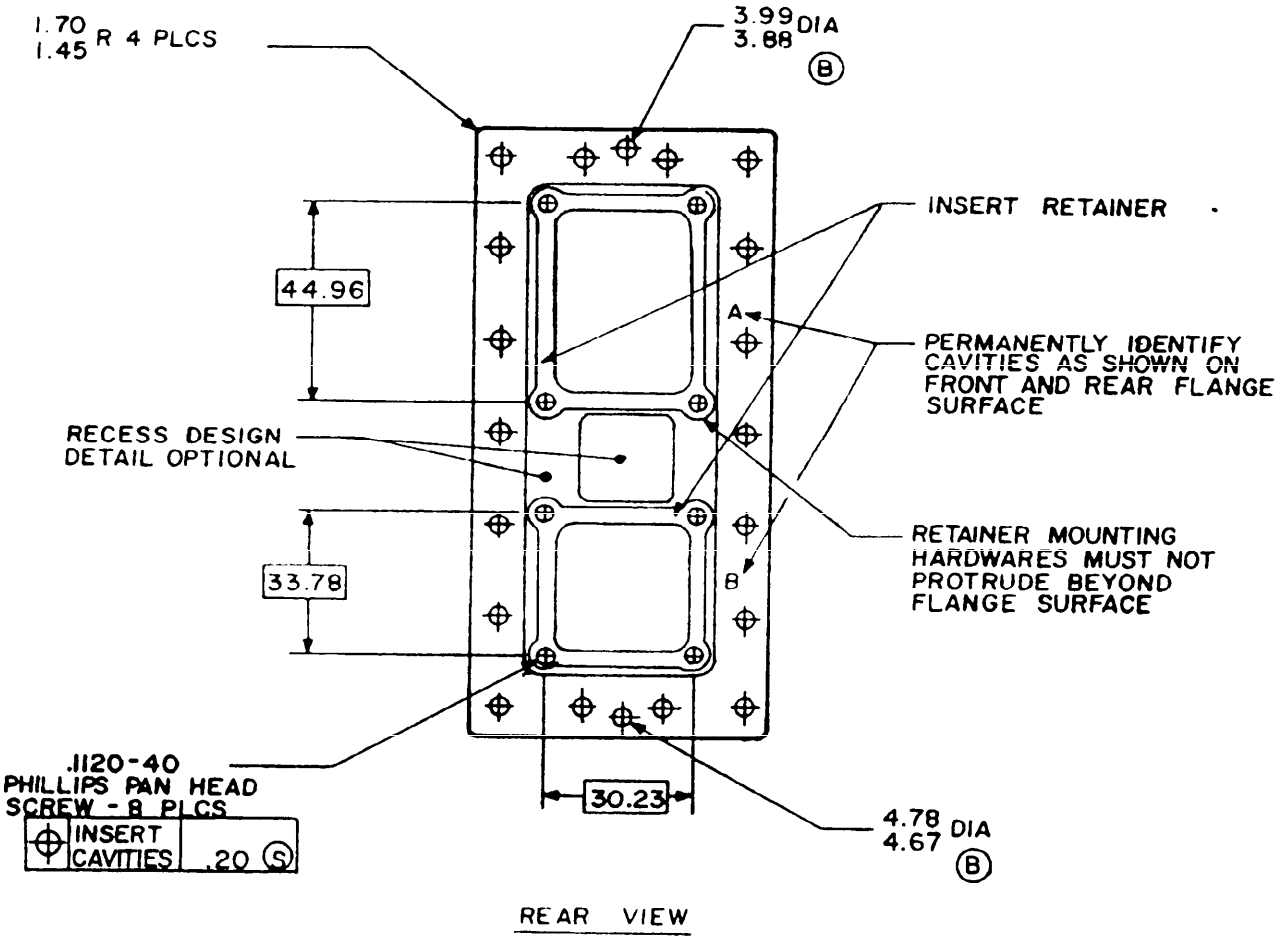


FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

Datum T	Datum S		
	100.66 (3.963)	100.66 (3.962)	100.66 (3.961)
32.79 (1.291)	0.30 (.012)	0.30 (.012)	0.30 (.012)
32.77 (1.290)	0.28 (.011)	0.28 (.011)	0.28 (.011)
32.74 (1.289)	0.25 (.010)	0.25 (.010)	0.25 (.010)
33.72 (1.288)	0.23 (.009)	0.23 (.009)	0.23 (.009)
32.69 (1.287)	0.20 (.008)	0.20 (.008)	0.20 (.008)
100.58 (3.960)	100.56 (3.959)	100.53 (3.958)	100.51 (3.957)
Datum S			
0.28 (.011)	0.25 (.010)	0.23 (.009)	0.20 (.008)
0.25 (.010)	0.23 (.009)	0.23 (.009)	0.20 (.008)
0.23 (.009)	0.23 (.009)	0.20 (.008)	0.18 (.007)
0.23 (.009)	0.20 (.008)	0.18 (.007)	0.18 (.007)
0.20 (.008)	0.18 (.007)	0.18 (.007)	0.15 (.006)

FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

mm	Inch	mm	Inch	mm	Inch	mm	Inch
0.15	.006	3.07	.120	13.54	.533	40.39	1.590
0.18	.007	3.71	.146	14.05	.553	41.02	1.615
0.20	.008	3.88	.153	16.10	.634	41.88	1.649
0.25	.010	3.91	.154	17.91	.705	42.14	1.659
0.30	.012	3.96	.156	18.67	.735	45.14	1.777
0.38	.015	3.99	.157	19.18	.755	45.24	1.781
0.58	.023	4.67	.184	20.70	.815	54.79	2.236
0.76	.030	4.70	.185	21.08	.830	57.30	2.256
1.02	.040	4.78	.188	24.76	.975	60.96	2.4
1.45	.057	4.93	.194	27.69	1.090	80.90	3.185
1.70	.067	5.13	.202	27.74	1.092	100.51	3.957
1.78	.070	5.18	.204	28.24	1.112	100.61	3.961
1.83	.072	5.44	.214	32.69	1.287	100.66	3.963
1.80	.074	5.46	.215	32.79	1.291	100.71	3.965
2.03	.080	5.84	.230	33.27	1.310	100.84	3.970
2.16	.085	5.94	.234	33.76	1.329	109.88	4.326
2.54	.1	8.26	.325	33.96	1.337	110.13	4.336
2.62	.103	10.80	.425	34.06	1.341	120.09	4.728
2.67	.105	12.78	.503	34.46	1.357	120.19	4.732
		13.28	.523			130.81	5.15
						131.32	5.170

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for general information only.

FIGURE 1. Connector, plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See MIL-C-39029/93, /94, /95, /98, and /100.

Inserts: See MIL-STD-1842 and MIL-C-83527/7.

Mating connector: See MIL-C-83527/2.

Military Part or Identifying Number (PIN):

M83527	/01-	A	002
Basic specification identifier			
	Specification sheet number		
		See footnote 1/	
			Insert designator from DOD-STD-1842

1/ "A" designator for insert with contacts, "B" designator for insert without contacts.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3802-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:38Z
Check the source to verify that this is the current version before use.