MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, THREADED COUPLING, CRIMP PIN CONTACT), (SERIES III, CLASSES A, G, K, N, R, S, AND W)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-83723.

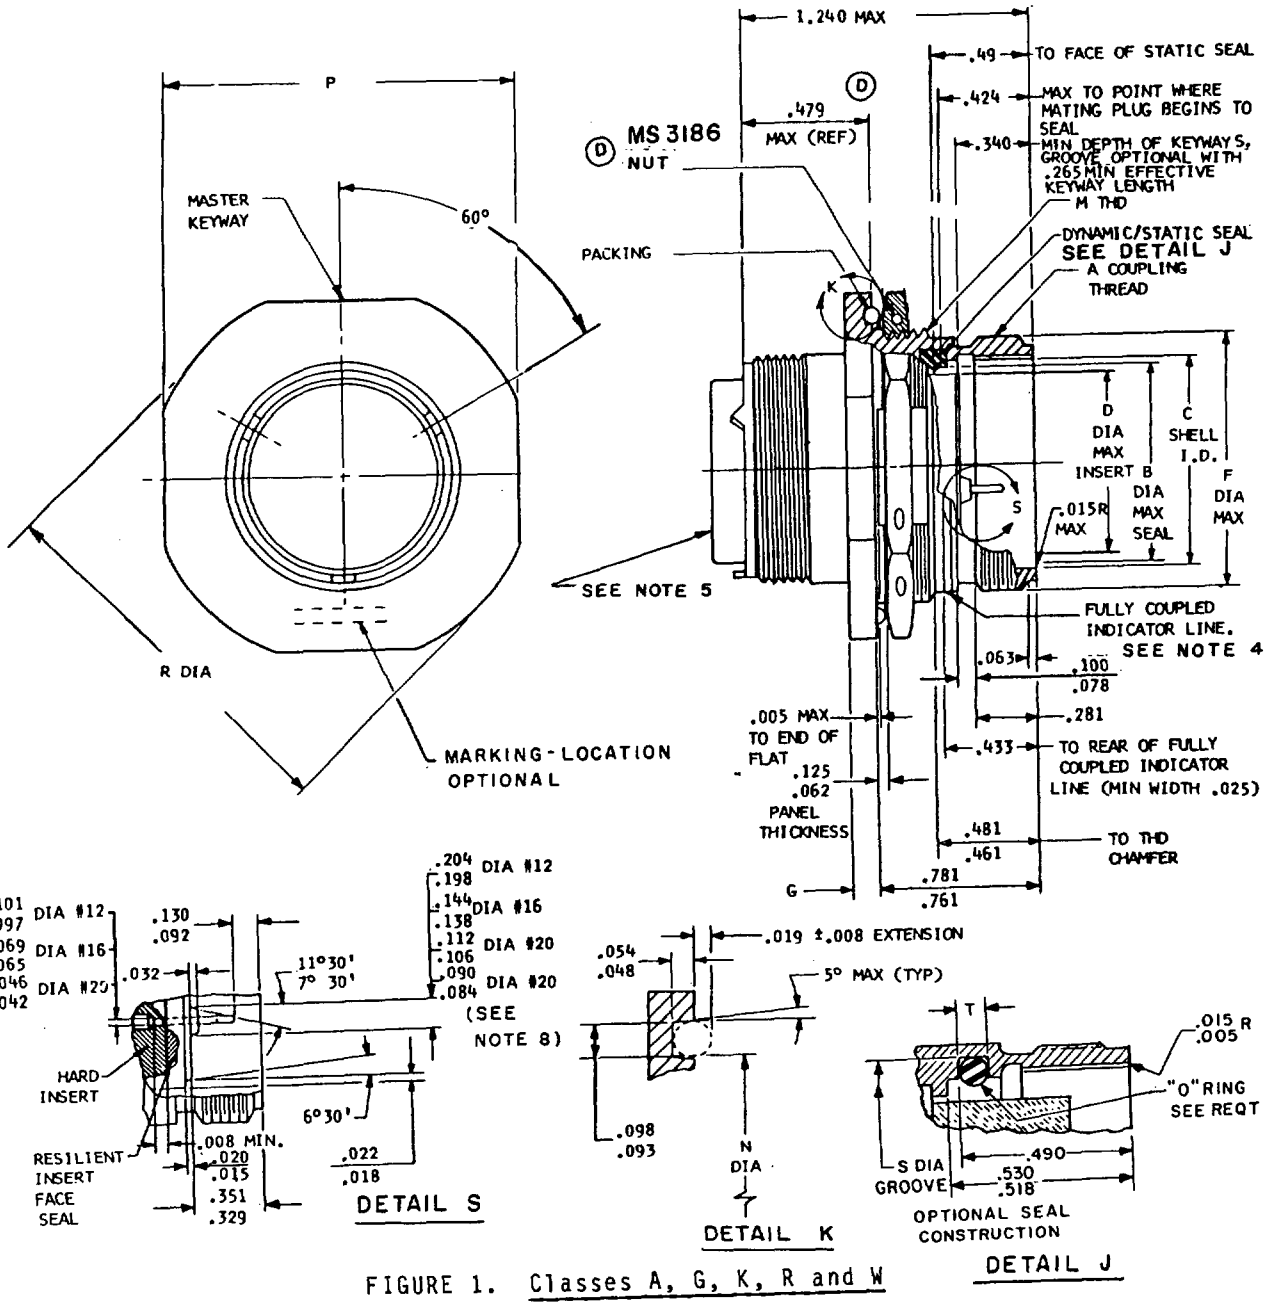


FIGURE 1. Classes A, G, K, R and W

(D) denotes changes

FSC 5935

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

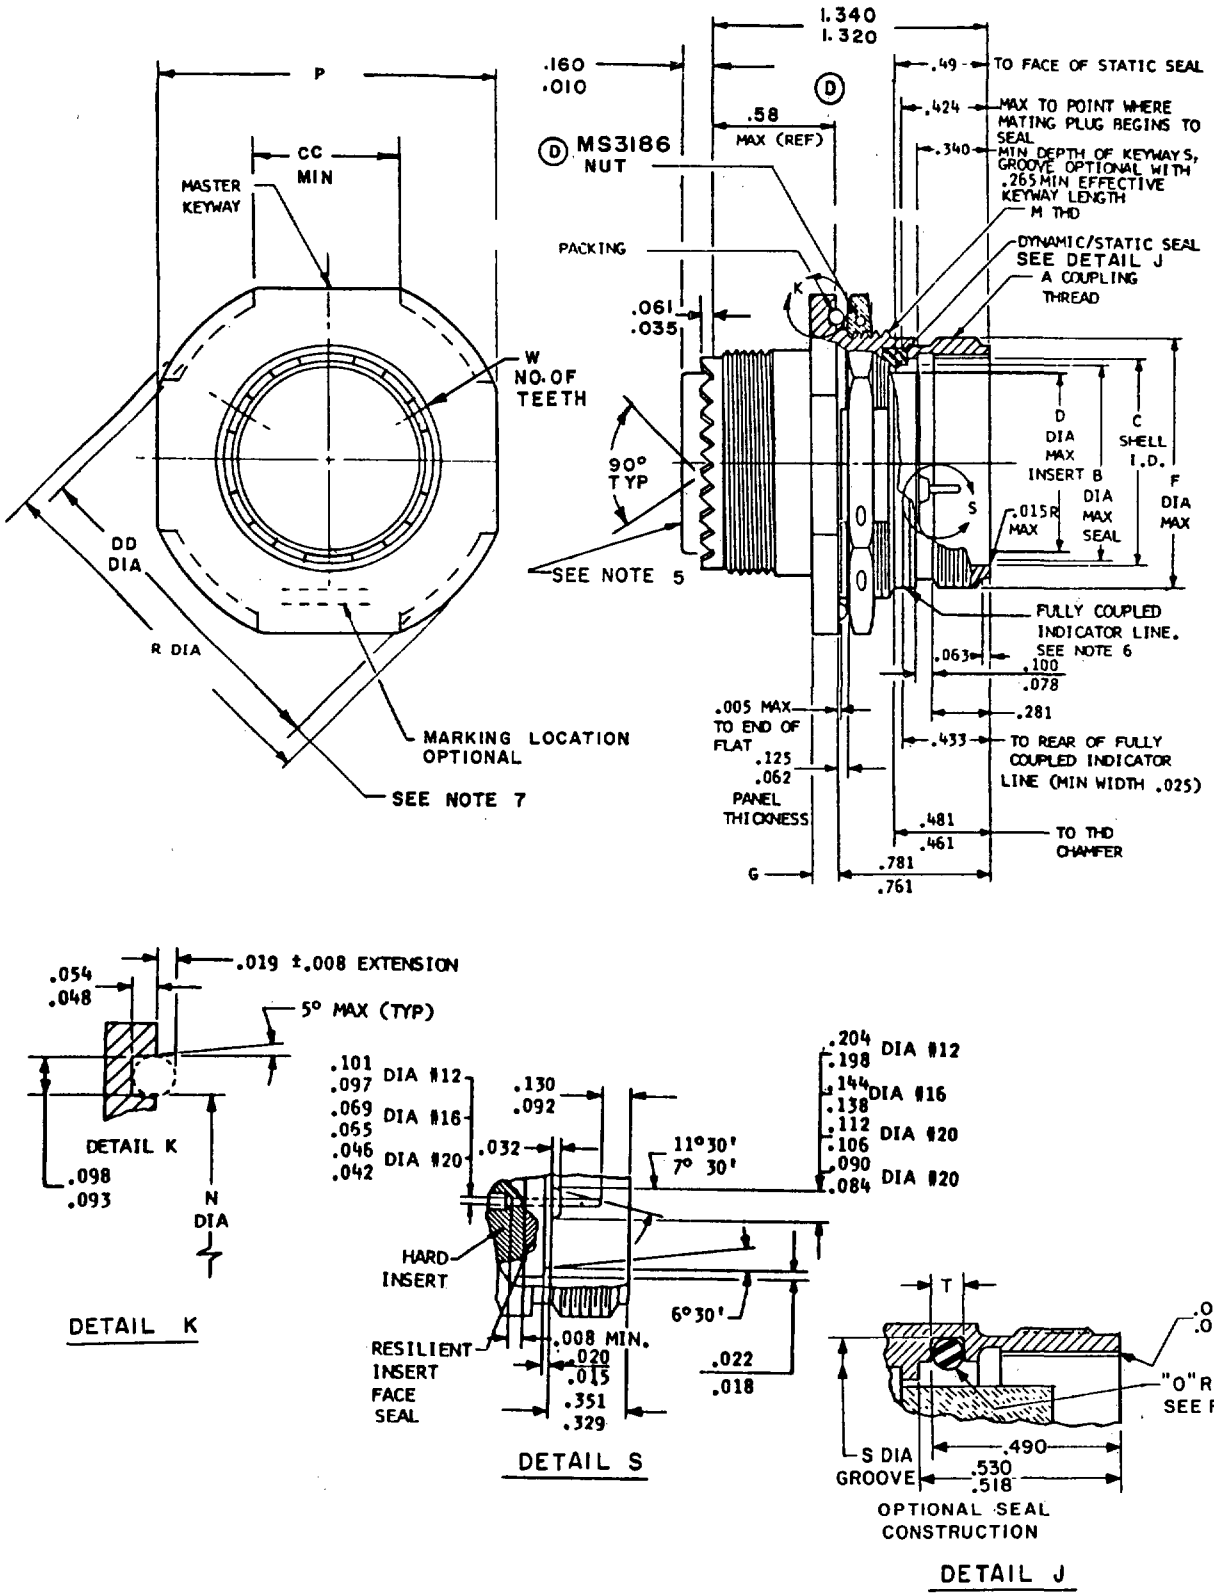


FIGURE 2. Classes N and S.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Connector dimensions.


Shell size	A thread	B	C	D	F	G	M thread	N	P	R	S +.005 -.000	T
8	.562-24 UNEF-2A	.398	.418 .413	.290	.562	.137 .097	.625-20 UN-2A	.670	.980 .949	1.078 1.047	.490	.076 .071
10	.688-24 UNEF-2A	.519	.535 .530	.388	.696	.137 .097	.750-20 UNEF-2A	.796	1.104 1.073	1.192 1.161	.636	.089 .084
12	.875-20 UNEF-2A	.689	.705 .700	.558	.875	.137 .097	.938-20 UNEF-2A	.984	1.291 1.260	1.380 1.349	.806	"
14	.938-20 UNEF-2A	.758	.774 .769	.627	.936	.137 .097	1.000-20 UNEF-2A	1.046	1.391 1.360	1.516 1.485	.875	"
16	1.062-18 UNEF-2A	.885	.901 .896	.772	1.062	.137 .097	1.125-18 UNEF-2A	1.171	1.516 1.485	1.641 1.610	1.002	"
18	1.188-18 UNEF-2A	.991	1.007 1.002	.860	1.187	.137 .097	1.250-18 UNEF-2A	1.296	1.641 1.610	1.766 1.735	1.108	"
20	1.312-18 UNEF-2A	1.116	1.132 1.127	.985	1.312	.137 .097	1.375-18 UNEF-2A	1.482	1.766 1.735	1.954 1.923	1.233	"
22	1.438-18 UNEF-2A	1.241	1.257 1.252	1.110	1.437	.148 .128	1.500-18 UNEF-2A	1.609	1.954 1.923	2.078 2.047	1.358	"
24	1.562-18 UNEF-2A	1.366	1.382 1.377	1.235	1.562	.168 .128	1.625-18 UNEF-2A	1.732	2.079 2.048	2.182 2.152	1.483	.089 .084

FIGURE 3. Dimensions and configurations

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.



PANEL CUTOUT

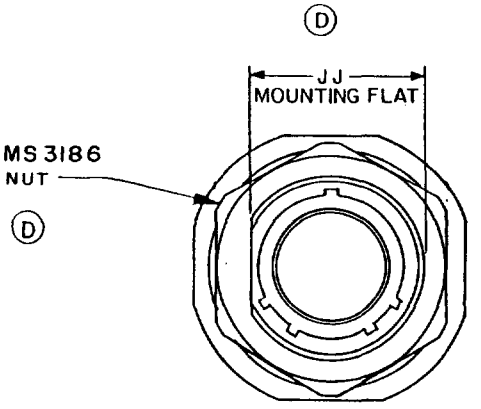

Ⓓ Connector dimensions - Continued.

Shell size	W	FF	EE	CC	DD	JJ
8	12	.635	.605	.443	.991	.596 .590
10	15	.760	.730	.443	1.107	.721 .715
12	21	.947	.917	.482	1.295	.908 .902
14	24	1.010	.980	.596	1.357	.971 .965
16	30	1.135	1.105	.622	1.482	1.096 1.090
18	33	1.260	1.229	.646	1.607	1.220 1.214
20	36	1.385	1.354	.648	1.795	1.345 1.339
22	39	1.510	1.479	.701	1.920	1.470 1.464
24	42	1.635	1.604	.726	2.045	1.595 1.589

FIGURE 3. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	.13	.204	5.18	.715	18.15	1.096	27.84	1.385	35.18
.008	.20	.265	6.73	.721	18.31	1.104	28.04	1.391	35.33
.010	.25	.281	7.14	.726	18.44	1.105	28.07	1.421	36.09
.015	.38	.290	7.37	.730	18.54	1.107	28.12	1.437	36.50
.018	.46	.329	8.36	.758	19.25	1.108	28.14	1.455	36.96
.019	.48	.340	8.64	.760	19.30	1.110	28.19	1.464	37.19
.020	.51	.351	8.92	.761	19.33	1.116	28.35	1.470	37.34
.022	.56	.388	9.86	.769	19.53	1.127	28.63	1.479	37.57
.025	.64	.398	10.11	.772	19.61	1.132	28.75	1.482	37.64
.032	.81	.413	10.49	.774	19.66	1.135	28.83	1.483	37.67
.035	.89	.418	10.62	.781	19.84	1.142	29.01	1.485	37.72
.042	1.07	.424	10.77	.795	20.19	1.161	29.49	1.510	38.35
.046	1.17	.433	11.00	.796	20.22	1.171	29.74	1.516	38.51
.048	1.22	.443	11.25	.806	20.47	1.187	30.15	1.545	39.24
.054	1.37	.461	11.71	.829	21.06	1.192	30.28	1.562	39.67
.061	1.55	.479	12.17	.860	21.84	1.205	30.61	1.579	40.11
.062	1.57	.481	12.22	.875	22.22	1.214	30.84	1.589	40.36
.063	1.60	.482	12.24	.885	22.48	1.220	30.99	1.595	40.51
.065	1.65	.49	12.4	.896	22.76	1.229	31.22	1.604	40.74
.069	1.75	.490	12.45	.901	22.89	1.233	31.32	1.607	40.82
.071	1.80	.508	12.90	.902	22.91	1.235	31.37	1.609	40.87
.076	1.93	.518	13.16	.908	23.06	1.240	31.50	1.610	40.89
.078	1.98	.519	13.18	.917	23.29	1.241	31.52	1.635	41.53
.084	2.13	.526	13.36	.920	23.37	1.252	31.80	1.641	41.68
.089	2.26	.530	13.46	.936	23.77	1.257	31.93	1.671	42.44
.090	2.29	.535	13.59	.947	24.05	1.260	32.00	1.705	43.31
.092	2.34	.558	14.17	.949	24.10	1.291	32.79	1.732	43.99
.093	2.36	.562	14.27	.954	24.23	1.295	32.89	1.735	44.07
.096	2.46	.58	14.7	.956	24.28	1.296	32.92	1.766	44.86
.098	2.49	.590	14.99	.965	24.51	1.312	33.32	1.795	45.59
.100	2.54	.596	15.14	.971	24.66	1.320	33.53	1.829	46.46
.101	2.57	.605	15.37	.980	24.89	1.329	33.76	1.920	48.77
.106	2.69	.622	15.80	.984	24.99	1.339	34.01	1.923	48.84
.109	2.77	.627	15.93	.985	25.02	1.340	34.04	1.954	49.63
.125	3.18	.635	16.13	.991	25.17	1.345	34.16	1.994	50.65
.128	3.25	.636	16.15	1.002	25.45	1.349	34.26	2.045	51.94
.130	3.30	.646	16.41	1.007	25.58	1.354	34.39	2.047	51.99
.137	3.48	.670	17.02	1.010	25.65	1.357	34.47	2.048	52.02
.138	3.51	.684	17.37	1.046	26.57	1.358	34.49	2.078	52.78
.144	3.66	.689	17.50	1.047	26.59	1.360	34.54	2.079	52.81
.148	3.76	.696	17.68	1.062	26.97	1.366	34.70	2.152	54.66
.160	4.06	.700	17.78	1.073	27.25	1.377	34.98	2.182	55.42
.168	4.27	.701	17.81	1.078	27.38	1.380	35.05		
.198	3.03	.705	17.91	1.090	27.69	1.382	35.10		

FIGURE 3. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals. Angles ±1°.
4. The dimensions showning relationship of coupling ring to shell apply only when coupling ring is in the fully forward position. Coupling indicator line shall be color coded blue.
5. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723.
6. Shell size 8 will not mate with MIL-C-26500 connectors.
7. Phantomed configuration optional.
8. See table I for contact cavities requiring this dimension.

FIGURE 3. Dimensions and configurations - Continued.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	-3	1, 2, and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figures 1 and 3 for classes A, G, K, R, and W. See figures 2 and 3 for classes N and S.

This connector mates with MIL-C-83723/86, MIL-C-83723/91, MIL-C-83723/95, and MIL-C-83723/97.

Insert arrangements: See MIL-STD-1554 and table I.

"O" ring: See MIL-C-83723.

Part number example:

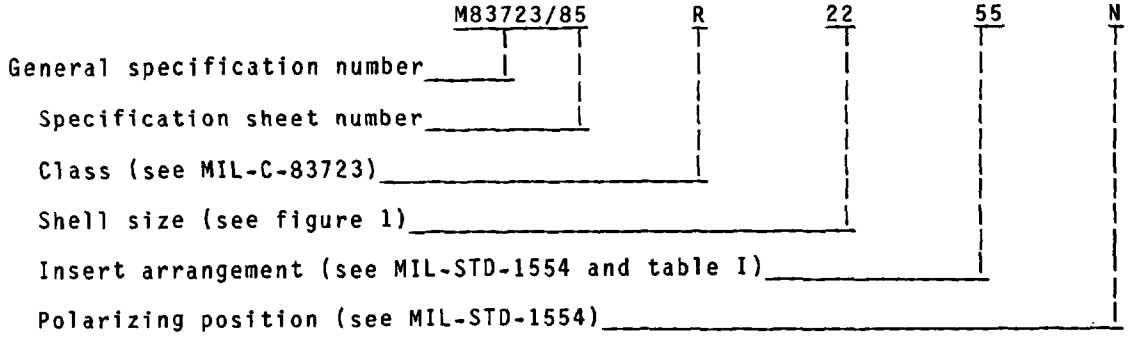

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3559-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:23Z
Check the source to verify that this is the current version before use.