MIL-S-85069/4A
30 October 1980
SUPERSEDING
MIL-S-85069/4
15 July 1978

MILITARY SPECIFICATION SHEET

SLEEVES, FASTENER, GROOVED, 100° FLUSH HEAD, 1/64 OVERSIZE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the sleeves described herein shall consist of this document and the latest issue of MIL-S-85069.

DESIGN INFORMATION

Sleeves covered by this specification sheet are for use in the repair of discrepant holes and in new design where the holes require protection.
The sleeves are subject to the limitations of MIL-S-85069/1.


REQUIREMENTS

MATERIAL: A286 per AMS5525 (Stainless Steel)

LUBRICATION: Cetyl Alcohol or bare /5\

PROTECTIVE TREATMENT: Passivated per QQ-P-35

PLATING: Cadmium per QQ-P-416, Type II, Class 2 exterior only (for identification). Flash plating on bore acceptable. 5

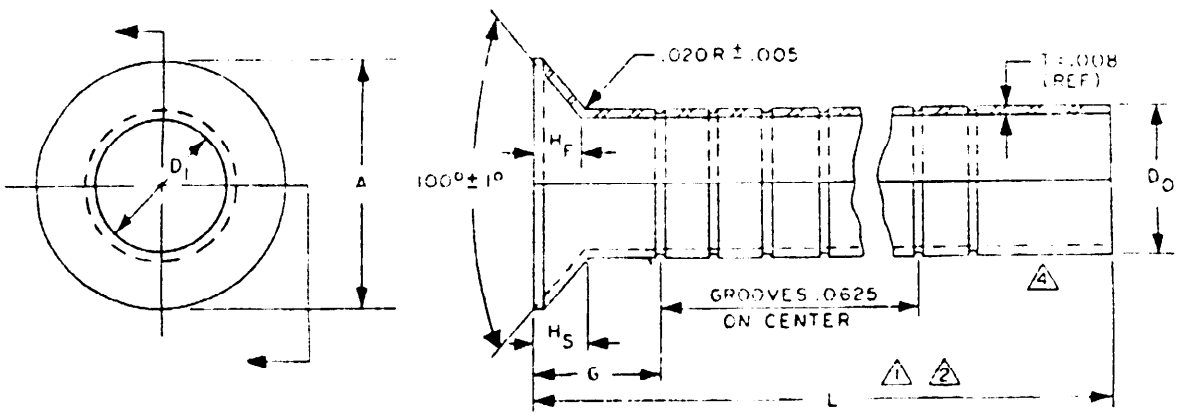

FSC 5365

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

DASH NO.	FOR FAST. SIZE	A DIA. ±.005	D_I DIA.	D_O DIA.	G	H_F HEAD HEIGHT FAST. (REF)	H_S HEAD HEIGHT SLEEVE (REF)	L ±.010	RECOM. (3) HOLE PREP. DRILL NO.	RECOM. (3) HOLE PREP. DRILL DIA.
05	5/32	.282	.1565 / .1550	.1730 / .1720	.125	.053	.058	.750	17	.1730
55	#8	.294	.1635 / .1620	.1800 / .1790	.125	.055	.060	.750	15	.1800
06	#10	.347	.1895 / .1880	.2055 / .2045	.125	.071	.076	1.00	5	.2055
08	1/4	.470	.2495 / .2480	.2656 / .2646	.188	.098	.103	1.00	17/64	.2656
10	5/16	.558	.3120 / .3105	.3281 / .3271	.250	.109	.114	1.00	21/64	.3281
12	3/8	.688	.3745 / .3730	.3906 / .3896	.312	.137	.142	1.00	25/64	.3906

NOTES:

(1) Dimensions are in inches.

(2) Sleeves supplied in standard lengths - adjust to required length when needed.

(3) Recommended for metal-to-metal to clearance fit of sleeve to hole.


(4) Sleeves 55 ungrooved last 3/16
Sleeves 06-08 ungrooved last 1/4
Sleeves 10-12 ungrooved last 5/16

(5) L after part number designates lubricated with cetyl alcohol-B = No Lubrication

P after slash number designates cadmium plated - per QQ-P-416, Type II, Class 2
N after slash number designates no finish except passivated per QQ-P-35.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

EXAMPLE OF PART NUMBER

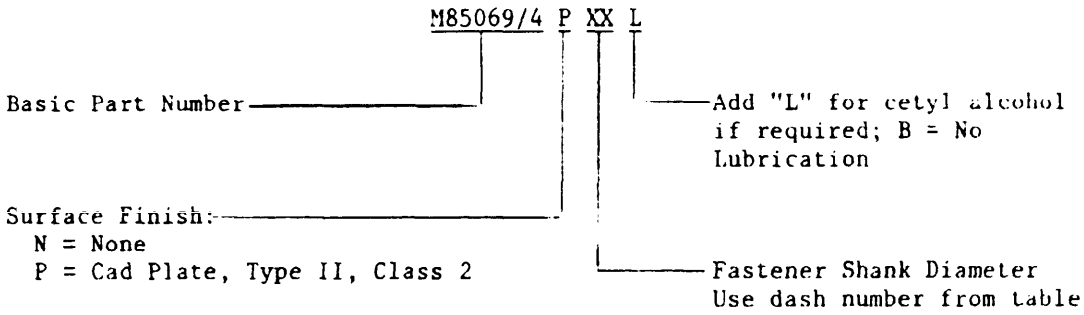

The sleeves covered by this specification are manufactured under United States Patent numbers 3835615 and 3835525. Both patents expire on 9/1/91. The Government does not have a Royalty-Free license.

Custodians:
Navy - AS
Air Force - 11
Army - AV

Review Activities:
DLA-IS
Air Force - 99
Army - AR

Preparing Activity:
Navy - AS
(Project No. 5364-0048-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-85069/4A Sleeves, Fastener, Grooved, 100° Flush Head, 1/64 oversize

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202640-23T10:19Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Code 9311
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T10:19Z
Check the source to verify that this is the current version before use.