METRIC
MIL-PRF-85045/18D
5 November 2021
SUPERSEDING
MIL-PRF-85045/18C
17 June 2014

PERFORMANCE SPECIFICATION SHEET

CABLE, FIBER OPTIC, FOUR FIBERS, ENHANCED PERFORMANCE, CABLE CONFIGURATION TYPE 2 (OFCC), APPLICATION B (SHIPBOARD), CABLE CLASS SM AND MM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-85045.

CLASSIFICATION:

Fiber optic cable configuration type: 2 (optical fiber cable component [OFCC])

Fiber optic cable class: MM (graded-index, glass core and glass cladding, multimode)

SM (dispersion-unshifted, glass core and glass cladding, single-mode)

DESIGN AND CONSTRUCTION:

Fiber: Class MM fibers shall be in accordance with MIL-PRF-49291/6.

Class SM fibers shall be in accordance with MIL-PRF-49291/7.

Buffer diameter: 900±50 micrometers (µm)

OFCC:

Dimensions and configuration: See figure 1.

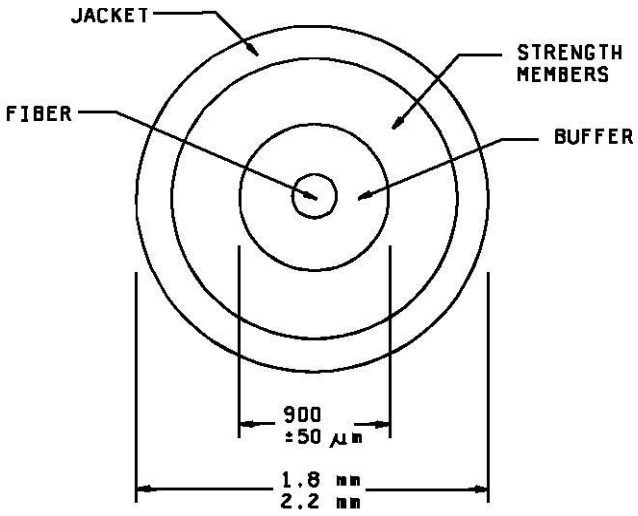


FIGURE 1. OFCC.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

Mass per unit length: <15 kilograms per kilometer (kg/km)

Short-term minimum bend diameter: Eight times the OFCC outer diameter.

Long-term minimum bend diameter: Sixteen times the OFCC outer diameter.

Tensile loading: >270 newtons (N)

Dynamic bend tensile load: 90 N minimum

Jacket material: The OFCC jacket shall be composed of a low-halogen, low-smoke, low-toxicity polymer material.

Finished cable:

Dimensions and configuration: See figure 2. Four OFCC units shall be helically laid over the central member with a maximum lay of 25 centimeters (cm). The minimum outer jacket thickness shall be not less than 1.0 millimeter (mm) (establishes compatibility with termination and penetration devices).

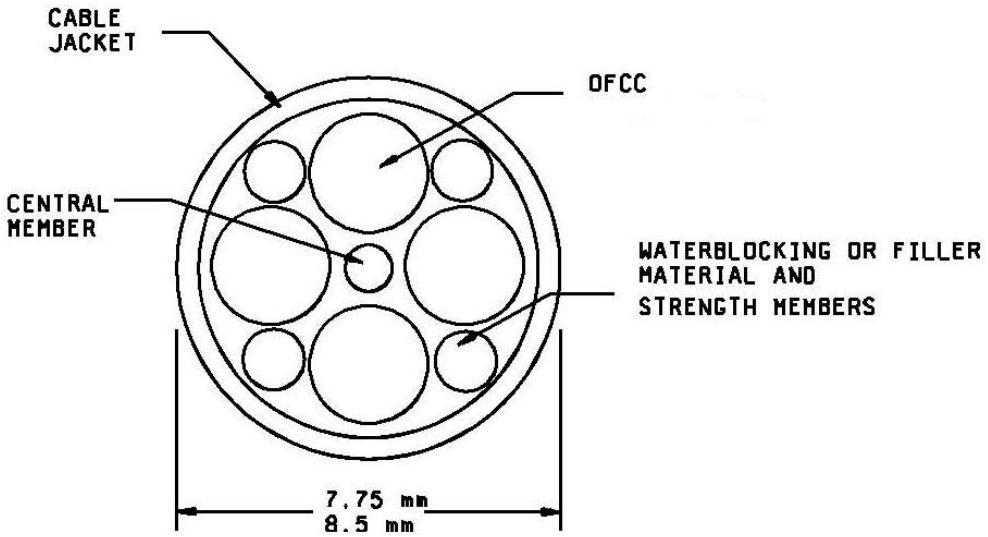


FIGURE 2. Four-OFCC fiber optic cable.

Number of fibers: Four (one per OFCC)

Concentricity: >0.8

Mass per unit length: <100 kg/km

Short-term minimum bend diameter: Eight times the cable outer diameter. (The short-term minimum bend diameter shall be used in all environmental and mechanical tests that specify a cable minimum bend diameter.)

Long-term minimum bend diameter: Sixteen times the cable outer diameter.

Cable jacket color: The cable jacket shall be black or blue.

Jacket material: The overall jacket shall be composed of a low-halogen, low-smoke, low-toxicity polymer material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

Minimum continuous length: The minimum continuous length of all cables shall be not less than 0.5 km. If lengths less than 0.5 km are specified in the purchase order, a conformance inspection shall be performed on test specimens not less than 0.5 km in length from which the purchase order lengths are cut.

PERFORMANCE REQUIREMENTS: The individual performance requirements shall be as specified in MIL-PRF-85045 and this specification sheet, including the requirements identified in table II.

Optical properties:

Maximum attenuation rate: 4.5 decibels per kilometer (dB/km) at 850±20 nanometers (nm), 2.0 dB/km 1,300±20 nm for class MM fiber.

1.5 dB/km at 1,310±20 nm and 1,550±20 nm for class SM fiber.

For cables with radiation cross-linked jackets, the change in attenuation rate measurement may be made up to 30 days after cross-linking of the cable jacket.

Bandwidth: Fiber with a minimum bandwidth of 500 megahertz (MHz)-km at 1,300 nm shall be used (multimode cables only). Bandwidth is not specified at 850 nm.

Change in optical transmittance: Measurements shall be made at 1,300±20 nm.

Mechanical properties:

Tensile loading and elongation: Applicable; tensile loading >1,875 N.

Low temperature flexibility: The exposure temperature shall be -40 °C.

Cyclic flexing: 500 cycles at 25±2 °C and 100 cycles at -28±2 °C. Change in optical transmittance measurements shall be made every 100 cycles for the 500-cycle exposure and every 25 cycles for the 100-cycle exposure. Each change in optical transmittance measurement shall be performed with the test specimen in the same position in the test cycle. The cycling may be halted to perform the change in optical transmittance measurement.

Cable twist-bending: 500 cycles at 25±2 °C and 100 cycles at -28±2 °C. Change in optical transmittance measurements shall be made every 100 cycles for the 500-cycle exposure and every 25 cycles for the 100-cycle exposure. Each change in optical transmittance measurement shall be performed with the test specimen in the same position in the test cycle. The cycling may be halted to perform the change in optical transmittance measurement.

Hosing: Both low pressure and hydrostatic pressure are applicable.

Hydrostatic: 7.7 megapascals (MPa) for M85045/18-01P and M85045/18-02P.

Cable scraping resistance: 750 cycles

Cable-to-cable abrasion: 500 cycles

Environmental properties:

Temperature range:

Operating: -28 to 65 °C

Nonoperating: -40 to 70 °C

Storage: -40 to 70 °C

Temperature cycling: Change in optical transmittance measurements may be made periodically. At a minimum, one optical transmittance measurement shall be made over a period of 1 hour at the end of each temperature plateau.

Temperature humidity cycling: Change in optical transmittance measurements may be made periodically. At a minimum, one optical transmittance measurement shall be made at the end of each temperature plateau.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

Temperature life (life aging): Applicable, except that the jacket material shall be tested at 175 °C for 4 hours.

Fluid immersion: Exposure to automobile gasoline and tap water are not required and the following test temperatures shall be used for the fluids indicated: fuel oil (98 to 100 °C), turbine fuel (48 to 50 °C), and lubricating oil (98 to 100 °C).

Chemical properties:

Halogen content: <0.2 percent

Cross-link verification: This test is applicable for cables with cross-linked jackets only. The test shall be conducted in accordance with ICEA standard T-28-562 and run at 200 °C. The test shall be in the qualification test sequence using a specimen cut from the sample used in the thermal shock test and in the Group III testing of the Group C conformance test sequence. The hot creep shall not exceed 100 percent, and the hot creep set shall not exceed 10 percent.

Part or identifying number (PIN) (see table I):

M85045/18-01P (Multimode)

M85045/18-02P (Single-mode)

"P" designates 7.7-Mpa hydrostatic pressure-proof cable.

TABLE I. Supersession data.

PIN	Superseding
M85045/18-01P	M85045/15-01P
	M85045/18-01
	M85045/18-01N
	M85045/18-01T
M85045/18-02P	M85045/15-02P
	M85045/18-02
	M85045/18-02N
	M85045/18-02T

Qualification and conformance inspection: See table II. This table specifies applicable requirements, qualification inspection, and conformance inspection per this specification sheet. The Requirement Paragraph and Test Paragraph columns within this table reference MIL-PRF-85045. The Cable Length column of this table applies only to the qualification inspection. A reduced sample set is allowed for conformance inspection; refer to MIL-PRF-85045 for conformance inspection sample size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification and conformance inspection.

Group	Qualification inspection	Requirement paragraph	Test paragraph	Cable length [1/, 2/]	Conformance inspection
I	Visual and mechanical inspection	3.4, 3.9, 3.10	4.7.2	Three samples, 0.5 km each [3/]	A
	Attenuation rate	3.5.1	4.7.4.1	Three samples, 0.5 km each [4/]	A
II	Crosstalk	3.5.3	4.7.4.3	Three samples, 0.5 km each [4/]	--
	Electromagnetic effects	3.7.16	4.7.6.16	One specimen, 6 m [4/]	--
III	Temperature cycling	3.7.1	[5/]	Two samples, 0.5 km each [4/] (One on reel, one off)	C
	Temperature humidity cycling	3.7.3	4.7.6.3	Two samples, 0.5 km each [6/]	C
	Storage temperature	3.7.4	4.7.6.4	Two samples, 0.5 km each [6/]	--
	Low temperature flexibility (cold bend)	3.6.3	4.7.5.3	Two specimens, 8 m each [7/]	B
	Cyclic flexing	3.6.4	4.7.5.4	Four specimens, 5 m each [8/] (two specimens at each temperature)	--
	Crush	3.6.5	4.7.5.5	Two specimens, 5 m each [7/]	--
	Cable twist-bend	3.6.6	4.7.5.6	Four specimens, 5 m each [8/] (two specimens at each temperature)	C
	Impact	3.6.8	4.7.5.8	Two specimens, 5 m each [7/]	C
	Temperature life (life aging)	[5/]	[5/]	Two specimens, 300 m each [7/]	C
	Tensile loading and elongation	3.6.1	4.7.5.1	Two specimens, 150 m each [9/]	C
	Operating tensile loading	3.6.1.1	4.7.5.1.1	Two specimens, 150 m each [10/]	C
	Fungus resistance	3.8.4	4.8.4	Two specimens, 0.5 m each [7/]	--
	Cable element removability	3.6.18	4.7.5.18	Two specimens, 0.5 m each [7/]	C
IV	Thermal shock	3.7.2	4.7.6.2	One specimen, 0.49 km each [4/] (on reel)	--
	Weathering	3.7.8	4.7.6.8	One specimen, 2 m [11/] and three material samples [12/]	--
	Fluid immersion	3.7.9	4.7.6.9	One specimen, 2 m [11/] and three material samples [12/] for each specified fluid	C
	Paint susceptibility	3.7.15	4.7.6.15	Two specimens, 2 m each [13/]	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification and conformance inspection – Continued.

Group	Qualification inspection	Requirement paragraph	Test paragraph	Cable length [1/, 2/]	Conformance inspection
IV	Jacket self-adhesion or blocking	3.7.11	4.7.6.11	One specimen, 30 m [11/]	--
	Shock	3.7.13	4.7.6.13	One specimen, 30 m [11/]	--
	Dynamic bend	3.6.2	4.7.5.2	One specimen, 150 m [14/]	B
	Hosing: low pressure	3.6.12.1	4.7.5.12.1	One specimen, 1.5 m [11/]	C
	Hosing: hydrostatic	3.6.12.2	4.7.5.12.2	One specimen, 2 m [11/]	C
	Radial compression (for application B only)	3.6.7	4.7.5.7	One specimen, 10 m [11/]	--
	Corner bend	3.6.9	4.7.5.9	Two specimens, 5 m each [13/]	--
	OFCC kink	[5/]	[5/]	Two specimens, 1 m each [13/]	--
	Cross-link verification	[5/]	[5/]	Two specimens, 1 m each [13/]	C
V	Dripping	3.6.13	4.7.5.13	One specimen, 30 cm [11/]	--
	Cable jacket tear strength	3.6.14	4.7.5.14	Five flat extruded jacket material strips [15/]	C
	Cable jacket material tensile strength and elongation	3.6.15	4.7.5.15	Five specimens [16/]	--
	Cable abrasion resistance	3.6.16	4.7.5.16	Four specimens, 2 m each [17/]	C
	Cable shrinkage	3.6.17	4.7.5.17	Three specimens, 0.5 m each [13/]	C
	Durability of identification	3.6.19	4.7.5.19	Three specimens, 2 m each [13/]	--
	Flame extinguishing and smoke generation	3.7.12.2	4.7.6.12.2	One specimen, 50 m [11/]	C
	Water absorption	3.7.14	4.7.6.14	Two specimens, extruded jacket material strips [16/]	--
VI	Acid gas generation	3.8.1	4.8.1	1 specimen, 1 m [18/]	C
	Halogen content	3.8.2	4.8.2	1 specimen, 1 m [18/]	--
	Toxicity index	3.8.3	4.8.3	1 specimen, 1 m [18/]	C
	Smoke index	3.8.5	4.8.6	1 specimen, 1 m [18/]	C

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification and conformance inspection – Continued.

NOTES:

1/ Tolerance on 0.5-km length is ±5 percent, provided that results are normalized to 1 km.
2/ Tolerance on shorter lengths is ±5 percent.
3/ The visual and mechanical inspection shall only be conducted on a 2-m section of each sample.
4/ The same samples as used in the visual and mechanical inspection shall be used.
5/ As stated under the applicable tests in this specification sheet.
6/ The same samples as used in the temperature cycling test shall be used.
7/ A specimen cut from each sample used in the temperature cycling test shall be used.
8/ Two specimens cut from each sample used in the temperature cycling test shall be used.
9/ A specimen cut from each specimen used in the temperature life test shall be used.
10/ The same specimen as used in the tensile loading and elongation test shall be used.
11/ A specimen cut from the specimen used in the thermal shock test shall be used.
12/ Three flat extruded jacket material strips as specified in 4.7.5.15 shall be used in this test.
13/ Specimens cut from the specimen used in the thermal shock test shall be used.
14/ A specimen cut from the specimen used in the thermal shock test or one of the specimens used in the tensile loading and elongation test shall be used.
15/ Flat extruded jacket material strips (i.e., strips of flat extruded material with the same composition as the cable jacket and of sufficient dimensions in which dumbbells can be cut) prepared as specified in 4.7.5.14 and obtained from flat extruded material that underwent the thermal shock test shall be used.
16/ Flat extruded jacket material as specified in 4.7.5.15 shall be used in this test.
17/ Specimen cut from the specimen used in the thermal shock test shall be used. Two specimens shall be used for scraping abrasion, and two specimens shall be used in the cable-to-cable abrasion testing.
18/ A specimen cut from one of the samples used in the temperature cycling test or specimen used in the thermal shock test shall be used.

Qualification and conformance by similarity to M85045/17-01P: Manufacturers who produce products for both MIL-PRF-85045/17 and this specification sheet, who are qualified under M85045/17-01P, and pass the tests and inspections specified in table III are qualified under this specification sheet for M85045/18-01P. This qualification by similarity is applicable if the same materials are used in the previously qualified MIL-PRF-85045/17 cable and the cable under test. Testing may be performed on a single length of cable with a minimum length of 0.5 km.

TABLE III. Qualification and conformance by similarity to M85045/17-01P.

Group	Inspection	Qualification inspection 1/	Conformance inspection 2/
I	Visual and mechanical	X	A
	Attenuation rate	X	A
III	Low temperature flexibility (cold bend)	X	B
	Impact (low temperature only)	X	C
IV	Hosing: low pressure	X	C
	Cable abrasion resistance	X	C
V	Flame extinguishing and smoke generation	X	C

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

TABLE III. Qualification and conformance by similarity to M85045/17 – Continued.

NOTES:
1/ Where manufacturers are qualified for M85045/17-01P and are pursuing qualification for M85045/18-01P.
2/ Where manufacturers are qualified for M85045/17-01P and M85045/18-01P and have passed the full conformance inspection (A, B, and C) for M85045/17-01P.

Qualification and conformance by similarity – fiber type: Manufacturers who are qualified under this specification sheet for multimode fiber cable, M85045/18-01P, and whose single-mode fiber cable passes the tests and inspections specified in table IV are qualified under this specification sheet for single-mode fiber cable (M85045/18-02P). This qualification by similarity is applicable if the only difference between the previously qualified cable and the cable under test is that the optical fiber has been changed from a multimode fiber to a single-mode fiber. Testing may be performed on either one or two lengths of cable, each with a minimum length of 0.5 km. Test order must be observed up to and including the storage temperature test. If only one cable length is used, the thermal shock test shall be performed after the storage temperature test.

TABLE IV. Qualification and conformance by similarity (fiber).

Group	Inspection	Qualification inspection M85045/18-02P 1/	Conformance inspection M85045/18-02P 2/
I	Visual and mechanical	X	A
	Attenuation rate	X	A
III	Temperature cycling	X	C
	Temperature humidity cycling	X	C
	Storage temperature	X	--
	Cyclic flexing	X	--
	Crush	X	--
	Cable twist-bending	X	C
	Impact (low temperature only)	X	C
	Tensile loading and elongation	X	C
	Operating tensile loading	X	C
IV	Thermal shock	X	--
	Dynamic bend	X	B

NOTES:
1/ Where manufacturers are qualified for M85045/18-01P and are pursuing qualification for M85045/18-02P.
2/ Where manufacturers are qualified for M85045/18-01P and M85045/18-02P and have passed the full conformance inspection (A, B, and C) for M85045/18-01P.

Qualification by similarity for M85045/18-02P to M85045/17-01P, M85045/17-02P, and M85045/18-01P: Manufacturers who are qualified under MIL-PRF-85045/17 for both multimode and single-mode fiber cable and under this specification sheet for multimode fiber cable, and pass the tests and inspections in table V for M85045/18-02P single-mode fiber cable, are qualified under this specification sheet for single-mode fiber cable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.

TABLE V. Qualification and conformance by similarity to M85045/17-01P, M85045/17-02P and M85045/18-01P.

Group	Inspection	Qualification inspection M85045/18-02P [1/]	Conformance inspection M85045/18-02P
I	Visual and mechanical	X	A
	Attenuation rate	X	A
III	Low temperature flexibility (cold bend)	X	B [2/]
	Impact	X	C [2/]
IV	Hosing (low pressure)	X	C [2/]

NOTES:

[1/] Where manufacturers are qualified for M85045/17-01P, M85045/17-02P, and M85045/18-01P and are pursuing qualification for M85045/18-02P.

[2/] Where manufacturers are qualified for M85045/17-01P, M85045/17-02P, M85045/18-01P, and M85045/18-02P and have passed the full conformance inspection (A, B, and C) for M85045/17-01P and partial conformance inspection as specified in table III for M85045/18-01P are considered conforming under this specification sheet for single-mode fiber cable M85045/18-02P with completion of Group A conformance inspection.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 85
NASA – NA

Preparing activity:
Navy – SH
(Project 6015-2020-004)

Review activities:
Army – AR, AV, MI
Navy – EC, YD
Air Force – 02, 19, 70
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:07Z
Check the source to verify that this is the current version before use.