MILITARY SPECIFICATION SHEET

# SWITCHES, DUAL IN-LINE PACKAGE (DIP), SLIDE ACTUATOR, SINGLE POLE, SINGLE THROW STATIONS, OPEN BASE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification sheet and the latest issue of MIL-S-83504.

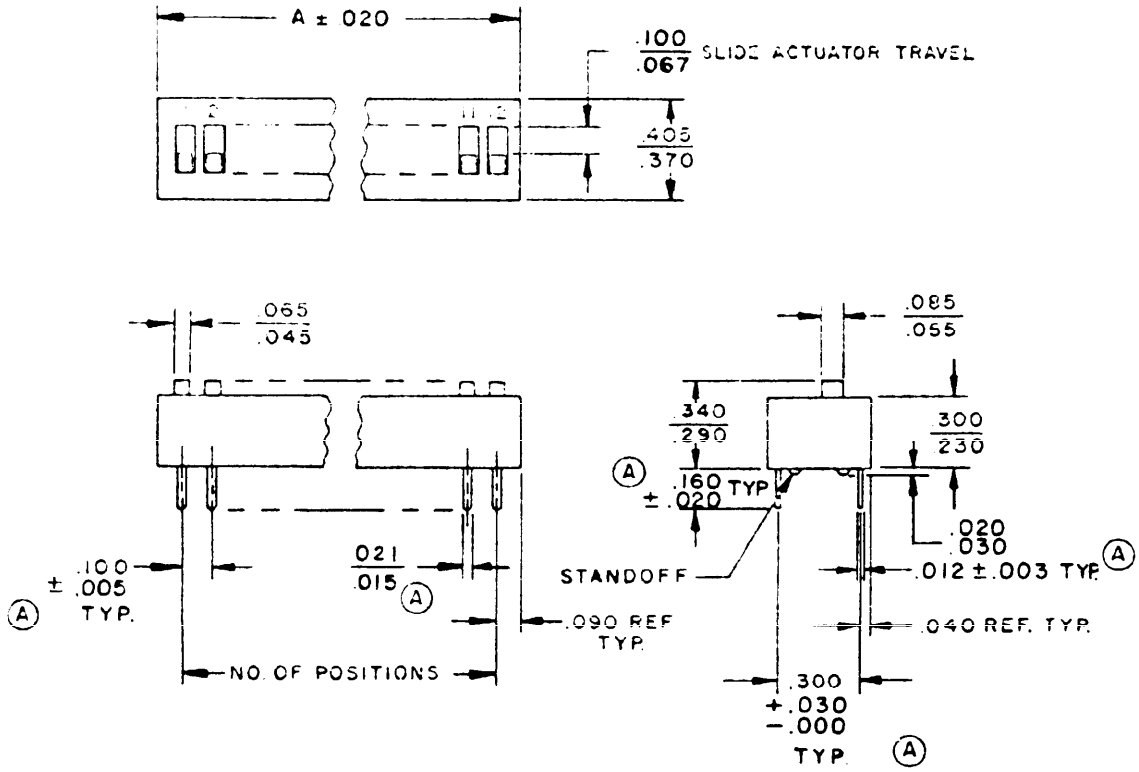



FIGURE 1. Dimensions and configuration.


(A) denotes change



FSC 5930

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:21Z
Check the source to verify that this is the current version before use.

| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .003 | .08 | .067 | 1.70 |
| .005 | .13 | .085 | 2.16 |
| .012 | .30 | .090 | 2.29 |
| .015 | .38 | .100 | 2.54 |
| .020 | .51 | .160 | 4.60 |
| .021 | .53 | .230 | 5.84 |
| .030 | .76 | .290 | 7.37 |
| .040 | 1.02 | .300 | 7.62 |
| .045 | 1.14 | .340 | 8.64 |
| .055 | 1.40 | .370 | 9.40 |
| .065 | 1.65 | .405 | 10.29 |

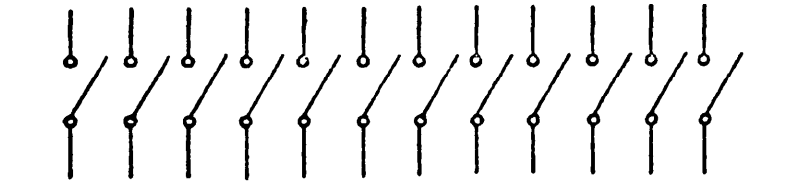

TYPICAL CONTACT CIRCUIT ARRANGEMENT 12 POSITION SWITCH
(CONTACTS SHOWN IN OPEN POSITION)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Each switch station is shown in the "OFF" position. Continuity is established (switch is turned "ON") when the slide actuator is toward the station identification number.
4. Exact shape of switch is optional provided outline dimensions are not exceeded.
5. Each switch position shall be numbered as shown.
6. Design of terminals and standoffs are optional.

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

EMENTS:

erial:

Body and slide actuator: Molded plastic.

Terminal finish: Gold or solderable. Both gold and solderable must meet solderability requirements. See table I.

ensions and configuration: See figure 1 and table I.

Base: Open.

tch position and setting identification: See figure 1.

entation: See figure 1.

rating force: 3-32 ounces.

ctrical ratings: 10 mA maximum at 50 mV, switching (resistive load).
100 mA maximum at 6 Vdc, switching (resistive load).
25 mA maximum at 24 Vdc, switching (resistive load).

lication note: In applications where the switch will mate with sockets or h panel boards, the user should consider the compatibility of the mating minals with respect to finished and mechanical configurations.

t number: M83504/03- (dash number from table I).

TABLE I. Dash numbers and characteristics.

| Dash number | | Number of stations | Dimension "A" inches (mm) |
|---|---|---|---|
| Gold | Solderable | | |
| 001 | 021 | 1 | .280 (7.11) |
| 002 | 022 | 2 | .280 (7.11) |
| 003 | 023 | 3 | .380 (9.65) |
| 004 | 024 | 4 | .480 (12.19) |
| 005 | 025 | 5 | .580 (14.73) |
| 006 | 026 | 6 | .680 (17.27) |
| 007 | 027 | 7 | .780 (19.81) |
| 008 | 028 | 8 | .880 (22.35) |
| 009 | 029 | 9 | .980 (24.89) |
| 010 | 030 | 10 | 1.080 (27.43) |
| 011 | 031 | 11 | 1.180 (29.97) |
| 012 | 032 | 12 | 1.280 (32.51) |

ians:
- ER
- EC
Force - 85

activities:
- AV
- AS
Force - 11, 99
- ES

ity:
- nR

Preparing activity:
Air Force - 85

(Project 5930-1133-3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

L DIZATION DOCUMENT IMPROVEMENT PROPOSAL

RUCTIONS: This form is provided to solicit beneficial comments which may improve this document and ice its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of ocument are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, nd to preparing activity. Attach any pertinent data which may be of use in improving this document. If are additional papers, attach to form and place both in an envelope addressed to preparing activity. A nse will be provided to the submitter, when name and address is provided, within 30 days indicating that 426 was received and when any appropriate action on it will be completed.

2: This form shall not be used to submit requests for waivers, deviations or clarification of specification rements on current contracts. Comments submitted on this form do not constitute or imply authorization ive any portion of the referenced document(s) or to amend contractual requirements.

NT IDENTIFIER (Number) AND TITLE

MIL-S-83504/3A

ORGANIZATION AND ADDRESS OF SUBMITTER

DOR ☐ USER ☐ MANUFACTURER

HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT

☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

VE PARAGRAPH NUMBER AND WORDING

C MENDED WORDING CHANGE

ASON FOR RECOMMENDED CHANGE(S)

RKS

ED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

ORM 1426
CT 76

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 73236 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:21Z
Check the source to verify that this is the current version before use.