MIL-S-58040B(ME)
22 April 1983
SUPERSEDING
MIL-S-58040A(ME)
20 October 1970

MILITARY SPECIFICATION

SLING ASSEMBLY, MULTIPLE DRUM LIFTING

This specification is approved for use by the USA Mobility Equipment Research and Development Commond, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a sling assembly with spreader, for lifting up to 10 drums in a single lift.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel and Seals.
RR-C-271	- Chains and Attachments, Welded and Weldless.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 3940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood Nailed and Lock-Corner.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-P-514	- Plate, Identification, Instruction and Marking, Blank.
MIL-S-13119	- Spreader, Sling: Plate-Type, Nonadjustable.
MIL-S-13153	- Sling, Drum Lifting (Single Drum).
MIL-P-23377	- Primer Coatings: Epoxy-Polyamide, Chemical and Solvent Resistant.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASTM A 153	- Zinc Coating (Hot-Dip) on Iron and Steel Hardware.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The multiple drum lifting sling assembly shall conform to figure 1 and as specified herein. The sling assembly shall consist of a plate type spreader, holding 10 endless chain slings, each equipped with a hookup ring and two sliding barrel hooks and fastened to the spreader with a shackle.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein (see 6.4).

3.3.1 Material deterioration and control. The assembly shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environment to which the item may be exposed.

3.3.2 Dissimilar metals. Dissimilar metals as defined in MIL-STD-889 shall be electrically insulated from one another to minimize galvanic corrosion. Insulation may be provided by a barrier such as a coating of epoxy primer conforming to MIL-P-23377 or corrosion inhibiting sealant conforming to MIL-S-81733. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.4 Spreader. The spreader shall be in accordance with MIL-S-13119.

3.5 Shackles. The shackles shall be forged steel conforming to RR-C-271, type IV. Five shackles shall be class 2, size 3/4 inch; and one shackle shall be class 6, size 1-3/8 inch.

3.6 Slings. Each sling consisting of a chain, a ring, and two barrel hooks shall conform to MIL-S-13153, except that the finished sling shall be galvanized in accordance with ANSI/ASTM A 153, class B1. Hooks shall be large or small, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

3.7 Identification marking. The sling assembly shall be identified in accordance with MIL-STD-130. The marking shall be applied to the sling assembly on a plate conforming to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. The plate shall be attached by screws, bolts, or rivets to the spreader and marking on the plate shall include "SLING ASSEMBLY, MULTIPLE DRUM LIFTING" and "SWL FOR EACH SLING IS 1,350 LBS".

3.8 Interchangeability. All hooks shall be interchangeable without reducing the performance of the sling assembly.

3.9 Performance. The sling assembly shall withstand a proof load of 27,000 pounds (2,700 pounds on each of the 10 slings) without permanent deformation or breakage (see 4.5.2.1).

3.10 Workmanship. All parts, components and assemblies of the sling assembly including machined surfaces and welded parts shall be free from sand, dirt, fins, pits, sprues, scale, flux, and other harmful extraneous material. External surfaces shall be free from burrs, sharp edges and corners.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 Examination. The first article sling assembly shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article sling assembly shall be tested as specified in 4.5.2. Failure of this test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective.

4.4.3 Test. Samples selected in accordance with 4.4.1 shall be tested in accordance with 4.5.2. Failure of this test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The sling assemblies shall be examined as specified herein for the following defects:

101. Materials are not corrosion resistant or treated to be made corrosion resistant for the applicable storage and operating environment.
102. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
103. Sling assembly incomplete.
104. Size of hooks not as specified.
105. Finish not as specified.
106. Identification or special marking missing, incomplete or illegible.
107. Workmanship not as specified.

4.5.2 Test.

4.5.2.1 Proof load. The sling assembly shall be loaded uniformly with 10 drums, each weighing not less than 2,700 pounds or an equivalent simulated load. The angle between the sling legs on each sling shall be not more than 45 degrees and not less than 30 degrees. A hoisting force shall be used on the main shackle to lift the assembly until the load is free from any support. Raise and lower the loaded sling assembly three times and hold in suspension 2 to 3 minutes each time for a total of 8 minutes. Nonconformance to 3.9 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

4.6 Inspection packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

108.	Materials and containers not as specified for level A or B. Each incorrect material or container shall constitute one defect.
109.	Quantities packed together exceed the box limitations for level A or B.
110.	Strapping not as specified for level A.
111.	Preservation and packing not in accordance with the referenced document for commercial.
112.	Marking missing, illegible, incorrect or incomplete for level A, B, or commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Surfaces of the sling assemblies requiring the application of a contact preservative in accordance with MIL-P-116 shall be cleaned, dried, and coated with type P-1 preservative. The preservative shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116.

5.1.2 Commercial. The sling assembly shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. The sling assemblies preserved as specified in 5.1 shall be packed together in close-fitting boxes conforming to PPP-B-601, overseas type, style optional, or PPP-B-621, class 2, style optional, in quantities not to exceed the weight limitation of the box. The contents shall be blocked and braced within the box in a manner to prevent movement. Box closure and strapping shall be in accordance with the appendix to the applicable box specification. Strapping shall conform to QQ-S-781, class 1, type I or IV, size as applicable. Unless otherwise specified (see 6.2), strapping shall be finish B. When specified (see 6.2), strapping shall be finish A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. The sling assemblies preserved as specified in 5.1 shall be packed as specified in 5.2.1 for level A except the boxes shall be domestic type or class as applicable. Box closure and strapping shall be in accordance with the appendix to the applicable box specification.

5.2.3 Commercial. The sling assemblies preserved as specified in 5.1 shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial packaging shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The multiple drum lifting sling assembly is intended to facilitate stevedoring operations by lifting as many as 10 drums simultaneously.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When a first article is required for inspection and approval and the number of units required (see 3.2).

c. Size of hook required (see 3.6).

d. Degree of preservation and degree of packing required (see 5.1 and 5.2).

e. When other than finish B strapping is required (see 5.2.1).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first produced model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test, and approval of the first article.

6.4 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

Custodian:
Army - ME

User activity:
Army - MT

Preparing activity:
Army - ME

Project 3940-A033

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

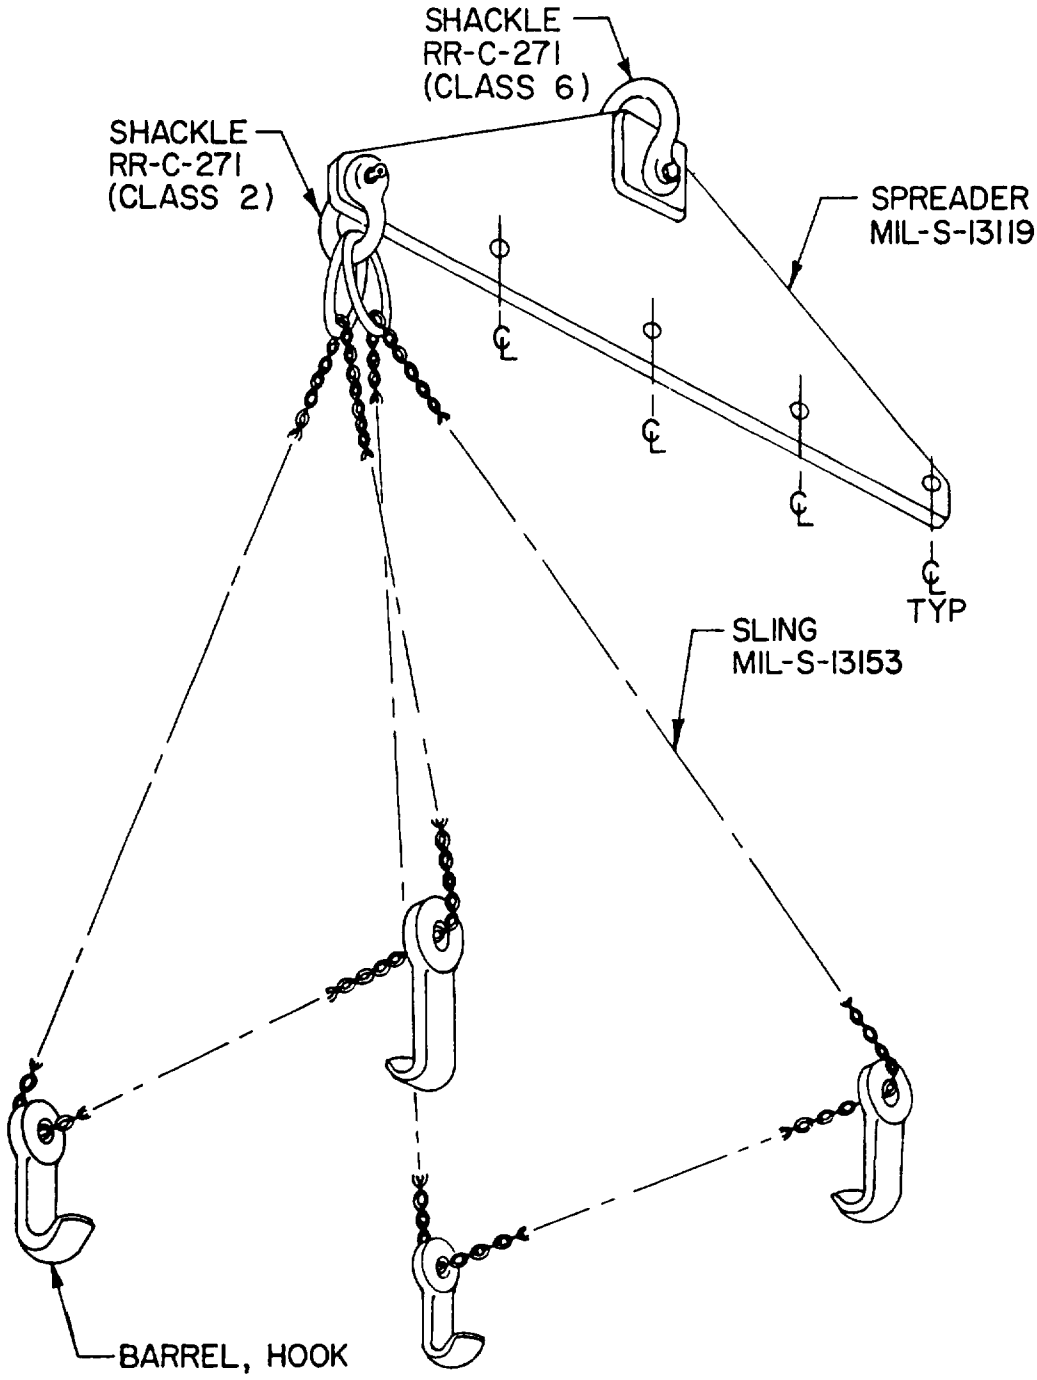


FIGURE 1. Sling assembly, multiple drum lifting.

X1985B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

USAMERADCOM
DRDME-DS
Ft. Belvoir, VA 22060

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. [illegible] WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research and
Development Command
DRDME-DS
Ft. Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-58040B(ME)	Sling Assembly, Multiple Drum Lifting

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.