[INCH-POUND]

A-A-55763
13 September 1995
SUPERSEDING
ZZ-R-765/19
11 April 1991

COMMERCIAL ITEM DESCRIPTION

RUBBER, SILICONE; NONMETALLIC, SPECIAL SHAPED SECTION 19

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for ZZ-R-765/19, which is cancelled.

1. SCOPE. This description covers a silicone rubber, special shaped section of various classes and grades.

2. CLASSIFICATION. The silicone rubber shall be of the following classes and grades as specified. The designated grade number corresponds to the nominal Shore Durometer A hardness value.

Class 1A - Low temperature resistant
Grade - 40, 50, 60, 70 and 80

Class 1B - Low temperature resistant and low compression set at high temperature
Grade - 40, 50, 60, 70 and 80

Class 2A - High temperature resistant
Grade - 25, 40, 50, 60, 70 and 80

Class 2B - High temperature resistant and low compression set
Grade - 25, 40, 50, 60, 70 and 80

Class 3A - Low temperature, tear and flex resistant
Grade - 30, 50 and 60

Class 3B - Tear and flex resistant
Grade - 30, 50, 60, 70 and 80

3 SALIENT CHARACTERISTICS

3.1 Dimensional and physical requirements. Dimensional and physical requirements shall conform to Figure 1. Dimensional tolerances shall conform to the applicable commercial tolerances specified in ZZ-R-765.

3.2 Material. Material shall be silicone rubber formulated and processed to meet the physical and mechanical properties specified in Table I of ZZ-R-765, when tested in accordance with the ASTM test method specified in Table IX of ZZ-R-765.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to:
U.S. Army Research Laboratory Materials Directorate,
ATTN: AMSRL-MA-S, Watertown, MA 02172-0001.

AMSC - N/A FSC - 9320

Distribution Statement A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3 2 Material. Material shall be silicone rubber formulated and processed to meet the physical and mechanical properties specified in Table I of ZZ-R-765, when tested in accordance with the ASTM test method specified in Table IX of ZZ-R-765

3 3 Color. Unless otherwise specified, the color of the silicone rubber shall be the natural color of the compound furnished

3 4 Workmanship The end product shall be clean, smooth finished, and free from dirt, flash or rough edges

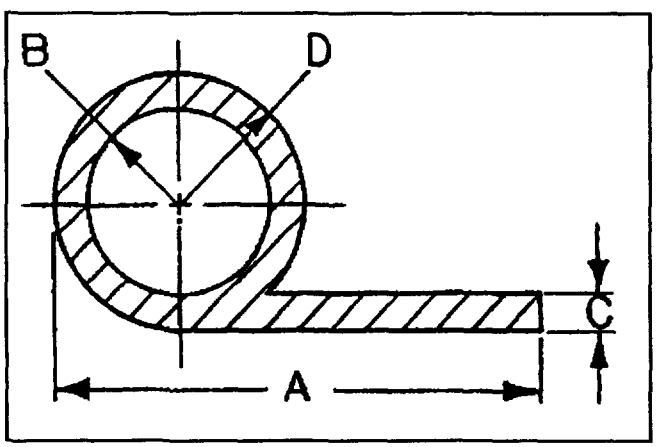


Figure 1 Dimensional and Physical Requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

Figure 1 continued

PART NO. AAXXX19-	A	B	C	D	LENGTH	NHR MIN. MAX.	MIN. TENSILE STRENGTH P.S.I.	COLOR	TEMP. RATING oF	SPECIAL FEATURES
001A4	0 620	0 060	0 060	0 120	A/A	35 0 to 45 0	700	NATURAL	-100 to 425	NONE
002B4	0 625	0 062	0.063	0 125	91 25	35 0 to 45 0	700	NATURAL	-100 to 425	NONE
003C5	0 640	0 039	0.062	0 101	A/A	45 0 to 55 0	700	NATURAL	-80 to 425	NONE
004C5	0 688	0 093	0 063	0 125	A/A	45 0 to 55 0	700	NATURAL	-80 to 525	0 010 in first fillet radius
005B6	0 870	0 154	0 031	0 185	55 0	55 0 to 65 0	650	NATURAL	-100 to 425	NONE
006B6	0 870	0.154	0.031	0 185	144 0	55 0 to 65 0	650	WHITE	-100 to 425	NONE
007C5	0 875	0 078	0.046	0.125	72 0	45 0 to 55 0	700	OLIVE GREEN	-80 to 425	NONE
008C5	0.875	0.125	0.062	0 187	A/A	45 0 to 55 0	700	NATURAL	-80 to 425	NONE
009B5	0 940	0 125	0 064	0 188	A/A	45 0 to 55 0	700	NATURAL	-100 to 425	0 015 in first fillet radius
010B5	1 000	0 135	0.050	0 175	42 0	45 0 to 55 0	700	NATURAL	-80 to 425	0 060 in first fillet radius
011F6	1 000	0 135	0.060	0.185	120 0	55 0 to 65 0	1200	NATURAL	-94 to 400	NONE
012C5	1 000	0.140	0 050	0 190	26 0	45 0 to 55 0	700	NATURAL	-800 to 425	NONE
013C6	1 000	0 187	0 062	0 250	A/A	55 0 to 65 0	700	NATURAL	-80 to 425	NONE
014E5	1 000	0 187	0.063	0 250	A/A	45 0 to 55 0	1200	NATURAL	-130 to 400	NONE
015A6	1 000	0 190	0.130	0 320	A/A	55 0 to 65 0	650	NATURAL	-100 to 425	NONE
016E5	1 030	0 148	0 040	0 188	A/A	45 0 to 55 0	650	NATURAL	-130 to 400	0 060in first fillet radius
017E5	1 040	0.115	0 060	0 175	A/A	45 0 to 55 0	1200	WHITE	-130 to 400	NONE
018F5	1 060	0 087	0.062	0 250	A/A	45 0 to 55 0	1200	NATURAL	-80 to 425	NONE
019C5	1 060	0 220	0.080	0 280	192 0	45 0 to 55 0	700	NATURAL	-80 to 425	NONE
020F5	1 090	0 188	0 062	0 250	A/A	45 0 to 55 0	1200	NATURAL	-94 to 400	NONE
021C5	1 125	0 188	0.125	0 250	96 to 120	45 0 to 55 0	700	WHITE	-80 to 425	NONE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

Figure 1 continued

PART NO. AAXXX19-	A	B	C	D	LENGTH	NHR MIN. MAX.	MIN TENSILE STRENGTH P.S.I.	COLOR	TEMP. RATING OF	SPECIAL FEATURES
022F5	0 140	0 140	0 050	0 190	66 0	45 0 to 55 0	1200	NATURAL	-94 to 400	0 030 in first fillet radius
023C5	1 180	0 186	0 064	0 250	A/A	45 0 to 55 0	700	NATURAL	-80 to 425	NONE
024E3	1 200	0 060	0 063	0 125	120 0	20 0 to 35 0	850	NATURAL	-130 to 400	0 062 in first fillet radius
025F5	1 495	0 325	0 045	0 375	96 0	45 0 to 55 0	1200	NATURAL	-94 to 400	0 060 in first fillet radius
026F5	1 500	0 145	0 100	0 185	A/A	45 0 to 55 0	1200	GRAY	-94 to 400	0 060 in first fillet radius
027D6	5 406	0 094	0.062	0 156	A/A	55 0 to 65 0	650	NATURAL	-80 to 425	NONE

NOTES
1. Dimensions are in inches.
2. A: Width
3. B: Inside radius.
4. C: Flange thickness.
5. D: Outside radius.
6. A/A: Any acceptable.
7. NHR, Nonmetallic hardness rating, Shore Durometer A
8. Minimum tensile strength in psi

4 REGULATORY REQUIREMENTS

4 1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR)

4 2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the, product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

5 QUALITY ASSURANCE PROVISIONS

5 1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract

5.2 Market acceptability The item offered must have been sold to the Government or commercial market and reflect demonstrated reliability and serviceability

6. PRESERVATION, PACKAGING, PACKING AND MARKING. Preservation, packaging, packing and marking for shipment shall be in accordance with American Society for Testing and Materials (ASTM) D 3951 or as specified in the contract or order.

7 NOTES

7.1 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows·

AAXXXXX - XXX - X - X

- Grade: 2 = 25, 3 = 30, 4 = 40, 5 = 50, 6 = 60, 7 = 70, 8 = 80
- Class: A = 1A, B = 1B, C = 2A, D = 2B, E = 3A, F = 3B, N = NA
- Individual number for each part number may range from 001 to 300
- Commercial Item Description Number
- Prefix

7.2 Addresses for obtaining reference documents.

SAE

SAE
400 Commonwealth Drive
Warrendale PA 15096-0001

ASTM

American Society for Testing and Materials
1916 Race Street
Philadelphia PA 19103

7.3 Ordering data.

a) Title, number, and date of this description.
b) Class and grade required.
c) Length.
d) Color required if other than natural color of compound furnished
e) Specify any special packaging requirements
f) Specify any additional quality assurance provisions, deemed necessary, covered by ZZ-R-765.
g) Contracting officer may request proof of certification of commercial item prior to first contract delivery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

7 4 Utilization caution Use of this material in items that may come in contact with human skin, food, or potable water is not recommended without prior approval of the appropriate medical service

MILITARY INTEREST:

CUSTODIANS:
Army - MR
Navy - AS
Air Force - 11

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY

DLA - GS

(Project No.: 9320-1126)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.