A-A-56036
December 1,1989

COMMERCIAL ITEM DESCRIPTION

TOTE TRAY, ELECTROSTATIC DISCHARGE PROTECTIVE

The General Services Administration has authorized the use of this Commercial Item Description.

This description covers tote trays that are conductive, dissipative, or insulative for the transport of static-sensitive printed circuit boards or devices.

Classification. The tote tray material shall be one of the following:

Type 1. Conductive. Material having a surface resistivity of less than 10^5 ohms per square.

Type 2. Dissipative. Material having a surface resistivity equal to or greater than 10^5 ohms per square but less than 10^{12} ohms per square.

Type 3. Insulative. Material having a surface resistivity equal to or greater than 10^{12} ohms per square.

ASTM D 257, Materials, Insulating, D-C Resistance or Conductance, shall be referenced to determine compliance for resistivity of subject tote tray material.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Director, AMC Packaging, Storage and Containerization Center, ATTN: SDSTO-TE-S, Tobyhanna, PA 18466-9057.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 8145

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

Salient characteristics. The tote tray shall be a rigid, molded container with uniform wall thickness capable of safely transporting sensitive, printed circuit boards or devices. Each container shall have adjustable dividers and inserts if required. The adjustable dividers shall be used to allow customizing of the tote tray. All containers shall be clearly identifiable as being either conductive, dissipative or insulative. The tote tray shall have a cover if required and shall also be stackable (see figure 1).

Workmanship. The finished tote tray shall be free from tears, holes, cuts, weak spots, or other defects that might affect appearance or serviceability.

Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.


Metric Products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

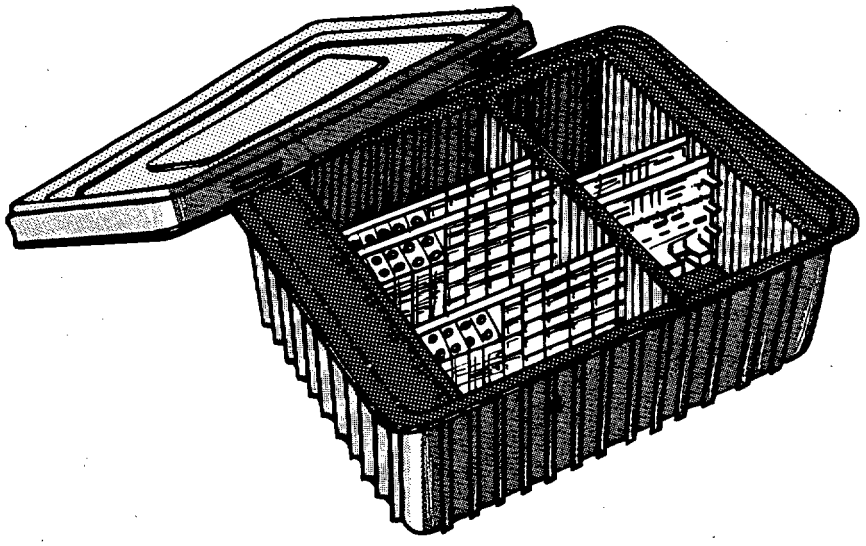

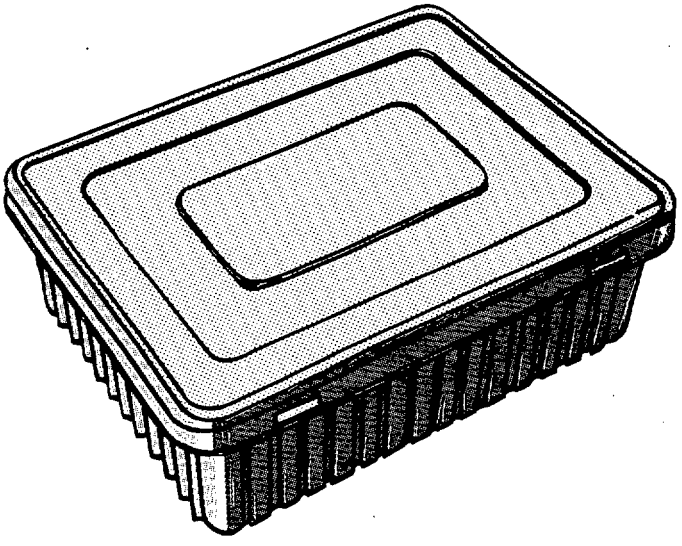


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.

Preservation, packing, and marking. Unless otherwise specified, preservation, packing, and marking shall be in accordance with ASTM D 3951, Standard Practice For Commercial Packaging.

Notes. Purchaser should specify type and size of tote trays and if covers and inserts are required.

Referenced ASTM documents are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

FED-STD-376, Preferred Metric Units For General Use By The Federal Government, is available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.

MILITARY INTERESTS:

Custodians:
Army - SM
Air Force - 69
DLA - ES

PREPARING ACTIVITY:
Army-SM

CIVIL AGENCY COORDINATING ACTIVITY
GSA-FSS

Review Activities:
Army - AM, AT, CR, MI, GL
Air Force - 15, 18, 84, 99

Project 8145-0040

FSC 8145

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:58Z
Check the source to verify that this is the current version before use.