

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-36

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

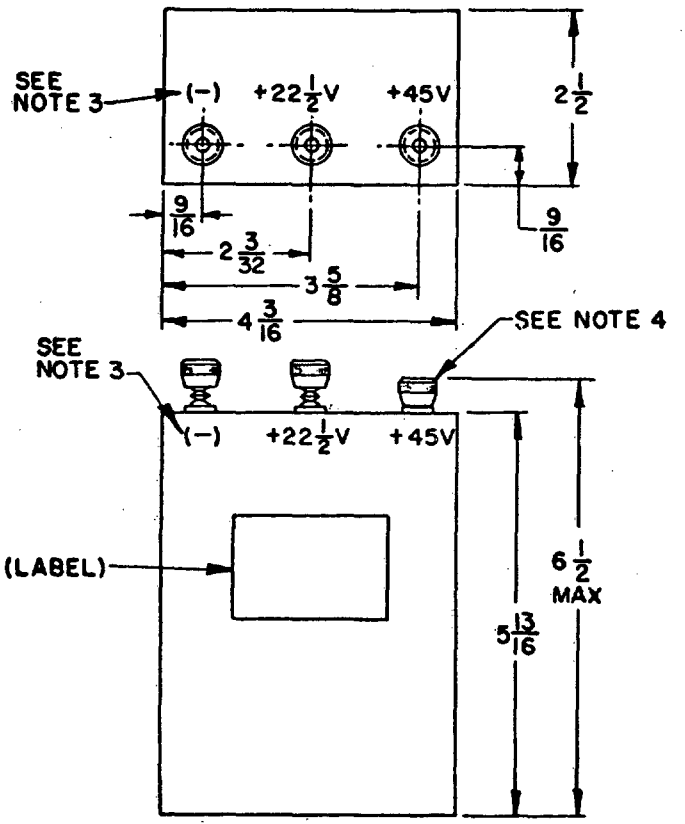



Typical Schematic

INCHES	MM
1/16	1.59
9/16	14.29
2 3/32	53.18
2 1/2	63.50
3 5/8	92.08
4 3/16	106.36
5 13/16	147.64
6 1/2	165.10

Ⓓ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ±1/16.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. Voltage and polarity markings may be placed either on the top or front face of the battery.
4. Provide insulated knurled nuts with brass, aluminum, or equivalent inserts.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 45 volts.
Tapped at: 22.5 volts.
Usual number and type of cells: 30 "B" cells.

Usual cell connection: Series.

Terminals: Stud and nut.

Weight (Maximum) 3 pounds, 6 ounces.

(D) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(D) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days

Discharge - The battery shall be discharged through 3,000 ohms continuously to a test-end voltage of 34.0 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 544.0 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
13	42.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian: (D)
Army - ER
Navy - SH
Air Force - 99

Preparing activity: (D)
Army - ER

Review activities:

Project Number: (6135-0155-11)

User activities:
Army - ME
Navy - YD, MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.

To detach this fo cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-B-18757C BATTERY, DRY, BA-231/U

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.