
MIL-B-18/17D
21 May 1985
SUPERSEDING
MIL-B-18/17C
21 August 1976

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA- 39

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

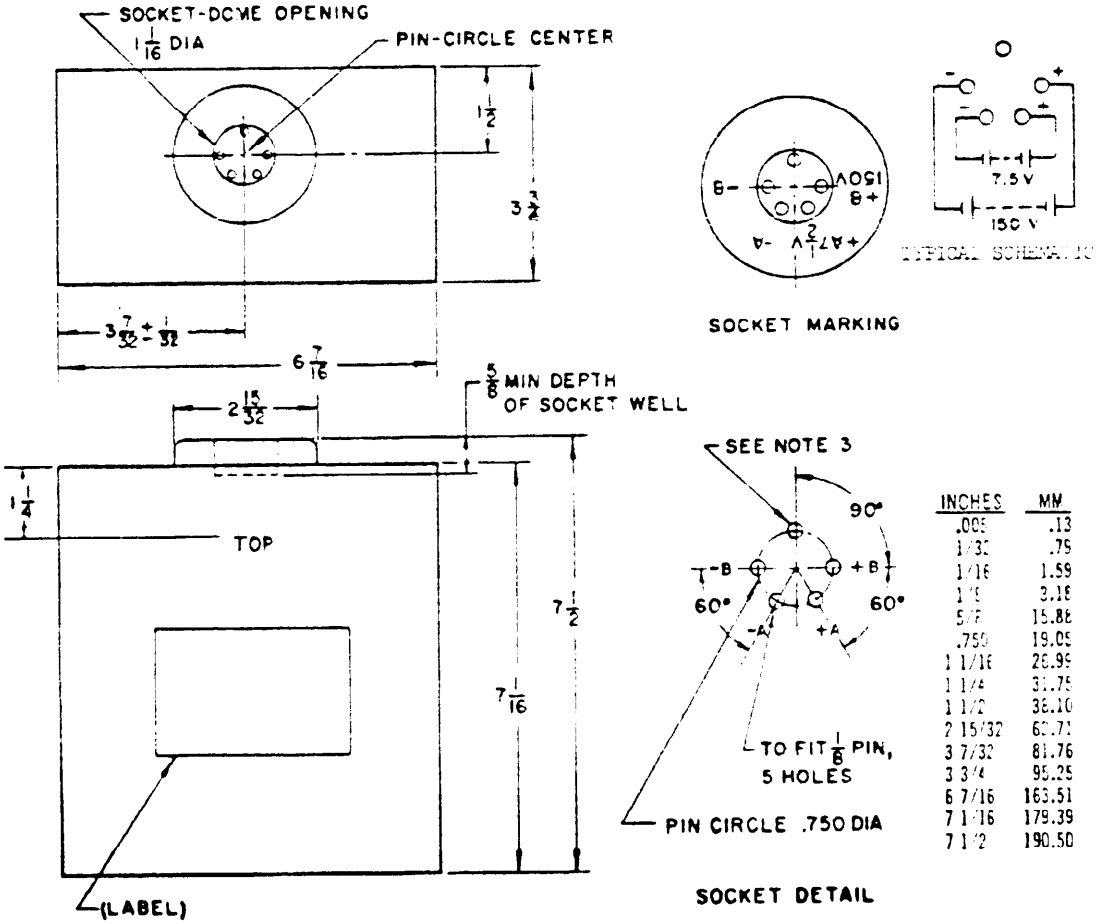

INCHES	MM
.005	.13
1/32	.79
1/16	1.59
1/8	3.18
5/8	15.88
.750	19.05
1 1/16	26.99
1 1/4	31.75
1 1/2	38.10
2 15/32	62.71
3 7/32	81.76
3 3/4	95.25
6 7/16	163.51
7 1/16	179.39
7 1/2	190.50

(D) denotes changes

Source: https://assist.dla.mil -- Downloaded: 20260-15T16:42Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are ± 1/16 on fractions, ±0.005 on decimals, and ± 1/2° on angles.

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

3. Socket insert contact is not required for unused hole.

REQUIREMENTS:

Dimensions and configuration: See figure.

	A unit:	B unit:
Nominal voltage:	7.5 volts	150 volts
Usual number and type of cells:	5 "F"	100 "A"
Usual cell connection:	Series	Series

Terminals: 5 - hole socket.

Weight (Maximum): 8 pounds, 12 ounces.

(I) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(D) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(I) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:42Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - The A unit shall be discharged through 37.5 ohms and the B unit through 3,600 ohms for 2 minutes each. Then both units shall stand on open circuit for 4 minutes. This cycle shall be repeated continuously to a test-end voltage of 5.5 volts for the A unit and 110.0 volts for the B unit.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use load resistance values as shown below:

A section	34,88 ohms
B section	7,230 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
Unit A - 8	7.0
Unit B - 28	140.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:
Army - MI

Project Number: (6135-0155-13)

User activities:
Army - ME
Navy - YD, MC
DLA - ES

Source: https://aeslist.dla.mil -- Downloaded: 2026-10-15T16:42Z
Check the source to verify that this is the current version before use.