
MIL-B-18/18D
21 May 1985
SUPERSEDING
MIL-B-18/18C
21 August 1976

MILITARY SPECIFICATION SHEET


BATTERY, DRY, BA-40

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

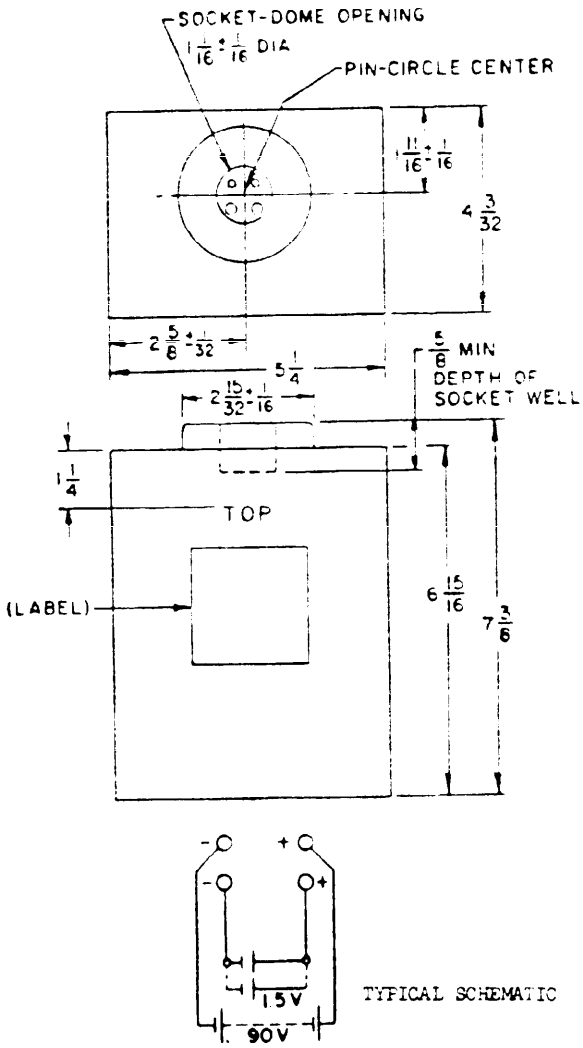

TYPICAL SCHEMATIC



SOCKET MARKING



SOCKET DETAIL

INCHES	MM
.005	.13
1/32	.79
1/16	1.59
1/8	3.18
5/32	3.97
3/16	4.76
5/8	15.88
.640	16.26
1 1/16	26.99
1 1/4	31.75
1 11/16	42.86
2 15/32	62.71
2 5/8	66.68
4 3/32	103.98
5 1/4	133.35
6 15/16	176.21
7 3/8	187.33

(D) denotes changes

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:42Z
Check the source to verify that this is the current version before use.

FSC-6135

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are $\pm$ 3/16 on fractions, $\pm$0.005 on decimals, $-$ 1/16 and $\pm$ 1/2° on angles.

2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

REQUIREMENTS:

Dimensions and configuration: See figure.

	A unit:	B unit:
Nominal voltage:	1.5 volts	90 volts
Usual number and type of cells:	4 "G" cells	60 "B" cells
Usual cell connection:	Parallel	Series

Terminals: 4-hole socket.

Weight (Maximum): 7 pounds, 12 ounces.

(I) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(I) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance $\pm$20 volts.
Capacity, D (without storage).
Jacket integrity test.

(P) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance $\pm$20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:42Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days

Discharge - The A unit shall be discharged through 1.4 ohms continuously to a test-end voltage of 1.1 volts. The B unit shall be discharged through 1,560 ohms for 2 minutes, then through 2,600 ohms for 4 minutes. This cycle shall be repeated continuously to a test-end voltage of 65.0 volts.

Closed circuit voltage - Use TS-183( )/U test per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use load resistance values as shown below:

A section	1,998 ohms
B section	1,292 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
A - 1 B - 23	1.40 84.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:
Army - MI
Navy - YD

Project Number: (6135-0155-14)

User activities:
Army - ME
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:42Z
Check the source to verify that this is the current version before use.