
MIL-B-18/9C
21 August 1976
SUPERSEDING
MIL-B-18/9B
6 May 1965

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-30

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18. ©

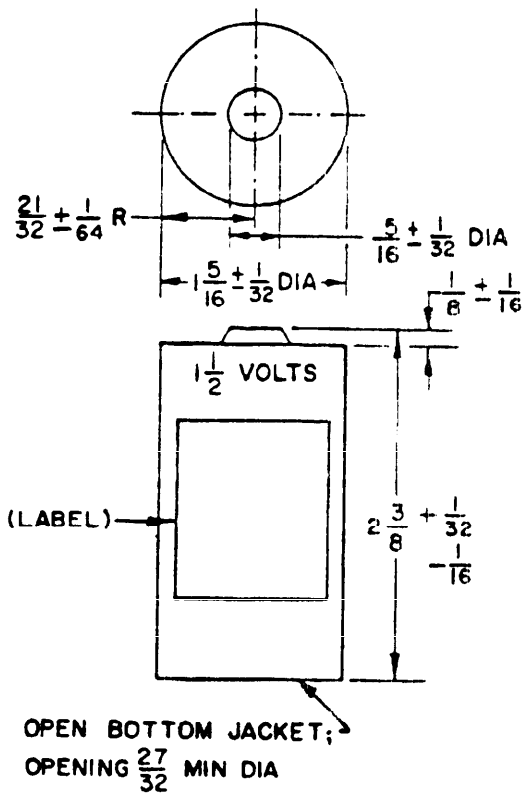

INCHES	MM
1/64	.40
1/32	.79
1/16	1.59
1/8	3.18
5/16	7.94
21/32	16.67
27/32	21.43
1 5/16	33.34
2 3/8	60.33

NOTES:

1. All dimensions shown on figure are in inches.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

© denotes changes

FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 1.5 volts.

Number and type of cell: 1 "D" cell.

Terminals: Flat surface.

Weight (maximum): 4 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be as specified in Supplement 1.

First Article inspection: ©

Visual and mechanical (external and internal).
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Capacity, D (without storage)

©

Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Waterproofing-of-jacket test (when applicable).
Electrolyte leakage.
Capacity, D&T ©

Methods of examination and tests:

Capacity tests: See requirements for capacity specified herein.

Storage -

TEST	PERIOD
D	12 months
T	90 days

©

Discharge - The battery shall be discharged through 6.67 ohms for 4 minutes per 1/2 hour, 10 hours per day, 5 days per week. This cycle shall be repeated continuously to a test-end voltage of 0.93 volts.

Closed circuit voltage: Use TS-183( )/U test per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 5.983 ohms. ©

Electrolyte leakage - The battery shall be discharged through 5 ohms for 24 hours.

©

Source: https://assist.dla.mil -- Downloaded: 202640-15T16:40Z
Check the source to verify that this is the currentversion before use.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
3	1.35

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodians:
Army - EL
Navy - SH
Air Force - 99

Review activities:
Army - MI, PA, EA

User activities:
Army - ME, AV
Navy - YD, MC

Preparing activity:
Army - EL

(Project 6135-0410)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:40Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:40Z
Check the source to verify that this is the current version before use.