INCH-POUND
MIL-DTL-18/12F
18 September 2023
SUPERSEDING
MIL-B-18/12E
W/AMENDMENT 1
25 June 2021

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-34

INACTIVE FOR NEW DESIGN AFTER
10 AUGUST 1998 AND IS NO LONGER USED,
EXCEPT FOR REPLACEMENT PURPOSES.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18.

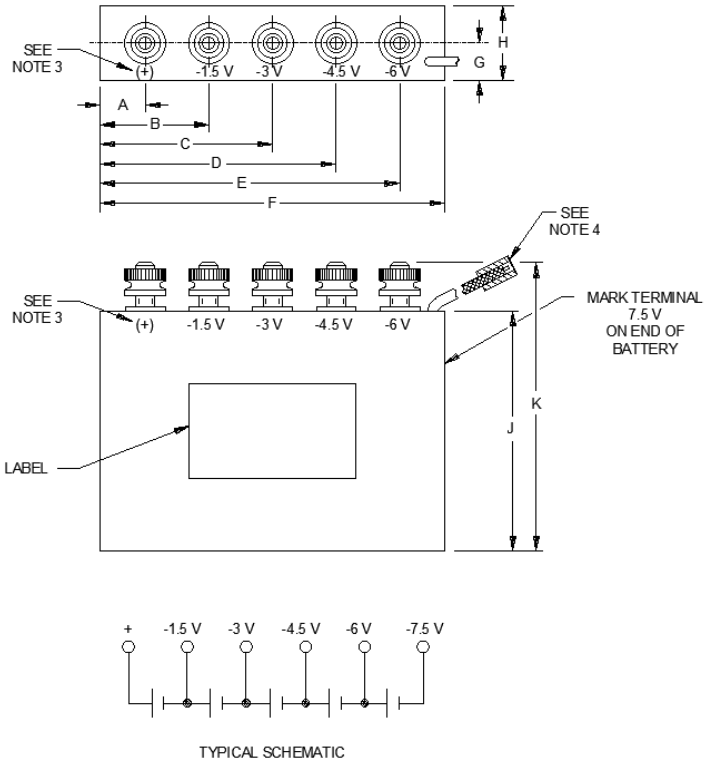


FIGURE 1. Battery dimensions

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.

Ltr	Inches	Inches	mm	mm
	Min	Max	Min	Max
A	.469	.594	25.87	25.99
B	1.219	1.344	26.62	26.74
C	1.969	2.094	27.40	27.49
D	2.719	2.844	28.12	28.24
E	3.469	3.595	28.87	29.00
F	4.000	4.125	29.40	29.53
G	.375	.500	25.78	25.90
H	.8125	.938	26.21	26.34
J	2.750	2.875	28.15	28.28
K	---	3.313	---	28.71

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Voltage and polarity markings may be placed either on the top or front face of the battery.
4. Provide protective covering to prevent short circuit.
5. Marking to be in accordance with MIL-DTL-18.

FIGURE 1. Battery dimensions - continued.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Nominal voltage: -7.5 volts.
Tapped at: -1.5 volts.
Tapped at: -3 volts.
Tapped at: -4.5 volts.
Tapped at: -6 volts.

Usual number and type of cells: 5 “B” cells.

Usual cell connection: Series.

Terminals: Stud and nut and one wire lead.

Weight (maximum): 10 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

First article inspection in accordance with MIL-DTL-18:

Visual and mechanical (external).
Battery voltage.
Vibration test.
Mechanical-shock test in accordance with MIL-STD-202-213, test condition I.
Insulation resistance test in accordance with MIL-STD-202-302, test condition B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.

Conformance inspection in accordance with MIL-DTL-18:

Visual and mechanical (external).
Battery voltage.
Insulation-resistance test in accordance with MIL-STD-202-302, test condition B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test in accordance with MIL-STD-202-213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D and T.

Method of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage:

Test	Period
D	12 months
T	90 days

Open-circuit voltage: After completion of storage for D test specified, the open-circuit voltage shall be not less than 7.25 volts when measured at ambient storage conditions.

Discharge: The battery shall be discharged through 35 ohms for 4 minutes per hour, 10 hours per day, 5 days per week. This cycle shall be repeated to a test-end voltage of 4.5 volts.

Closed circuit voltage: Use TS-183 ( )/U test per special marking or, with minimum permissible voltage as specified for TS-183 ( )/U, use a load resistance value of 34.88 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
8	6.40

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Part or Identifying Number (PIN): BA-34, see 1.2 of MIL-DTL-18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.

Change notations. The margins of this standard are marked with vertical lines to indicate modifications generated by this change. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-18, this document references the following:

MIL-STD-202-213 MIL-STD-202-302

Custodians:
Army - AR
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 6135-2023-001)

Review activities:
Navy - MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:41Z
Check the source to verify that this is the current version before use.