
MIL-B-3628 / 64A
10 February 1988
SUPERSEDING
MIL-B-3628 / 64
1 March 1983


MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, SPACE OPERATIONS, AIR FORCE


This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

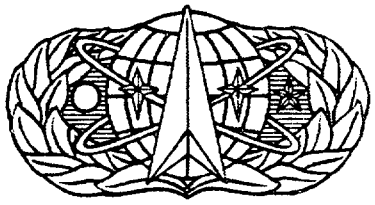

-1,-4

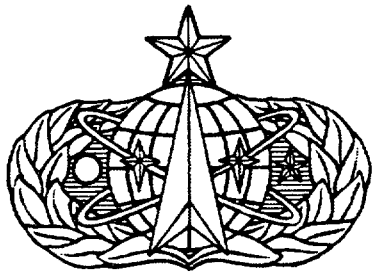

-2,-5

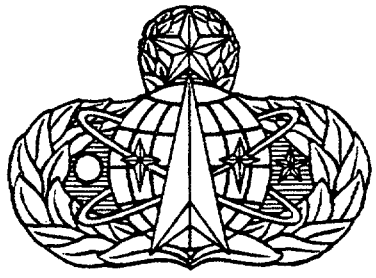

-3,-6

DASH NOS.
- -1: BASIC, REGULAR SIZE
- -2: SENIOR, REGULAR SIZE
- -3: MASTER, REGULAR SIZE
- -4: BASIC, MINIATURE SIZE
- -5: SENIOR, MINIATURE SIZE
- -6: MASTER, MINIATURE SIZE

MATERIAL: RED BRASS OR NICKEL SILVER

DIMENSIONS (INCHES):

HEIGHT (OVERALL):

-1:	7/8 (REF)	-4:	7/16 (REF)
-2:	1-1/8 (REF)	-5:	19/32 (REF)
-3:	1-3/16 (REF)	-6:	5/8 (REF)

WIDTH (OVERALL):

-1,-2,-3:	1-5/8 (REF)
-4,-5,-6:	13/16 (REF)

THICKNESS (THICKEST POINT):
- -1,-2,-3: .135 ± .010
- -4,-5,-6: .095 ± .010

FINISH: NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, OXIDIZED, RELIEVED, SATIN FINISH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. ONE PRONG SHALL BE SOLDERED OR FUSED TO THE BACK OF THE BADGE AT EACH INTERSECTION OF THE HORIZONTAL CENTERLINE OF THE BADGE AND THE CENTER OF THE WREATH.
2. THE AREA BETWEEN THE WREATH AND STAR ON THE DASH NO. 3 SHALL BE PIERCED.
3. THE BADGES MAY BE RHODIUM PLATED FOR COMMERCIAL SALE FOR AIR FORCE SALE.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82,99
DLA - CT

User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:15Z
Check the source to verify that this is the current version before use.