

MIL-B-3628 / 65A
10 February 1988
SUPERSEDING
MIL-B-3628 / 65
12 March 1984

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT PARACHUTIST, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

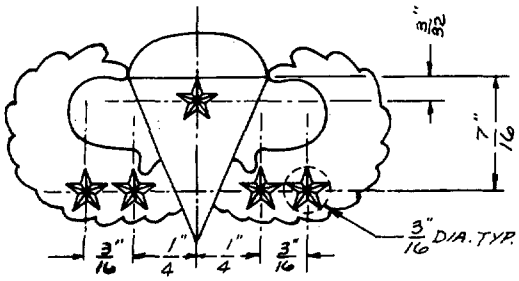

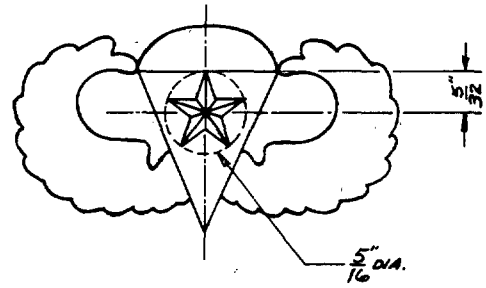

FIFTH AWARD

(a) - 1ST AWARD
(b) - 2ND AWARD
(c) - 3RD AWARD
(d) - 4TH AWARD
(e) - 5TH AWARD

DASH NOS.	ITEM
-1:	COMBAT PARACHUTIST REGULAR SIZE
-2:	COMBAT PARACHUTIST SUBDUED
-3:	COMBAT PARACHUTIST DRESS MINIATURE
-4:	SENIOR COMBAT PARACHUTIST REGULAR SIZE
-5:	SENIOR COMBAT PARACHUTIST SUBDUED
-6:	SENIOR COMBAT PARACHUTIST DRESS MINIATURE
-7:	MASTER COMBAT PARACHUTIST REGULAR SIZE
-8:	MASTER COMBAT PARACHUTIST SUBDUED
-9:	MASTER COMBAT PARACHUTIST DRESS MINIATURE

BADGE - THE BADGES SHALL CONFORM TO MIL-B-3628/30 EXCEPT THE STAR SHALL BE MOUNTED IN THE LOCATION SHOWN IN THE ILLUSTRATIONS ABOVE.

STAR - THE STARS, EXCEPT FOR THE PRONGS, SHALL CONFORM TO MIL-R-41819/7. THE SINGLE OR COMBINATION OF SINGLE 3/16 INCH BRONZE STARS SHALL BE USED FOR AWARDS (a) (b) (c) AND (d) AND THE SINGLE 5/16 INCH GOLD STAR SHALL BE USED FOR AWARD (e). THE ATTACHING DEVICES USED FOR THE STARS SHALL BE A STAPLE TYPE PRONG. THE PRONG SHALL BE 1/8, +1/16, -0 INCH LONG AND SHALL BE FORMED FROM .010 ± .002 INCH THICK FLAT BRASS WIRE .040 ± .002 INCH WIDE. THE PRONG SHALL BE CENTERED ON THE BACK OF THE STAR.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE STAR(S) SHALL BE MOUNTED ON THE BADGE BY DRILLING AS MANY .050 ± .050 INCH DIAMETER HOLES AS STARS TO BE MOUNTED IN THE LOCATIONS SHOWN. THE PRONGS SHALL BE PUSHED THROUGH THE HOLE(S) SO THAT THE STAR IS LOCATED IN THE CORRECT POSITION AND THE LEGS OF THE PRONG BENT OVER TO INSURE A TIGHT SNUG FIT.

2. THE FIRST AWARD SHALL CONSIST OF A SINGLE 3/16 INCH BRONZE STAR LOCATED ON THE VERTICAL CENTER LINE OF THE BADGE 3/32 INCH BELOW THE CANOPY LINE.

3. THE SECOND AWARD SHALL CONSIST OF TWO SINGLE BRONZE 3/16 STARS LOCATED ON A HORIZONTAL LINE 7/16 INCH BELOW THE CANOPY LINE AND ONE STAR 1/4 INCH ON EITHER SIDE OF THE VERTICAL CENTER LINE OF THE BADGE.

4. THE THIRD AWARD SHALL CONSIST OF 3 SINGLE 3/16 INCH BRONZE STARS. THE STARS SHALL BE LOCATED AS SPECIFIED FOR THE FIRST AND SECOND AWARDS.

5. THE FOURTH AWARD SHALL CONSIST OF 4 SINGLE 3/16 INCH BRONZE STARS LOCATED ON A HORIZONTAL LINE 7/16 INCH BELOW THE CANOPY LINE. A STAR WILL BE LOCATED 1/4 INCH AND 7/16 INCH ON EITHER SIDE OF THE VERTICAL CENTER LINE.

6. THE FIFTH AWARD SHALL CONSIST OF A SINGLE 5/16 INCH GOLD STAR LOCATED ON THE VERTICAL CENTER LINE OF THE BADGE AND CENTERED 5/32 INCH BELOW THE CANOPY LINE.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

★ U.S. GOVERNMENT PRINTING OFFICE: 1988 505-033-90878

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.