NOT MEASUREMENT SENSITIVE


MIL-B-3628/65D
30 July 1993
SUPERSEDING
MIL-B-3628/65C
2 June 1992

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT PARACHUTIST, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

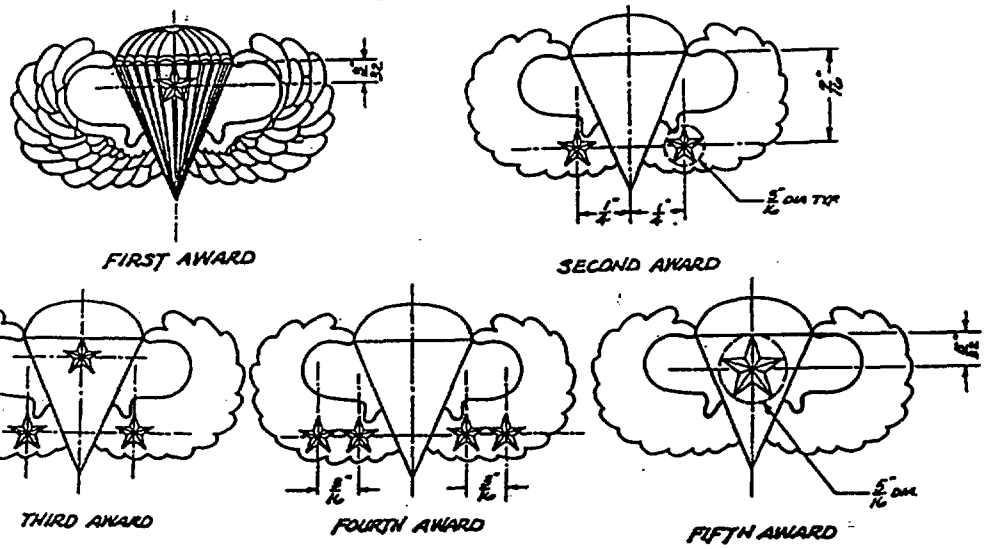

DASH NO:

-1: Combat Parachutist, Regular Size (A, AF)
-2: Combat Parachutist, Regular Size, Subdued (A)
-3: Combat Parachutist, Dress Miniature Size (A)
-4: Senior Combat Parachutist, Regular Size (A, AF)
-5: Senior Combat Parachutist, Regular Size, Subdued (A)
-6: Senior Combat Parachutist, Dress Miniature Size (A)
-7: Master Combat Parachutist, Regular Size (A, AF)
-8: Master Combat Parachutist, Regular Size, Subdued (A)
-9: Master Combat Parachutist, Dress Miniature Size (A)

NOTES:

1. The badges shall be manufactured in accordance with the latest revision to MIL-B-3628/30 except the stars shall be mounted as shown. The basic badge is

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.

shown for illustration purposes. Stars shall be located in the same locations for the senior and master badges.

2. For the first, second, third and fourth award for Dash No. 1, 2, 4, 5, 7, and 8, the star shall be 3/16 inch (0.48 cm) (REF) in diameter, 1/16 inch + 1/64 inch - 0 inch (0.16 cm + 0.04 cm - 0 cm) in thickness and be made from red brass or gilding metal. The finish for Dash No. 1, 4, and 7 shall be copper flash (red brass only), oxidized and relieved. The finish for Dash No. 2, 5, and 8 shall be dull flat black enamel.

3. For the fifth award for Dash No. 1, 2, 4, 5, 7, and 8, the star shall be 5/16 inch (0.79 cm) (REF) in diameter, 5/64 inch + 1/64 inch - 0 inch (0.20 cm + 0.04 cm - 0 cm) in thickness and be made from red brass or gilding metal. The finish for Dash No. 1, 4, and 7 shall be gold plated, highly polished. The finish for Dash No. 2, 5, and 8 shall be dull flat black enamel.

4. For the first, second, third and fourth award for Dash No. 3, 6, and 9, the star shall be 3/32 inch (0.24 cm) (REF) in diameter, 3/64 inch + 1/64 inch - 0 inch (0.12 cm + 0.04 cm - 0 cm) in thickness and be made from red brass or gilding metal. The finish shall be copper flash (red brass only), oxidized and relieved.

5. For the fifth award for Dash No. 3, 6, and 9, the star shall be 3/16 inch (0.48 cm) (REF) in diameter, 1/16 inch + 1/64 inch - 0 inch (0.16 cm + 0.04 cm - 0 cm) in thickness and be made from red brass or gilding metal. The finish shall be gold plated, highly polished.

6. The attaching devise for all star sizes shall be a staple type prong. The prong shall be 1/8 inch + 1/16 inch - 0 inch (0.32 cm + 0.16 cm - 0 cm) long and shall be formed from 0.010 inch $\pm$ 0.002 inch (0.025 cm $\pm$ 0.005 cm) thick flat brass wire 0.040 inch $\pm$ 0.002 inch (0.101 cm $\pm$ 0.005 cm) wide. The prong shall be centered on the back of the star. The star shall be mounted on the badge by drilling as many 0.050 inch $\pm$ 0.005 inch (0.127 cm $\pm$ 0.012 cm) diameter holes as stars to be mounted in the locations shown. The prongs shall be pushed through the hole(s) so the star is located in the correct position and the legs of the prong bent over to insure a tight snug fit.

7. The dull, flat, black enamel for Dash No. -2, -5, and -8 shall match FED-STD-595, Chip No. 37038.

8. The term (REF) refers to measurements taken from the Government furnished hub or die.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82, 99
DLA - CT

User activities:
Air Force - 45

Preparing activities:
Army - IH

(Project No. 8455-0693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.