INCH-POUND

MIL-DTL-3628/65F
30 November 2004
SUPERSEDING
MIL-DTL-3628/65E
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT PARACHUTIST, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest revision of MIL-DTL-3628.

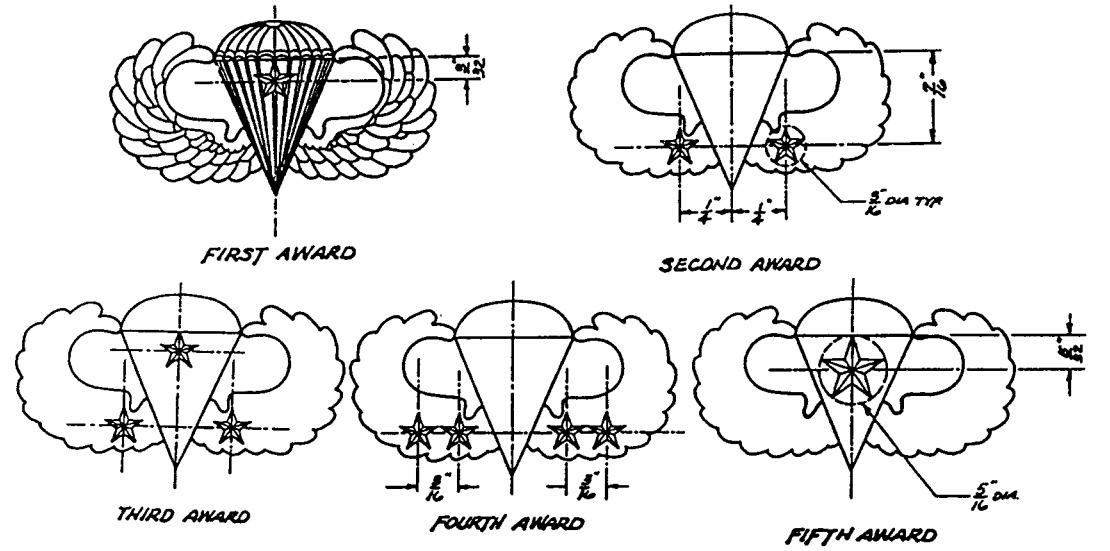

DASH NO.

-1: Combat Parachutist, Regular Size (A, AF)
-2: Combat Parachutist, Regular Size, Subdued (A)
-3: Combat Parachutist, Dress Miniature Size (A)
-4: Senior Combat Parachutist, Regular Size (A, AF)
-5: Senior Combat Parachutist, Regular Size, Subdued (A)
-6: Senior Combat Parachutist, Dress Miniature Size (A)
-7: Master Combat Parachutist, Regular Size (A, AF)
-8: Master Combat Parachutist, Regular Size, Subdued (A)
-9: Master Combat Parachutist, Dress Miniature Size (A)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.

2. The badges shall be manufactured in accordance with the latest revision of MIL-DTL-3628/30, except that the star shall be mounted as shown. The basic badge is shown for illustration purposes. Stars shall be located in the same locations for the senior and master badges.

3. For the first, second, third and fourth award for -1, -2, -4, -5, -7, and -8, the star shall be 3/16 inch (REF) in diameter, 1/16 inch + 1/64 inch - 0 inch in thickness, and be made from red brass or gilding metal. The finish for -1, -4, and -7 shall be copper flash (red brass only), oxidized and relieved. The finish for -2, -5, and -8 shall be dull flat black enamel.

4. For the fifth award for -1, -2, -4, -5, -7, and -8, the star shall be 5/16 inch (REF) in diameter, 5/64 inch + 1/64 inch - 0 inch in thickness, and be made from red brass or gilding metal. The finish for -1, -4, and -7 shall be gold plated, highly polished. The finish for -2, -5, and -8 shall be dull flat black enamel.

5. For the first, second, third and fourth award for -3, -6, and -9, the star shall be 3/32 inch (REF) in diameter, 3/64 inch + 1/64 inch 0 inch in thickness, and be made from red brass or gilding metal. The finish shall be copper flash (red brass only), oxidized and relieved.

6. For the fifth award for -3, -6, and -9, the star shall be 3/16 inch (REF) in diameter, 1/16 inch + 1/64 inch - 0 inch in thickness, and be made from red brass or gilding metal. The finish shall be gold plated, highly polished.

7. The stars, except for the prongs, shall conform to the latest revision of MIL-DTL-41819/7. The single or combination of single 3/16 inch bronze stars shall be for the first, second, third, and fourth awards. The single 5/16 inch gold-plated star shall be used for the fifth award.

8. The attaching device for all star sizes shall be a staple type prong. The prong shall be 1/8 inch + 1/16 inch - 0 inch long and shall be formed from 0.010 inch ± 0.002 inch thick flat brass wire 0.040 inch ± 0.002 inch wide. The prong shall be centered on the back of the star. The star shall be mounted on the badge by drilling as many 0.050 inch ± 0.005 inch diameter holes as stars to be mounted in the locations shown. The prongs shall be pushed through the hole(s) so the star is located in the correct position and the legs of the prong bent over to insure a tight, snug fit.

9. The dull, flat, black enamel for -2, -5, and -8 shall match FED-STD-595, Chip No. 37038.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH
(Project No. 8455-0163/001)

Review activities:
DLA-CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.