INCH-POUND

MIL-DTL-3628/65G
23 May 2005
SUPERSEDING
MIL-DTL-3628/65F
30 November 2004

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, COMBAT PARACHUTIST, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest revision of MIL-DTL-3628.

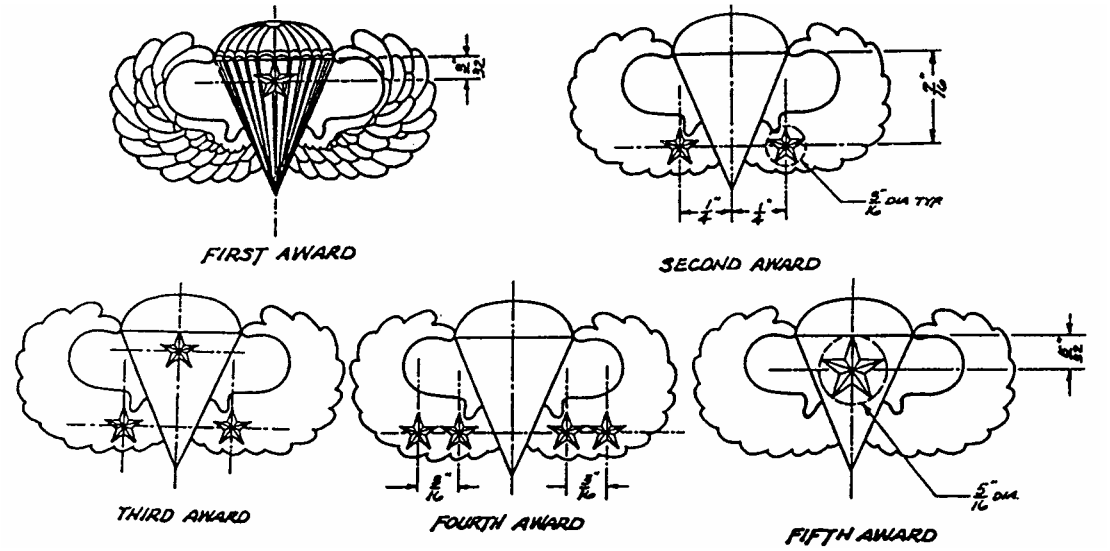

DASH NO.

-1 Master Combat Parachutist, Regular Size (A, AF)
-2: Senior Combat Parachutist, Regular Size (A, AF)
-3: Combat Parachutist, Regular Size (A, AF)
-4: Master Combat Parachutist, Dress Miniature Size (A)
-5: Senior Combat Parachutist, Dress Miniature Size (A)
-6: Combat Parachutist, Dress Miniature Size (A)
-7: Master Combat Parachutist, Regular Size, Subdued (A)
-8: Senior Combat Parachutist, Regular Size, Subdued (A)
-9: Combat Parachutist, Regular Size, Subdued (A)

NOTES:

1. The badges shall be manufactured in accordance with the latest revision of MIL-DTL-3628/30. -1 through -9 of the Combat Parachutist Badge correspond to -1 through -9 of MIL-DTL-3628/30, except that star(s) shall be mounted as shown. The basic badge is

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.

shown for illustration purposes; senior and master badges shall also have the stars mounted as illustrated.

2. The term (REF) refers to the measurements taken from the Government furnished hub or die.

3. Star placement and finish:

a. The star for the first, second, third and fourth award for -1, -2, -3, -7, -8, and -9 shall be 3/16 inch (REF) in diameter, 1/16 inch + 1/64 inch - 0 inch in thickness, and be made from not less than 85/15 rich-low brass. The finish for -1, -2, and -3 shall be copper flashed (unless 95/5 gilding metal is used), oxidized, and relieved. The finish for -7, -8, and -9 shall be dull flat black enamel.

b. The star for the fifth award for -1, -2, -3, -7, -8, and -9 shall be 5/16 inch (REF) in diameter, 5/64 inch + 1/64 inch - 0 inch in thickness, and be made from not less than 85/15 rich-low brass. The finish for -1, -2, and -3 shall be gold plated, highly polished. The finish for -7, -8, and -9 shall be dull flat black enamel.

c. The star for the first, second, third and fourth award for -4, -5, and -6 shall be 3/32 inch (REF) in diameter, 3/64 inch + 1/64 inch - 0 inch in thickness, and be made from not less than 85/15 rich-low brass. The finish shall be copper flashed (unless 95/5 gilding metal is used), oxidized, and relieved.

4. The star for the fifth award for -4, -5, and -6 shall be 3/16 inch (REF) in diameter, 1/16 inch + 1/64 inch - 0 inch in thickness, and be made from not less than 85/15 rich-low brass. The finish shall be gold plated, highly polished.

5. Except for the 3/32 inch star, hubs used to make single or double stars in accordance with MIL-DTL-41819/7 shall be used for the stars specified herein.

6. The attaching device for all star sizes shall be a staple type prong. The prong shall be 1/8 inch + 1/16 inch - 0 inch long and shall be formed from 0.010 inch ± 0.002 inch thick flat brass wire 0.040 inch ± 0.002 inch wide. The prong shall be centered on the back of the star. The star shall be mounted on the badge by drilling as many 0.050 inch ± 0.005 inch diameter holes as stars to be mounted in the locations shown. The prongs shall be pushed through the hole(s) so that the star is located in the correct position and the prongs bent over to insure a tight, snug fit.

7. As an alternate method of attachment for -7, -8, and -9, unfinished star(s) may be soldered to the unfinished insignia, and the entire piece finished in the required subdued finish.

8. The dull, flat, black enamel for -7, -8, and -9 shall match FED-STD-595, Chip No. 37038.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH
Air Force - 11

Preparing activity:
Army - IH
(Project No. 8455-2005/019)

Review activities:
DLA-CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:16Z
Check the source to verify that this is the current version before use.