NOT MEASUREMENT SENSITIVE


MIL-B-3628/68C
9 March 1990
SUPERSEDING
MIL-B-3628/68B
9 September 1987

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AIRCRAFT/MUNITIONS MAINTENANCE, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

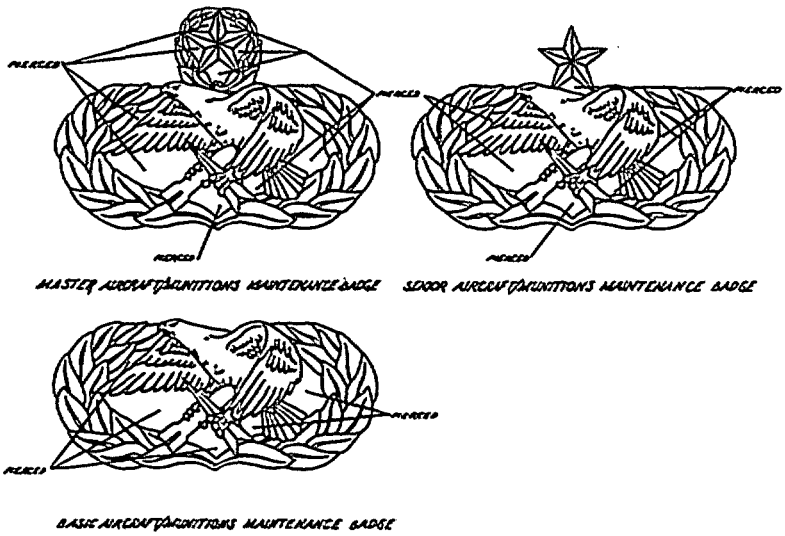

MASTER AIRCRAFT/MUNITIONS MAINTENANCE BADGE SENIOR AIRCRAFT/MUNITIONS MAINTENANCE BADGE

BASIC AIRCRAFT/MUNITIONS MAINTENANCE BADGE

Dash No:
-1: Basic (Regular size)
-2: Senior (Regular size)
-3: Master (Regular size)

Dash No:
-4: Basic (Miniature size)
-5: Senior (Miniature size)
-6: Master (Miniature size)

MATERIAL: Red brass or nickel silver

DIAMETER:
HEIGHT (Overall):
-1: 7/8 inch (2.22 cm) (REF)
-2: 1-1/8 inch (2.86 cm) (REF)
-3: 1-3/16 inch (3.02 cm) (REF)
-4: 7/16 inch (1.11 cm) (REF)
-5: 9/16 inch (1.43 cm)
-6: 19/32 inch (1.51 cm)

WIDTH (Overall):
-1,-2,-3: 1-5/8 inch (4.13 cm) (REF)
-4,-5,-6: 13/16 inch (2.06 cm) (REF)

THICKNESS (At thickest point):
-1,-2,-3: .120 inch ± .010 inch (0.304 cm) ± (0.025 cm)
-4,-5,-6: .090 inch ± .010 inch (0.228 cm) ± (0.025 cm)

FINISH: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish. Reverse and edges clean.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:18Z
Check the source to verify that this is the current version before use.

NOTES:

1. Piercing for regular sized badges shall be as shown. The miniature badges shall have two piercing, one below the right wing and one behind the left wing.

2. A mock forcer may be used to bring up the detail on the falcon.

3. The attaching device shall be prong and clutch type. One prong shall be located at each intersection of the horizontal and vertical centerline of the wreath. The prongs shall be hard soldered or fused to the reverse side of the badge.

4. The badge may have a brightly polished rhodium plated finish for commercial sale.

Custodians:
Army - IH
Air Force - 11

Review activities:
Air Force - 82, 99
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Army - IH

Project no. 8455-0461

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:18Z
Check the source to verify that this is the current version before use.