INCH-POUND


MIL-DTL-3628/72F
15 May 2008
SUPERSEDING
MIL-DTL-3628/72E
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, OCCUPATIONAL, MISSILE WITH OPERATIONS CREW DESIGNATOR, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

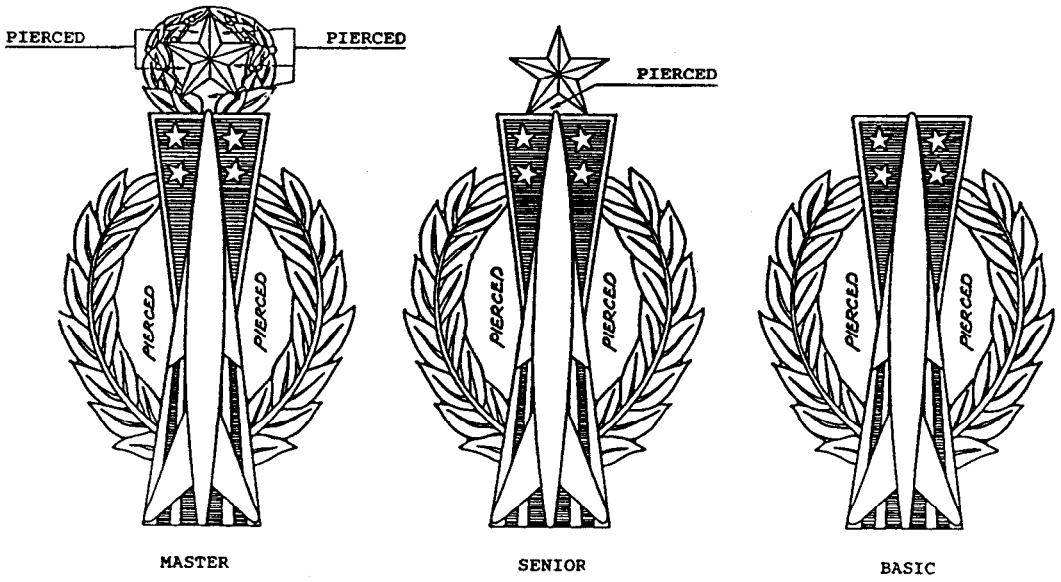

MASTER SENIOR BASIC

DASH NO.
-1: Basic, Regular Size
-2: Senior, Regular Size
-3: Master, Regular Size
-4: Basic, Miniature Size
-5: Senior, Miniature Size
-6: Master, Miniature Size

MATERIAL: Red Brass or Nickel Silver

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.

FINISH: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:

HEIGHT (Overall):
-1: 2-1/2 inches (6.35 cm) (REF)
-2: 3 inches (7.62 cm) (REF)
-3: 3-1/8 inches (7.94 cm) (REF)
-4: 1-25/32 inches (4.52 cm) (REF)
-5: 2-1/8 inches (5.40 cm) (REF)
-6: 2-1/4 inches (5.72 cm) (REF)

WIDTH (Overall):
-1, -2, -3: 1-3/4 inches (4.45 cm) (REF)
-4, -5, -6: 1-3/16 inches (3.02 cm) (REF)

THICKNESS (Assembled):
-1, -2, -3: 0.200 inch $\pm$ 0.010 inch (0.508 cm $\pm$ 0.025 cm)
-4, -5, -6: 0.165 inch $\pm$ 0.010 inch (0.419 cm $\pm$ 0.025 cm)

THICKNESS (At Edge):
-1, -2, -3: 0.075 inch $\pm$ 0.005 inch (0.160 cm $\pm$ 0.012 cm)
-4, -5, -6: 0.063 inch $\pm$ 0.005 inch (0.160 cm $\pm$ 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The missile for the regular size badges (Dash No. -1, -2, and -3) shall be superimposed and secured to the base by two rivets. The rivets shall be located on the vertical center line of the missile, equidistant from each end and 1 inch $\pm$ 1/16 inch (2.54 cm $\pm$ 0.16 cm) apart. The missile for miniature size badges (Dash No. -4, -5, and -6) shall be superimposed and secured to the base by one rivet. The rivet shall be centered on the vertical center line of the missile. The missile may be soldered to the base for both the regular and miniature size badges.

4. A forcer may be used to bring up the missile, star and wreath. When a forcer is used to bring up the star, the prong located at the center of the star shall be a free length of 5/16 inch $\pm$ 1/64 inch (0.79 cm $\pm$ 0.04 cm) when measured from the back of the badge to the tip of the prong.

5. Attaching device shall be prong and clutch type located as follows:

a. Dash No. -1 and -4: The prongs shall be located on the vertical center line of the badge, equidistant from each end and 2 inches $\pm$ 1/64 inch (5.08 cm $\pm$ 0.04

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.

cm) apart for Dash No. -1 and 1-3/8 inch ± 1/64 inch (3.49 cm ± 0.04 cm) apart for Dash No. -4.

b. Dash No. -2 and -3: The prongs shall be located on the vertical center line of the badge with the top prong centered on the star and the lower prong 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) from the bottom of the badge.

c. Dash No. -5 and -6: The prongs shall be located on the vertical center line of the badge with the top prong centered on the star and the lower prong 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm) from the bottom of the badge.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH
Air Force – 11

Preparing activity:
Army - IH
(Project No. 8455-2008-136)

Review activities:
Air Force - 99
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.