NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/72H
23 August 2021
SUPERSEDING
MIL-DTL-3628/72G
20 October 2016

DETAIL SPECIFICATION SHEET

BADGE, OCCUPATIONAL, MISSILE WITH OPERATIONS CREW DESIGNATOR, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

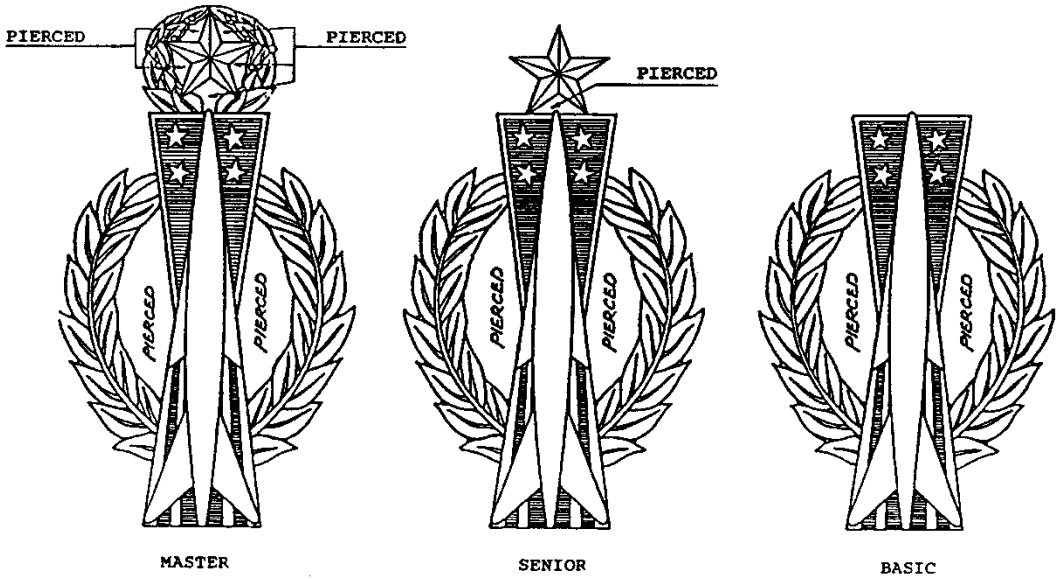

DASH NO.
-1: Basic, Regular Size
-2: Senior, Regular Size
-3: Master, Regular Size
-4: Basic, Miniature Size
-5: Senior, Miniature Size
-6: Master, Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No. C-752)

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.

FINISH: Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry Metal Finish Chip Number 16.

DIMENSIONS:

HEIGHT (Overall):

-1: 2-1/2 inches (6.35 cm) (REF)
-2: 3 inches (7.62 cm) (REF)
-3: 3-1/8 inches (7.94 cm) (REF)
-4: 1-25/32 inches (4.52 cm) (REF)
-5: 2-1/8 inches (5.40 cm) (REF)
-6: 2-1/4 inches (5.72 cm) (REF)

WIDTH (Overall):

-1, -2, -3: 1-3/4 inches (4.45 cm) (REF)
-4, -5, -6: 1-3/16 inches (3.02 cm) (REF)

THICKNESS (Assembled):

-1, -2, -3: 0.200 inch $\pm$ 0.010 inch (0.508 cm $\pm$ 0.025 cm)
-4, -5, -6: 0.165 inch $\pm$ 0.010 inch (0.419 cm $\pm$ 0.025 cm)

THICKNESS (At Edge):

-1, -2, -3: 0.075 inch $\pm$ 0.005 inch (0.160 cm $\pm$ 0.012 cm)
-4, -5, -6: 0.063 inch $\pm$ 0.005 inch (0.160 cm $\pm$ 0.012 cm)

ATTACHING DEVICE:

Attaching device shall be prong and clutch type located as follows:

a. For -1 and -4: The prongs shall be located on the vertical center line of the badge, equidistant from each end and 2 inches $\pm$ 1/64 inch apart for -1 and 1-3/8 inch $\pm$ 1/64 inch apart for -4.

b. For -2 and -3: The prongs shall be located on the vertical center line of the badge with the top prong centered on the star and the lower prong 1/4 inch $\pm$ 1/64 inch from the bottom of the badge.

c. For -5 and -6: The prongs shall be located on the vertical center line of the badge with the top prong centered on the star and the lower prong 3/16 inch $\pm$ 1/64 inch (0.48 cm $\pm$ 0.04 cm) from the bottom of the badge.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The missile for the regular size badges for -1, -2, and -3 shall be superimposed and secured to the base by two rivets. The rivets shall be located on the vertical center line of the missile, equidistant from each end and 1 inch $\pm$ 1/16 inch apart. The missile for miniature size badges for -4, -5, and -6 shall be superimposed and secured to the base by one rivet. The rivet shall be centered on the vertical center line of the missile. The missile may be soldered to the base for both the regular and miniature size badges.

4. A forcer may be used to bring up the missile, star and wreath. When a forcer is used to bring up the star, the prong located at the center of the star shall be a free length of 5/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.

inch ± 1/64 inch (0.79 cm ± 0.04 cm) when measured from the back of the badge to the tip of the prong.
CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-652)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:20Z
Check the source to verify that this is the current version before use.