MILITARY SPECIFICATION

PROBE AND S&A ASSEMBLY, TOW-2/E6

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements, quality assurance provisions, testing and packaging of a probe for use in the TOW-2A Guided Missile.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-S-14799	- Safety and Arming Device, Guided Missile: M114 LAP
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions for
MIL-P-70661	- Potted Circuit Card Assembly for TOW-2/E6 Probe and S&A Assembly

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament Munitions and Chemical Command, Attn. AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 1336

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedure and Tables for Inspection by Attributes

DOD-STD-2000 - Soldering Technology High Quality/High Reliability

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

US ARMY ARMAMENT, RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9231500 - Safety and Arming Device, GM:114
9387141 - TOW-2/E6 Probe and S&A Assembly

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all the requirements specified on drawings 9387141, 9231500, and all associated drawings and with all requirements specified in applicable specifications and standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

3.3 Item definition. The TOW-2/E6 Probe and S&A Assembly is an extendible device to increase warhead standoff containing an explosive charge assembly to defeat improved armor. A crush switch is provided at the forward tip of the probe and at the ogive immediately forward of the warhead. The probe is mechanically locked in the stowed position prior to launch and extends immediately after launch. The probe is actuated by a bore rider and extends by use of springs. Upon impact the charge assembly detonates and after a specified delay, the main charge initiates.

3.4 Safety and arming device. The Safety and Arming (S&A) Device shall conform to all requirements of MIL-S-14799. The S&A shall be in the safe condition for shipping. The piston actuator shall not be fired, the spring detent shall remain in the G-leaf slot and the rotor shall remain in the unaligned position. The piston actuator spacer (dwg. 9231496) shall be present. No shorting screw shall be present.

3.5 Storage temperature. The probe shall be able to meet all requirements when tested in the operational temperature range after it has been exposed to storage temperatures between -65°F and +155°F in the stowed position.

3.6 Transportation vibration. The probe with an inert S&A and an inert charge assembly shall not be visibly damaged and shall be able to meet all requirements after it is has been subjected to the transportation vibration test.

3.7 Launch shock. The probe with an inert S&A and an inert charge assembly shall not be visibly damaged and shall be able to meet all requirements after it has been subjected to the launch shock test.

3.8 Operational temperature. The probe shall be able to meet all requirements at temperature ranges from -25°F to +140°F regardless of temperature cycling.

3.9 Non-deployment. The probe shall not deploy when the flat of the bore rider button is released to a point 0.25 inches minimum from the surface of the ogive.

3.10 Deployment. The time from bore rider release to full extension of the probe shall not exceed 0.082 seconds. The bore rider shall be free to return to the retracted position after deployment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the currentversion before use.

3.11 Breakaway strength. The probe shall not retract when exposed to a breakaway force of 20.0 lbs minimum.

3.12 Length. The minimum length from the tip of a fully extended and locked probe to the assembly base shall be 16.443 inches.

3.13 Weight. The maximum weight of the stowed TOW-2/E6 Probe and S&A Assembly (dwg. 9387141) shall be 2.316 lbs. The weight of the deployed TOW-2/E6 Probe and S&A Assembly with a charge assembly (dwg. 9398046) shall not exceed 2.597 lbs.

3.14 Flight vibration. The probe with an inert S&A and an inert charge assembly shall not be visibly damaged and shall be able to meet all requirements after it has been subjected to the flight vibration test.

3.15 Runout. The circular runout of the outer tube of a deployed probe shall not exceed 0.020 inches.

3.16 Angular alignment. The angle formed between a line tangent to a point 2.5 inches aft of the probe tip and the warhead centerline shall not exceed 60 minutes with a load simulating the flight conditions of 15 pounds applied to the inner tube of a probe.

3.17 Open circuit test. The probe shall exhibit an open circuit (resistance greater than or equal to 1.0 megohm) across the detonator switch, tip switch, and ogive switch in either the deployed or stowed position.

3.18 Continuity circuit test. The probe shall show resistance less than or equal to 0.5 ohms for the tip ground circuit, ogive switch ground circuit, base S&A actuator circuit and ogive switch live circuit in either the deployed or stowed position. The stowed probe shall not show resistance of more than 0.5 ohms for the inner tip circuit, tip detonator firing circuit, tip actuator firing circuit.

3.19 Potted circuit card assembly. The potted circuit card assembly (dwg. 9399722) shall function in accordance with MIL-P-70661.

3.20 Soldering. Soldering procedures and acceptance criteria for the soldered components shall be in accordance with DOD-STD-2000.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

3.21 Control drawings. The contractor shall supply the Government a certificate of conformance and an inspection record (per DI-R-1724) for the following specification controlled components:

Drawing No.	Part
9231495	Lock washer
9388030	Button tip
9399715	Grommet
9399721	Connector
9399726	Shorting, bar
9399729	Adhesive, tip

3.22 Data requirements. The contractor shall generate data in accordance with requirements of data item description cited in 6.4.

3.23 Workmanship. The TOW-2/E6 Probe and S&A Assembly and its components shall be fabricated and finished in a thorough, workmanlike manner and shall be free of burrs, chips, sharp edges, unblended radii, cracks, surface defects, dirt, grease, rust, corrosion products and other foreign matter. Wires shall not be damaged during or after assembly. Solder connections shall be in accordance with DOD-STD-2000. The cleaning methods used shall not be injurious to any part, nor shall parts be contaminated by the cleaning agents. All required markings shall be clearly legible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspections. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the currentversion before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)

b. Quality conformance inspection (see 4.4)

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer, for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of 36 probes and 10 each of every subassembly and 10 each of every component. First article testing samples shall not be considered part of the production quantities.

4.3.2 Inspection to be performed. See MIL-A-48078 and Table I herein. Examine and test in the order listed the first 36 TOW-2/E6 Probe and S&A Assemblies in accordance with Table I and Figure I. Only gages or instruments approved byu the Government will be permitted to conduct the necessary inspections.

4.3.3 Rejection. See MIL-A-48078.

4.3.4 Completion. Upon completion of first article testing all probes, subassemblies and components shall be sent to:

Commander,
U.S. Army Armament, Research, Development and Engineering Center, ATTN: SMCAR-AEF-C,
Picatinny Arsenal, Dover, N.J. 07806-5000.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the currentversion before use.

TABLE I - First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE: TOW-2/E6 Probe and S&A Assembly		SHEET 1 OF 2		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Components				
	For each component: examination of defects	10		3.2	Corresponding CD sheet in 4.4.2
	Subassemblies				
	For each subassembly: examination of defects	10		3.2	Corresponding CD sheet in 4.4.2
	TOW-2/E6 Probe and S&A Assembly (Dwg. 9387141) (See Note 1)				
	Examination of defects (see Note 2)	36		3.2	4.4.2.60
	Safety and Arming device	36		3.4	4.5.1.1
	Storage temperature			3.5	4.5.2
	Hot (+155°F)	18			
	Cold (-65°F)	18			
	Transportation vibration	36		3.6	4.5.3/Table III
	Launch shock	36		3.7	4.5.4
	Operational temperature			3.8	4.5.5
	Ambient	12			
	Hot (+140°F)	12			
	Cold (-25°F)	12			

NOTES:
1. Test in order listed (see Figure 1)
2. Major characteristics 101 through 108 and 120 are not to be performed during first article.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

TABLE I - First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE: TOW-2/E6 Probe and S&A Assembly		SHEET 2 OF 2		DRAWING NUMBER: See below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	TOW-2/E6 Probe and S&A Assembly (Dwg. 9387141) continued				
	Non-deployment			3.9	4.5.6./4.5.6.1
	Ambient	12			
	Hot (+140°F)	12			
	Cold (-25°F)	12			
	Deployment			3.10	4.5.7
	Ambient	12			
	Hot (+140°F)	12			
	Cold (-25°F)	12			
	Breakaway strength	36		3.11	4.5.8
	Length	36		3.12	4.5.9
	Weight	36		3.13	4.5.10.1
	Flight vibration	36		3.14	4.5.11
	Breakaway strength	36		3.11	4.5.8
	Runout	36		3.15	4.5.12
	Angular alignment	36		3.16	4.5.13
	Open circuit	36		3.17	4.5.14/4.5.14.1
	Continuity circuit test	36		3.18	4.5.15/4.5.15.1
	Safety and arming device	36		3.4	4.5.1.1
	Potted circuit card assembly	36		3.19	4.5.16


NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

First Article Testing for TOW-2/E6 Probe and S&A Assembly

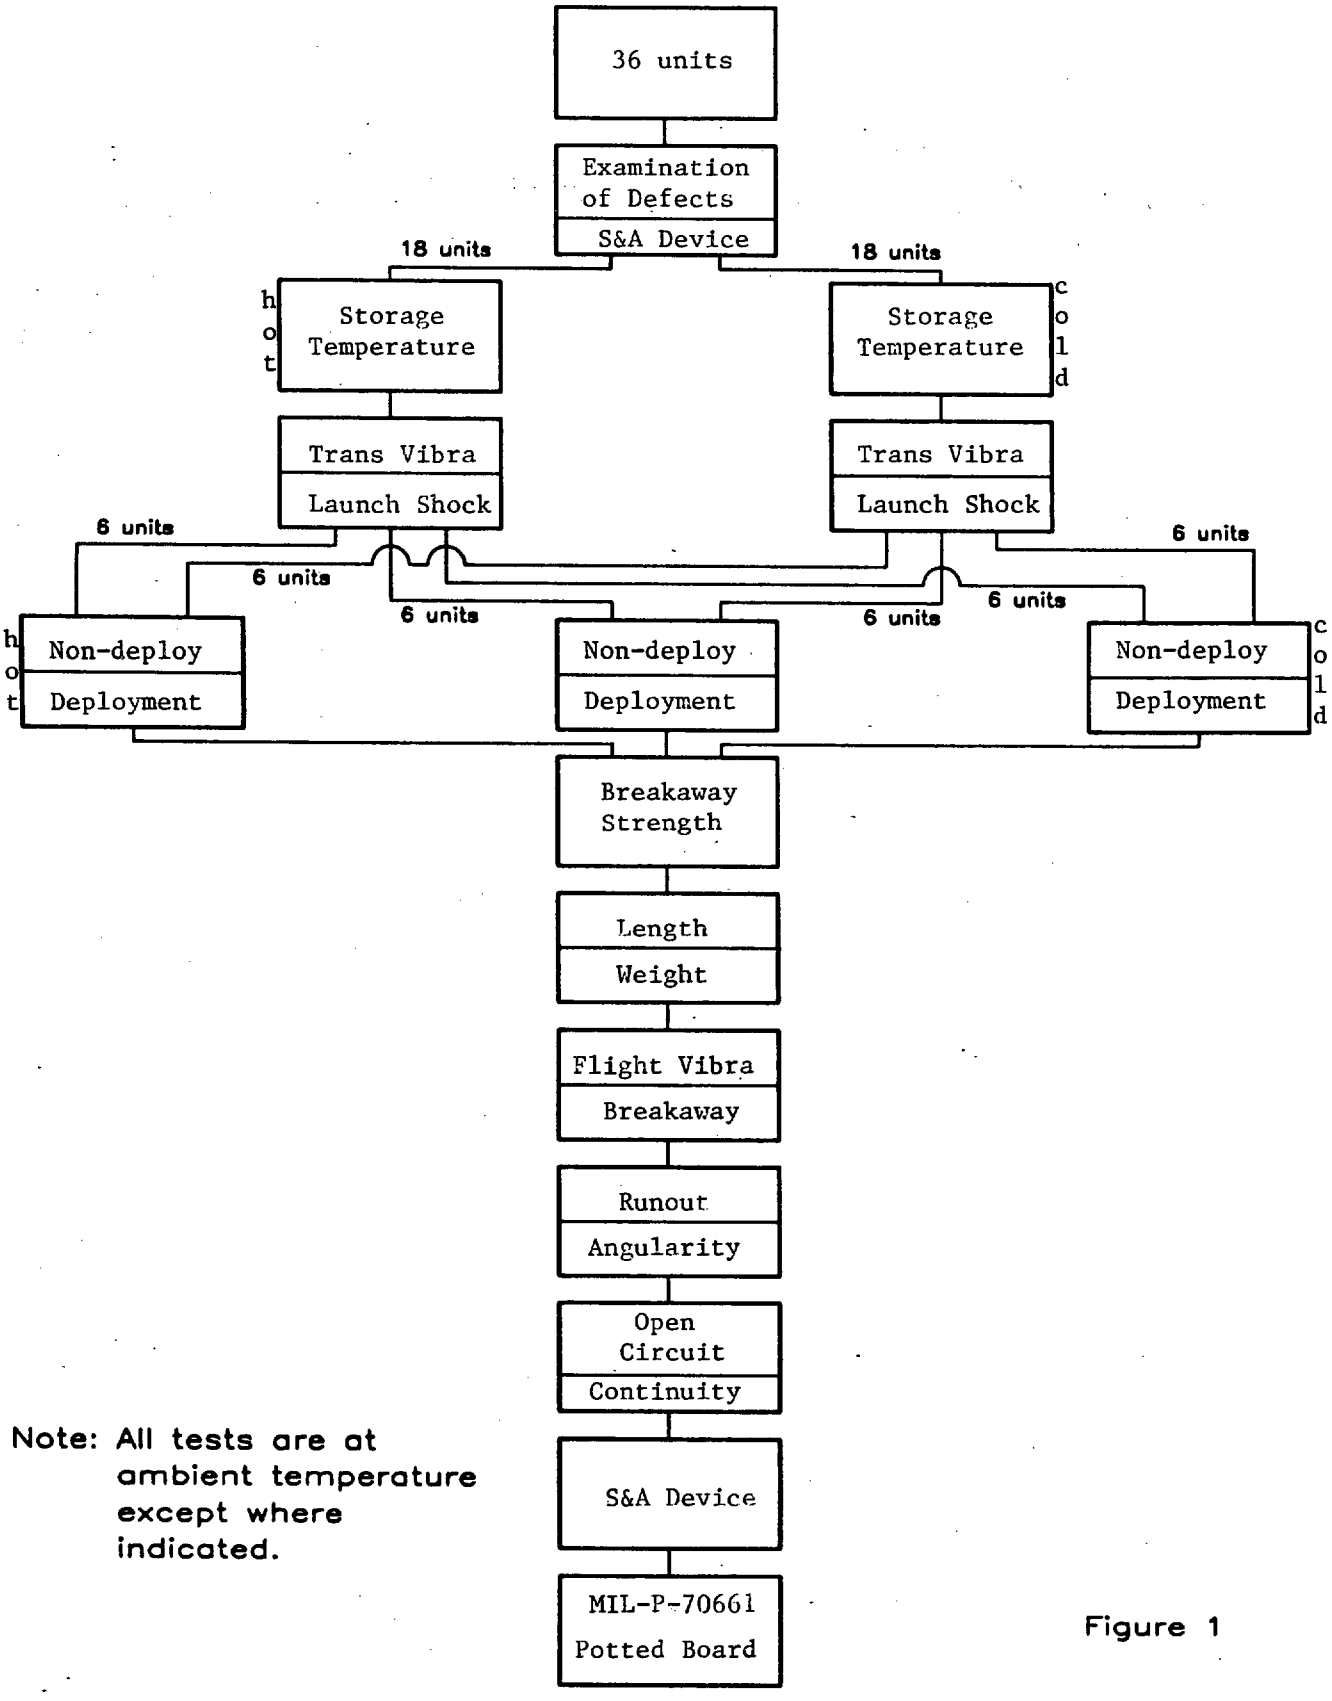

Note: All tests are at ambient temperature except where indicated.

Figure 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with formation provisions of MIL-A-48078. Lots shall not exceed three (3) calendar month's production or 5000 units.

4.4.2 Examination. Section 4.4.2 of MIL-A-48078. Unless otherwise specified in the Quality Conformance Inspection Tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Plate, Identification	1 OF 1	9342175
			NEXT HIGHER ASSEMBLY: 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Workmanship		1.0%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.2	Insulator, Base Contact	1 OF 1	9342179
			NEXT HIGHER ASSEMBLY: 9388021

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Locations of four holes		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certificate
202	Thickness		0.65%	3.2	Gage
203	Overall height		0.65%	3.2	Gage
204	Overall length		0.65%	3.2	Gage
205	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Plate, Release Mechanism	1 OF 1	9342181
			NEXT HIGHER ASSEMBLY: 9399686

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Locations of three holes in side		0.40%	3.2	Gage
102	Diameters of three holes in side		0.40%	3.2	Gage
MINOR					
201	Material thickness		0.65%	3.2	Gage
202	Location of hole in flange		0.65%	3.2	Gage
203	Diameter of hole in flange		0.65%	3.2	Gage
204	Contour of plan view		0.65%	3.2	Gage
205	Cracks at bend		0.65%	3.2	Visual
206	Protective finish is acceptable		0.65%	3.2	Visual
207	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Pin, Tube Lock	1 OF 1	9342182
			NEXT HIGHER ASSEMBLY: 9399709

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Size of hole		0.40%	3.2	Gage
102	True position of hole		0.40%	3.2	Gage
103	Diameter of straight shaft		0.40%	3.2	Gage
104	Overall length		0.40%	3.2	Gage
MINOR					
201	Finish		0.65%	3.2	Gage
202	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5	Tube Lock Pin Assembly	1 OF 1	9342183
			NEXT HIGHER ASSEMBLY: 9399686

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Presence of parts		0.40%	3.2	Visual
MINOR					
201	Lubricant present (see note 2 on dwg.)		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Washer, Saddle	1 OF 1	9342185
			NEXT HIGHER ASSEMBLY: 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Overall length		0.40%	3.2	Gage
102	Small width		0.40%	3.2	Gage
103	Diameter of hole		0.40%	3.2	Gage
104	Large width		0.40$	3.2	Gage
105	Thickness		0.40%	3.2	Gage
MINOR					
201	Workmanship		1.0%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.7	Post, Insulator	1 OF 1	9342186
			NEXT HIGHER ASSEMBLY: 9388021

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Proper dimensions		0.40%	3.2	Gage
MINOR					
201	Workmanship		1.0%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Shaft, Tube Lock Pin	1 OF 1	9342189
			NEXT HIGHER ASSEMBLY: 9399686

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Large diameter		0.40%	3.2	Gage
102	Medium diameters		0.40%	3.2	Gage
103	Length of medium diameters		0.40%	3.2	Gage
MINOR					
201	Small diameters		0.65%	3.2	Gage
202	Length of large diameter		0.65%	3.2	Gage
203	Protective finish is acceptable		0.65%	3.2	Visual
204	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.9	Spacer, Insulating	1 OF 1	9342191
			NEXT HIGHER ASSEMBLY: 9399682

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Material			3.1	Certification
202	Height of shoulder		0.65%	3.2	Gage
203	Small outside diameter		0.65%	3.2	Gage
204	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.10	Shaft, Bore Rider Arm	1 OF 1	9342192
			NEXT HIGHER ASSEMBLY: 9399686

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Large diameter		0.40%	3.2	Gage
102	Medium diameters		0.40%	3.2	Gage
MINOR					
201	Length of large diameter		0.65%	3.2	Gage
202	Lengths of medium diameters		0.65%	3.2	Gage
203	Protective finish is acceptable		0.65%	3.2	Visual
204	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.11	Sleeve, Tubelock Pin				9342193
					NEXT HIGHER ASSEMBLY
					9342183
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Small diameter		0.40%	3.2	Gage
102	Overall length		0.40%	3.2	Gage
103	Counterbore diameter		0.40%	3.2	Gage
MINOR					
201	Width of flange		0.65%	3.2	Gage
202	Slot widths		0.65%	3.2	Gage
203	Finish present		0.65%	3.2	Visual
204	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.12	Spacer, Release Mechanism	1 OF 1	9342196
			NEXT HIGHER ASSEMBLY 9399686

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Diameters of two end sections		0.65%	3.2	Gage
202	Diameter of center section		0.65%	3.2	Gage
203	Length of center section		0.65%	3.2	Gage
204	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 20260-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.13	Rivet, Drive Nylon	1 OF 1	9342198
			NEXT HIGHER ASSEMBLY: 9388021

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Material			3.1	Certification
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.14	Button, Bore Rider				9342214
					NEXT HIGHER ASSEMBLY 9387141
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Material			3.1	Certification
202	Thickness through center		0.65%	3.2	Gage
203	Diameter of hole		0.65%	3.2	Gage
204	Disc thickness		0.65%	3.2	Gage
205	Button O.D.		0.65%	3.2	Gage
206	Radius of outer surface		0.65%	3.2	Gage
207	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.15	Strain Relief		9388014
			NEXT HIGHER ASSEMBLY 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Length		0.40%	3.2	Gage
102	Outside diameter		0.40%	3.2	Gage
103	Length of nub		0.40%	3.2	Gage
104	Width of slots (2 places)		0.40%	3.2	Gage
105	True position of slots (2 places)		0.40%	3.2	Gage
MINOR					
201	Workmanship		1.0%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.16	Washer, Shoulder	1 OF 1	9388016
			NEXT HIGHER ASSEMBLY: 9388005

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Large outside diameter		0.40%	3.2	Gage
102	Small outside diameter		0.40%	3.2	Gage
103	Inside diameter		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Length of stem		0.65%	3.2	Gage
203	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.17	Contact, Base				9388019
					NEXT HIGHER ASSEMBLY 9388021
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Outside diameter of flange(see note 1)		0.40%	3.2	Gage
102	Inside diameter of flange (see note 1)		0.40%	3.2	Gage
103	Diameter of large circular hole		0.40%	3.2	Gage
104	True position of large circular hole		0.40%	3.2	Gage
MINOR					
201	Wall thickness		0.65%	3.2	Gage
202	Overall height		0.65%	3.2	Gage
203	Diameter of small circular hole		0.65%	3.2	Gage
204	True position of small circular hole		0.65%	3.2	Gage
205	Dimensions of square holes (4 places)		0.65%	3.2	Gage
206	True position square holes (4 places)		0.65%	3.2	Gage
207	Diameter of holes on tubular section (4 places)		0.65%	3.2	Gage
208	True position of holes on tubular section (4 places)		0.65%	3.2	Gage
209	Protective finish		0.65%	3.2	Visual
210	Workmanship		0.65%	3.23	Visual

NOTES:

Note 1: Gage dimensions in restrained position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9388021
4.4.2.18	Base Contact Assembly				NEXT HIGHER ASSEMBLY 9399682
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Proper installation of parts		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.19	Standoff	1 OF 1	9388023
			NEXT HIGHER ASSEMBLY: 9399682

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Large diameter		0.40%	3.2	Gage
102	Length "A"		0.40%	3.2	Gage
103	Nose length		0.40%	3.2	Gage
104	Diameter of knurl		0.40%	3.2	Gage
105	Length of knurled section		0.40%	3.2	Gage
MINOR					
201	Small diameter		0.65%	3.2	Gage
202	Protective finish		0.65%	3.2	Visual
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.20	Post, Threaded	1	1	9388040
				NEXT HIGHER ASSEMBLY: 9399717

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Overall length		0.40%	3.2	Gage
102	Outside diameter		0.40%	3.2	Gage
103	Pitch diameter of threads		0.40%	3.2	Gage
104	Minor diameter of threads		0.40%	3.2	Gage
MINOR					
201	Presence of slot		0.65%	3.2	Visual
202	Protective finish		0.65%	3.2	Visual
203	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.21	Wedge, Outer Tube	1 OF 1	9399651
			NEXT HIGHER ASSEMBLY: 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Taper angle		0.40%	3.2	Gage
102	Largest thickness		0.40%	3.2	Gage
103	Overall length		0.40%	3.2	Gage
104	Width of slot (See note 6 on dwg.)		0.40%	3.2	Gage
MINOR					
201	Protective finish		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.22	Wedge, Intermediate Tube	1 OF 1	9399652
			NEXT HIGHER ASSEMBLY: 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Taper angle		0.40%	3.2	Gage
102	Largest thickness		0.40%	3.2	Gage
103	Overall length		0.40%	3.2	Gage
104	Width of slot (See note 6 on dwg.)		0.40%	3.2	Gage
MINOR					
201	Protective finish		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.23	Insulator, Body		9399653
			NEXT HIGHER ASSEMBLY 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Overall length		0.40%	3.2	Gage
102	Large inside diameter (I.D.)		0.40%	3.2	Gage
103	Runout of large I.D.		0.40%	3.2	Gage
104	Small I.D.		0.40%	3.2	Gage
105	Runout of small I.D.		0.40%	3.2	Gage
106	Large outside diameter (O.D.)		0.40%	3.2	Gage
107	Small O.D.		0.40%	3.2	Gage
108	Runout of small O.D.		0.40%	3.2	Gage
109	Height to basic diameter		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Thickness (See note 1)	2		3.2	Gage
203	Presence of chamfer		0.65%	3.2	Visual
204	Workmanship		0.65%	3.23	Visual

NOTES:

Note 1: Destructive inspection, use 2 per incoming inspection lot.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.24	Insulator	1 OF 1	9399654
			NEXT HIGHER ASSEMBLY 9399684

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Inside Diameter (I.D.)		0.40%	3.2	Gage
102	Largest outside diameter (O.D.)		0.40%	3.2	Gage
103	Second largest O.D.		0.40%	3.2	Gage
104	True position second largest O.D.		0.40%	3.2	Gage
105	Aft O.D.		0.40%	3.2	Gage
106	True position aft O.D.		0.40%	3.2	Gage
107	Forward O.D.		0.40%	3.2	Gage
108	True position of forward O.D.		0.40%	3.2	Gage
109	Diameter of small holes (4 places)		0.40%	3.2	Gage
110	True position of small holes (4 places)		0.40%	3.2	Gage
111	Overall length		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Width of aft recess area for contacts		0.65%	3.2	Gage
203	O.D. at aft recess area for contacts		0.65%	3.2	Gage
204	O.D. between largest O.D. and second largest O.D.		0.65%	3.2	Gage
205	Length from aft end to first step		0.65%	3.2	Gage
206	Presence of chamfer		0.65%	3.2	Visual
207	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9399655
4.4.2.25	Housing, S & A				NEXT HIGHER ASSEMBLY 9399717
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Overall length		0.40%	3.2	Gage
102	Large outside diameter (O.D.)		0.40%	3.2	Gage
103	Small O.D.		0.40%	3.2	Gage
104	Large inside diameter (I.D.)		0.40%	3.2	Gage
105	Middle I.D.		0.40%	3.2	Gage
106	Small I.D.		0.40%	3.2	Gage
107	True position of small I.D.		0.40%	3.2	Gage
108	Length of base to datum A		0.40%	3.2	Gage
109	Diameter of "A" holes (4 places)		0.40%	3.2	Gage
110	True position of "A" holes (4 places)		0.40%	3.2	Gage
111	Diameter of "B" holes (2 places)		0.40%	3.2	Gage
112	True position of "B" holes (2 places)		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Length of exterior step		0.65%	3.2	Gage
203	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.26	Tip	1 OF 1	9399656
			NEXT HIGHER ASSEMBLY: 9399730

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Inside diameter		0.40%	3.2	Gage
102	Outside diameter		0.40%	3.2	Gage
103	Wall thickness		0.40%	3.2	Gage
104	Length from threaded end to shoulder		0.40%	3.2	Gage
105	Pitch diameter of threads		0.40%	3.2	Gage
106	Major diameter of threads		0.40%	3.2	Gage
107	Overall height		0.40%	3.2	Gage
108	Length of slot		0.40%	3.2	Gage
109	Thread undercut		0.40%	3.2	Gage
MINOR					
201	Protective finish		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.27	Holder, Carrier Spring	1 OF 1	9399657
			NEXT HIGHER ASSEMBLY 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Height of arms (3 places)		0.40%	3.2	Gage
102	Minor diameter of threaded hole		0.40%	3.2	Gage
103	Inside diameter of large hole		0.40%	3.2	Gage
104	Outside diameter of large hole		0.40%	3.2	Gage
MINOR					
201	Width of arms (3 places)		0.65%	3.2	Gage
202	True position of arm with hole		0.65%	3.2	Gage
203	Bend of arm (angle)		0.65%	3.2	Gage
204	Presence of slots		0.65%	3.2	Visual
205	Protective finish		0.65%	3.2	Visual
206	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.28	Post	1	1	9399658
				NEXT HIGHER ASSEMBLY: 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Pitch diameter of external thread		0.40%	3.2	Gage
102	Major diameter of external thread		0.40%	3.2	Gage
103	Pitch diameter of internal thread		0.40%	3.2	Gage
104	Minor diameter of internal thread		0.40%	3.2	Gage
105	Length from second step to aft		0.40%	3.2	Gage
106	Aft end diameter		0.40%	3.2	Gage
MINOR					
201	Presence of chamfer		0.65%	3.2	Visual
202	Presence of slot		0.65%	3.2	Visual
203	Protective finish		0.65%	3.2	Visual
204	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570a, 1 Apr 85

Replaces DRDAR-QA Form 160a, 1 Jun 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.29	Retainer, Spring	1 OF 1	9399659
			NEXT HIGHER ASSEMBLY: 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Diameter of flange		0.40%	3.2	Gage
102	Inside diameter		0.40%	3.2	Gage
103	Height		0.40%	3.2	Gage
104	Thickness of flange		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Workmanship		1.00%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.30	Spring, Tube	1 OF 1	9399660
			NEXT HIGHER ASSEMBLY 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Total number of coils		0.40%	3.2	Visual
102	Outside diameter at both ends (see note 7 on dwg.)		0.40%	3.2	Gage
103	Outside diameter of body		0.40%	3.2	Gage
104	Compression of spring (see note 5 on dwg.)		0.40%	3.2	Gage
MINOR					
201	Wire diameter		0.65%	3.2	Gage
202	Direction of helix		0.65%	3.2	Visual
203	Overall free length		0.65%	3.2	Gage
204	Protective finish		0.65%	3.2	Visual
205	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.31	Tube, Intermediate				9399661
					NEXT HIGHER ASSEMBLY
					9399681
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Length of elongated hole		0.40%	3.2	Gage
102	Width of elongated hole		0.40%	3.2	Gage
103	True position of elongated hole		0.40%	3.2	Gage
104	Perpendicularity of elongated hole with Datum B		0.40%	3.2	Gage
105	Inside diameter (I.D.) of tube		0.40%	3.2	Gage
106	Runout of I.D. of tube		0.40%	3.2	Gage
107	Outside diameter (O.D.) of tube (Datum A)		0.40%	3.2	Gage
108	Length of interior groove		0.40%	3.2	Gage
109	Diameter of interior groove		0.40%	3.2	Gage
110	Runout of interior groove		0.40%	3.2	Gage
111	O.D. of taper		0.40%	3.2	Gage
112	Runout of O.D. of taper		0.40%	3.2	Gage
113	Overall length		0.40%	3.2	Gage
114	Depth of shear tabs		0.40%	3.2	Gage
115	Height of straight shear (see note 1)		0.40%	3.2	Gage

NOTES: Note 1: If a gage is not available perform a destructive test by cross sectioning five (5) tubes per incoming lot.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.31	Tube, Intermediate	2 OF 2	9399661
			NEXT HIGHER ASSEMBLY: 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
201	Angle of taper		0.65%	3.2	Gage
202	Width of slot		0.65%	3.2	Gage
203	Depth of slot		0.65%	3.2	Gage
204	True position of slot		0.65%	3.2	Gage
205	Presence of chamfer at aft end		0.65%	3.2	Visual
206	Presence of chamfer at forward end		0.65%	3.2	Visual
207	Protective finish		0.65%	3.2	Visual
208	Workmanship		0.65%	3.2	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.32	Tube, Inner				9399662
					NEXT HIGHER ASSEMBLY 9399681
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Tube outside diameter (O.D)		0.40%	3.2	Gage
102	Tube inside diameter (I.D.)		0.40%	3.2	Gage
103	Runout of tube I.D.		0.40%	3.2	Gage
104	Minimum full thread		0.40%	3.2	Gage
105	Pitch diameter of largest threads		0.40%	3.2	Gage
106	Minor diameter of largest threads		0.40%	3.2	Gage
107	True position of largest threads		0.40%	3.2	Gage
108	Large taper O.D.		0.40%	3.2	Gage
109	Runout of large taper O.D.		0.40%	3.2	Gage
110	Small tapered end O.D.		0.40%	3.2	Gage
111	Runout of small tapered end O.D.		0.40%	3.2	Gage
112	Tapered end I.D.		0.40%	3.2	Gage
113	Runout of tapered end I.D.		0.40%	3.2	Gage
114	Middle tapered end O.D.		0.40%	3.2	Gage
115	Runout of middle tapered end O.D.		0.40%	3.2	Gage
116	Pitch diameter of small threads (3 places)		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9399662
4.4.2.32	Tube, Inner				NEXT HIGHER ASSEMBLY 9399681
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MAJOR					
117	Minor diameter of small threads (3 places)		0.40%	3.2	Gage
118	True position of small holes (3 places)		0.40%	3.2	Gage
119	Overall length		0.40%	3.2	Gage
120	Diameter of large hole		0.40%	3.2	Gage
121	True position of large hole		0.40%	3.2	Gage
MINOR					
201	Angle of taper		0.65%	3.2	Gage
202	Protective finish (see note 5 & 6 on dwg.)		0.65%	3.2	Visual
203	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.33	Tube, Outer	1 OF 2	9399663
			NEXT HIGHER ASSEMBLY: 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Length of forward inner groove		0.40%	3.2	Gage
102	Diameter of forward inner groove		0.40%	3.2	Gage
103	True position of forward inner groove		0.40%	3.2	Gage
104	Length of elongated hole		0.40%	3.2	Gage
105	Width of elongated hole		0.40%	3.2	Gage
106	True position of elongated hole		0.40%	3.2	Gage
107	Perpendicularity of elongated hole with Datum B		0.40%	3.2	Gage
108	Outside diameter (O.D.) of tube (Datum A)		0.40%	3.2	Gage
109	Inside diameter (I.D.) of tube		0.40%	3.2	Gage
110	True position of tube I.D.		0.40%	3.2	Gage
111	O.D. of taper		0.40%	3.2	Gage
112	Runout of taper O.D.		0.40%	3.2	Gage
113	Depth of aft notches (3 places)		0.40%	3.2	Gage
114	Width of aft notches (3 places)		0.40%	3.2	Gage
115	True position of aft notches (3 places)		0.40%	3.2	Gage
116	Depth of forward notch		0.40%	3.2	Gage

NOTES:

AMSMC Form 1570, 1 Feb 85 — Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.33	Tube, Outer	2 OF 2	9399663
			NEXT HIGHER ASSEMBLY: 9399681

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
117	Width of forward notch		0.40%	3.2	Gage
118	True position of forward notch		0.40%	3.2	Gage
119	Width of stop ring groove		0.40%	3.2	Gage
120	Length from forward end to inner groove step		0.40%	3.2	Gage
121	Overall length		0.40%	3.2	Gage
122	Width of aft snap ring groove		0.40%	3.2	Gage
123	Length from aft end to aft snap ring groove		0.40%	3.2	Gage
124	Depth of shear tabs		0.40%	3.2	Gage
125	Height of straight shear (see note 1)		0.40%	3.2	Gage
MINOR					
201	Angle of taper		0.65%	3.2	Gage
202	Presence of chamfer		0.65%	3.2	Visual
203	Protective finish		0.65%	3.2	Visual
204	Workmanship		0.65%	3.23	Visual

NOTES: 1. If a gage is not available perform a destructive test by cross sectioning five (5) tubes per incoming lot.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.34	Inner Tip		9399664
			NEXT HIGHER ASSEMBLY 9399684

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Outside diameter (O.D.) at forward end		0.40%	3.2	Gage
102	O.D. at aft end		0.40%	3.2	Gage
103	True position of O.D. at aft end		0.40%	3.2	Gage
104	Overall length		0.40%	3.2	Gage
105	Diameter of aft holes (4 places)		0.40%	3.2	Gage
106	True position of aft holes (4 places)		0.40%	3.2	Gage
MINOR					
201	Thickness of flanged area		0.65%	3.2	Gage
202	Presence of forward holes		0.65%	3.2	Visual
203	Protective finish		0.65%	3.2	Visual
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.35	Frame	1	3	9399665
				NEXT HIGHER ASSEMBLY: 9399682

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Outside diameter (O.D.) of forward end		0.40%	3.2	Gage
102	True position of forward end O.D.		0.40%	3.2	Gage
103	Small inside diameter (I.D.) within zone	A	0.40%	3.2	Gage
104	True position of small I.D.		0.40%	3.2	Gage
105	Large O.D. - Datum A		0.40%	3.2	Gage
106	Length of large elongated hole		0.40%	3.2	Gage
107	Width of large elongated hole		0.40%	3.2	Gage
108	True position of large elongated hole		0.40%	3.2	Gage
109	Minor diameter of forward thread		0.40%	3.2	Gage
110	True position of forward thread		0.40%	3.2	Gage
111	Length of aft elongated holes (6 places)		0.40%	3.2	Gage
112	Width of aft elongated holes (6 places)		0.40%	3.2	Gage
113	True position of aft elongated holes (6 places)		0.40%	3.2	Gage

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 9399665
4.4.2.35	Frame				NEXT HIGHER ASSEMBLY 9399682
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
114	Large diameter of board mounting hole		0.40%	3.2	Gage
115	True position of large board mounting hole		0.40%	3.2	Gage
116	Small diameter of board mounting holes (4 places)		0.40%	3.2	Gage
117	True position of small board mounting holes (4 places)		0.40%	3.2	Gage
118	Diameter of aft holes (6 places)		0.40%	3.2	Gage
119	True position of aft holes (6 places)		0.40%	3.2	Gage
120	Diameter of base contact mounting holes (4 places)		0.40%	3.2	Gage
121	True position of contact base mounting holes (4 places)		0.40%	3.2	Gage
122	Diameter of forward holes (6 places		0.40%	3.2	Gage
123	True position of forward holes (6 places)		0.40%	3.2	Gage
124	Overall height		0.40%	3.2	Gage
125	Diameter of countersunk holes (3 places)		0.40%	3.2	Gage
126	True position of countersunk holes (3 places)		0.40%	3.2	Gage
127	Taper angle		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.35	Frame	3 OF 3	9399665
			NEXT HIGHER ASSEMBLY 9399682

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
201	Width of extension spring grooves (3 places)		0.65%	3.2	Gage
202	Diameter of release mechanism mounting hole (2 places)		0.65%	3.2	Gage
203	True position of release mechanism mounting holes (2 places)		0.65%	3.2	Gage
204	Thickness of aft end		0.65%	3.2	Gage
205	Length of rectangular holes (2 places)		0.65%	3.2	Gage
206	Width of rectangular holes (2 places)		0.65%	3.2	Gage
207	Length of elongated hole		0.65%	3.2	Gage
208	Width of elongated hole		0.65%	3.2	Gage
209	Anodize (see note 5 on dwg.)		0.65%	3.2	Visual
210	Protective finish		0.65%	3.2	Visual
211	Workmanship		0.65%	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.36	Ogive				9399666
					NEXT HIGHER ASSEMBLY
					9399683
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Aft inside diameter (I.D.) - Datum A		0.40%	3.2	Gage
102	Aft outside diameter (O.D.)		0.40%	3.2	Gage
103	Diameter of large forward hole		0.40%	3.2	Gage
104	True position of large forward hole		0.40%	3.2	Gage
105	Diameter of bore rider exit hole		0.40%	3.2	Gage
106	True position of bore rider exit hole		0.40%	3.2	Gage
107	Diameter of "E" holes (6 places)		0.40%	3.2	Gage
108	True position of "E" holes (6 places)		0.40%	3.2	Gage
109	Diameter of forward holes (6 places)		0.40%	3.2	Gage
110	True position of forward holes (6 places)		0.40%	3.2	Gage
111	Diameter of safety knob hole		0.40%	3.2	Gage
112	True position of safety knob hole		0.40%	3.2	Gage
113	Diameter of rivnut holes (5 places)		0.40%	3.2	Gage
114	Overall height		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.36	Ogive	2 OF 2	9399666
			NEXT HIGHER ASSEMBLY 9399683

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
201	Forward I.D.		0.65%	3.2	Gage
202	True position of forward I.D.		0.65%	3.2	Gage
203	Diameter of access hole		0.65%	3.2	Gage
204	Wall thickness in zone D		0.65%	3.2	Gage
205	Width of depressed flat		0.65%	3.2	Gage
206	Length of conduit support bump		0.65%	3.2	Gage
207	Width of conduit support bump		0.65%	3.2	Gage
208	Length of notch		0.65%	3.2	Gage
209	Depth of notch		0.65%	3.2	Gage
210	Protective finish		0.65%	3.2	Visual
211	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.37	Spring, Probe Extension	1 OF 1	9399667
			NEXT HIGHER ASSEMBLY: 9399682

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Direction of helix		0.40%	3.2	Visual
MINOR					
201	Wire diameter		0.65%	3.2	Gage
202	Spring diameter		0.65%	3.2	Gage
203	Number of coils		0.65%	3.2	Visual
204	Extended length inside ends without loss of coil contact		0.65%	3.2	Gage
205	Protective finish		0.65%	3.2	Visual
206	Workmanship		0.65%	3.2	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.38	Ring, Stop	1 OF 1	9399668
			NEXT HIGHER ASSEMBLY 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Width of slot (see note 4 on dwg.)		0.65%	3.2	Gage
202	Thickness		0.65%	3.2	Gage
203	Finish		0.65%	3.2	Visual
204	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9399669
4.4.2.39	Anchor, Spring				NEXT HIGHER ASSEMBLY 9399682
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Hole diameter		0.65%	3.2	Gage
202	True position of hole		0.65%	3.2	Gage
203	Diameter		0.65%	3.2	Gage
204	Protective finish		0.65%	3.2	Visual
205 (1)	Workmanship (See note 1)		0.65%	3.23	Visual

NOTES:

1. Altered item drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.40	Insulator, Contact				9399670
					NEXT HIGHER ASSEMBLY 9387141
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Small inside diameter (I.D.)		0.40%	3.2	Gage
102	True position of small I.D.		0.40%	3.2	Gage
103	Large I.D. (2 places)		0.40%	3.2	Gage
104	Outside diameter		0.40%	3.2	Gage
105	Width of counterbore grooves (3 places)		0.40%	3.2	Gage
106	True position of counterbore grooves (3 places)		0.40%	3.2	Gage
107	Diameter of holes (3 places)		0.40%	3.2	Gage
108	True position of holes (3 places)		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Workmanship		1.0%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9399671
4.4.2.41	Contact Ring, Tip				NEXT HIGHER ASSEMBLY 9399684
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Overall height		0.40%	3.2	Gage
102	Height of band		0.40%	3.2	Gage
103	Hole diameter		0.40%	3.2	Gage
104	Slot dimensions (3 places) (see note 4 on dwg.)		0.40%	3.2	Gage
105	Inside diameter (see note 4 on dwg)		0.40%	3.2	Gage
MINOR					
201	Presence of fingers		0.65%	3.2	Visual
202	Protective finish		0.65%	3.2	Visual
201	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.42	Contact Ring	1	1	9399672
				NEXT HIGHER ASSEMBLY: 9399717

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Overall height		0.40%	3.2	Gage
102	Height of band		0.40%	3.2	Gage
103	Diameter of holes (3 places)		0.40%	3.2	Gage
MINOR					
201	Location of holes		0.65%	3.2	Gage
202	Presence of teeth		0.65%	3.2	Visual
203	Presence of spot weld		0.65%	3.2	Visual
204	Protective finish		0.65%	3.2	Visual
205	Workmanship		0.65%	3.23	Visual

NOTES:

Part to be inspected in restrained condition.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.43	Tube Assembly				9399681
					NEXT HIGHER ASSEMBLY 9387141
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Presence of shear tabs (2 tubes)		100%	3.2	Visual
102	Fit of spring		0.40%	3.2	Visual
MINOR					
201	Presence of Parts		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.44	Frame and Release Mechanism Assy.				9399682
					NEXT HIGHER ASSEMBLY
					9387141
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Torque on nut (see note 2 on dwg.)		0.40%	3.2	Gage
102	Pushout force (see note 3 on dwg.)		0.40%	3.2	Gage
103	Presence of standoffs (5 places)		0.40%	3.2	Visual
104	Presence of washer insulator		0.40%	3.2	Visual
105	Presence of insulating spacer		0.40%	3.2	Visual
MINOR					
201	Presence of parts		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.45	Ogive Assembly	1 OF 1	9399683
			NEXT HIGHER ASSEMBLY 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Torque of rivnuts (see note 2 on dwg.)		0.65%	3.2	Gage
202	Height of rivnut		0.65%	3.2	Gage
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.46	Inner Tip Assembly	1 OF 1	9399684
			NEXT HIGHER ASSEMBLY: 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	None defined				
MINOR					
201	Presence of parts		0.65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.47	Release Mechanism Assembly				9399686
					NEXT HIGHER ASSEMBLY 9399682
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Stake shall support 2 lbs. unseating force without separation (see note 3 on dwg)		0.40%	3.2	Gage
102	End shake adequate (see note 4 on dwg.)		0.40%	3.2	Gage
103	Evidence of lubricant (see note 2 on dwg.)		0.40%	3.2	Visual
MINOR					
201	Presence of parts		0 65%	3.2	Visual
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.48	Arm, Bore Rider	1 OF 1	9399687
			NEXT HIGHER ASSEMBLY: 9399686

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Width of datum A		0.40%	3.2	Gage
102	Diameter of hole on top flat		0.40%	3.2	Gage
103	Minimum depth of hole on top flat		0.40%	3.2	Gage
104	True position of hole on top flat		0.40%	3.2	Gage
105	Length of elongated hole		0.40%	3.2	Gage
106	Width of elongated hole		0.40%	3.2	Gage
107	True position of elongated hole		0.40%	3.2	Gage
108	Diameter of large circular hole		0.40%	3.2	Gage
109	Length from large circular hole to top flat		0.40%	3.2	Gage
110	Length from large circular hole to bottom flat		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Workmanship		1.0%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.49	Wire Assembly	1 OF 1	9399697
			NEXT HIGHER ASSEMBLY: 9387141

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Continuity		0.40%	3.2	ohmmeter
102	Insulation intact (no breaks)		0.40%	3.2	Visual
MINOR					
201	Wire Length		0.65%	3.2	Gage
202	Presence of soldered lug (see note 4 on dwg.)		0.65%	3.2	Visual
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.50	Insulator, Washer	1 OF 1	9399701
			NEXT HIGHER ASSEMBLY: 9399682

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Material			3.1	Certification
202	Thickness		0.65%	3.2	Gage
203	Outside diameter		0.65%	3.2	Gage
204	Inside diameter		0.65%	3.2	Gage
205	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9399703
4.4.2.51	Standoff				NEXT HIGHER ASSEMBLY 9399682
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Length of internal thread section		0.65%	3.2	Gage
202	Length of external thread section		0.65%	3.2	Gage
203	Internal threads		0.65%	3.2	Gage
204	External threads		0.65%	3.2	Gage
205	Presence of protective finish		0.65%	3.2	Visual
206	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.52	Knob				9399705
					NEXT HIGHER ASSEMBLY 9399710
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Inside diameter		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Outside diameter		0.65%	3.2	Gage
203	Length		0.65%	3.2	Gage
204	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.53	Shaft	1	1	9399706

NEXT HIGHER ASSEMBLY: 93999710

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Overall length		0.40%	3.2	Gage
102	Pitch diameter of threads		0.40%	3.2	Gage
103	Major diameter of threads		0.40%	3.2	Gage
104	Diameter of knurled section		0.40%	3.2	Gage
105	Second largest diameter		0.40%	3.2	Gage
106	Largest diameter		0.40%	3.2	Gage
107	Length from stop to end		0.40%	3.2	Gage
MINOR					
201	Length from threads to stop		0.65%	3.2	Gage
202	Protective finish		0.65%	3.2	Visual
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.54	Cam				9399707
					NEXT HIGHER ASSEMBLY 9399710
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Inner inside diameter		0.40%	3.2	Gage
102	Distance from outside diameter to flat		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
MINOR					
201	Material			3.1	Certification
202	Small thickness		0.65%	3.2	Gage
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.55	Safety Knob Assembly				9399710
					NEXT HIGHER ASSEMBLY 9387141
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Presence of parts		0.65%	3.2	Visual
202	Pushout force (See note 2 on Dwg.)		0.65%	3.2	Gage
203	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.56	S&A Housing Assembly				9399717
					NEXT HIGHER ASSEMBLY 9387141
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Torque on screws		0.65%	3.2	Gage
202	Presence of parts		0.65%	3.2	Visual
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.57	Washer, Single Wave				9399718
					NEXT HIGHER ASSEMBLY 9399710
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Outside diameter		0.65%	3.2	Gage
202	Inside diameter		0.65%	3.2	Gage
203	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9399727
4.4.2.58	Ring, Crush				NEXT HIGHER ASSEMBLY 9387141
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Outside diameter of large flange		0.40%	3.2	Gage
102	True position of large flange		0.40%	3.2	Gage
103	Inside diameter of large flange		0.40%	3.2	Gage
104	Outside diameter of small flange		0.40%	3.2	Gage
105	True position of small flange		0.40%	3.2	Gage
106	Height		0.40%	3.2	Gage
MINOR					
201	Thickness		0.65%	3.2	Gage
202	Workmanship		0.65%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.59	Tip Assembly				9399730
					NEXT HIGHER ASSEMBLY
					9387141/9388046
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Presence of Adhesive		100%	3.2	Visual
202	Workmanship		100%	3.23	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 9387141
4.4.2.60	TOW-2/E6 Probe and S&A Assembly				NEXT HIGHER ASSEMBLY 9388046
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL					
1	Modified M114 S&A device in safe position (See note 1 for critical defects)		100%	3.4	4.5.1.2.a/Visual
MAJOR					
101	Non-deployment of probe at ambient temperature (see note 2)		100%	3.9	4.5.6/4.5.6.2.a
102	Probe deployment at ambient temperature (see note 2)		100%	3.10	4.5.7/4.5.7.1
103	Breakaway strength (see note 2)		0.40%	3.11	4.5.8
104	Length (see note 2)		100%	3.12	4.5.9
105	Shorting screw removed from S&A (see figure 2)		100%	3.2	Visual
106	Open circuit test (stowed)		100%	3.17	4.5.14/4.5.14.2.a
107	Continuity (stowed)		100%	3.18	4.5.15/4.5.15.2.a
108	Weight (stowed)		0.40%	3.13	4.5.10.2.a
109	Probe stowed properly		100%	3.2	Visual
110	Gap between probe assembly and rear of safety knob assembly		0.40%	3.2	Gage
111	Torque on bore rider button screw (see note 15 on dwg.)		0.40%	3.2	Gage
112	Torque on self-tapping pan head screw (see note 3 on dwg.)		0.40%	3.2	Gage
113	Torque on pan head screw - 7 places (see note 3 on dwg.)		0.40%	3.2	Gage

NOTES:
1. Data item description DI-R-1721 applied to the critical defects, supply report whenever critical defects are found.
2. No S&A mechanism assembly (dwg. 9388005) shall be present for these tests.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-48698 (AR)


PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.60	TOW 2/E6 Probe and S&A Assembly	2 OF 2	9387141
			NEXT HIGHER ASSEMBLY 9398046

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MAJOR					
114	Torque on screw - 2 places (see note 3 on dwg.)		0.40%	3.2	Gage
115	Torque on flat socket head screw (see note 15 on dwg.)		0.40%	3.2	Gage
116	Torque on post (see note 4 on dwg.)		0.40%	3.2	Gage
117	Diameter of assembly (see note 8 on dwg.)		0.40%	3.2	Gage
118	Wires soldered to appropriate terminals (see note 10 on dwg.)		0.40%	3.2	Visual
119	Torque on pan head screw (2 places)		0.40%	3.2	Gage
120	Lot quality confirmation test	36			4.4.3.2/Table II
MINOR					
201	Presence of identification plate (see note 2 on dwg.)		0.65%	3.2	Visual
202	Presence of thread locking compound (see note 5 on dwg.)		0.65%	3.2	Visual
203	Rivets seated properly (see note 9 on dwg.)		0.65%	3.2	Visual
204	Presence of connector		0.65%	3.2	Visual
205	Presence of shorting bar (see note 14 on dwg.)		0.65%	3.2	Visual
206	Workmanship		0.65%	3.23	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:57Z
Check the source to verify that this is the current version before use.

TOW-2/E6 Probe and S&A Assembly

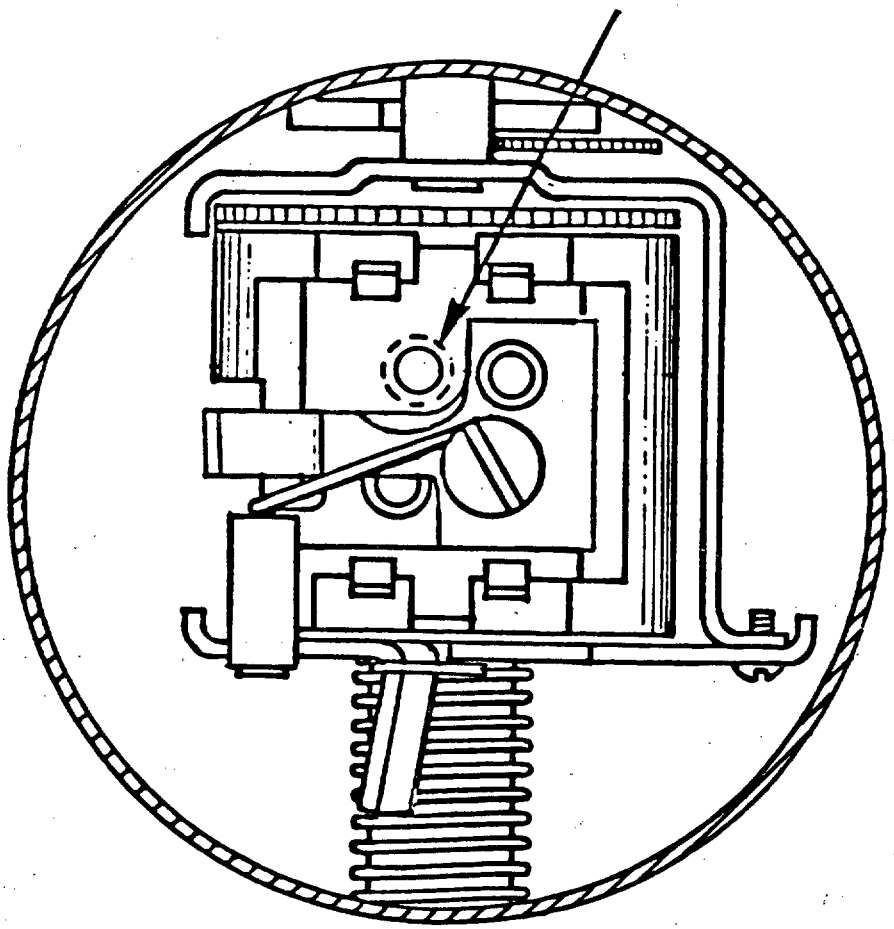

Safe Condition of Safety and Arming Device

Figure 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in First Article and Quality Conformance Inspection , and as follows.

4.4.3.1 Quality conformance. Any item failing to meet the requirements during quality conformance inspection shall be classified defective and removed.

4.4.3.2 Lot quality confirmation testing. A quantity of 36 TOW-2/E6 Probe and S&A Assemblies shall be tested in the sequence shown in Table II and Figure 3. This quantity is valid for lot sizes up to 5000 units. All inspection shall be classified as Major unless otherwise specified. Any item failing to meet the requirements during lot quality confirmation testing (LQCT) shall cause the lot to be rejected. LQCT shall be considered destructive, hence, no test samples may be included in a deliverable quantity. Upon completion, all LQCT samples will set aside until the contractor receives written approval from the Contracting Officer to destroy.

4.4.4 Inspection equipment. The inspection equipment required to perform the examination and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See section 6 of MIL-A-48078 and 6.3 herein.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:57Z
Check the source to verify that this is the currenversion before use.

TABLE II

Lot Quality Confirmation Testing


Test in Order Listed (see Figure 3)

TEST		SAMPLE NUMBERS 1-2	3-4	5-6	7-8	9-18	19-28	29-36
4.5.1.2.b	Safety and arming device	X	X	X	X	X	X	X
4.5.3	Transportation vibration		X	X	X			
4.5.4	Launch shock		X	X	X			
4.5.5	Operational temperature	X	X	C	H	C	H	X
4.5.6.2.b	Non-deployment	X	X	C	H	C	H	X
4.5.7	Deployment	X	X	C	H	C	H	X
4.5.8	Breakaway strength	X	X	X	X	X	X	X
4.5.9	Length	X	X	X	X	X	X	X
4.5.10.2.b	Weight	X	X	X	X	X	X	X
4.5.11	Flight vibration		X	X	X			
4.5.8	Breakaway strength		X	X	X			
4.5.12	Runout	X	X	X	X			
4.5.13	Angular alignment	X	X	X	X			
4.5.14.2.b	Open circuit	X	X	X	X	X	X	X
4.5.15.2.b	Continuity circuit	X	X	X	X	X	X	X
4.5.1.2.b	Safety and arming device	X	X	X	X	X	X	X
4.5.16	Potted circuit card assy	X	X	X	X	X	X	X

NOTE: X represents units to be tested at ambient temperature
C represents units to be tested at cold temperature (-25°F)
H represents units to be tested at hot temperature (+140°F)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

Lot Quality Confirmation Testing

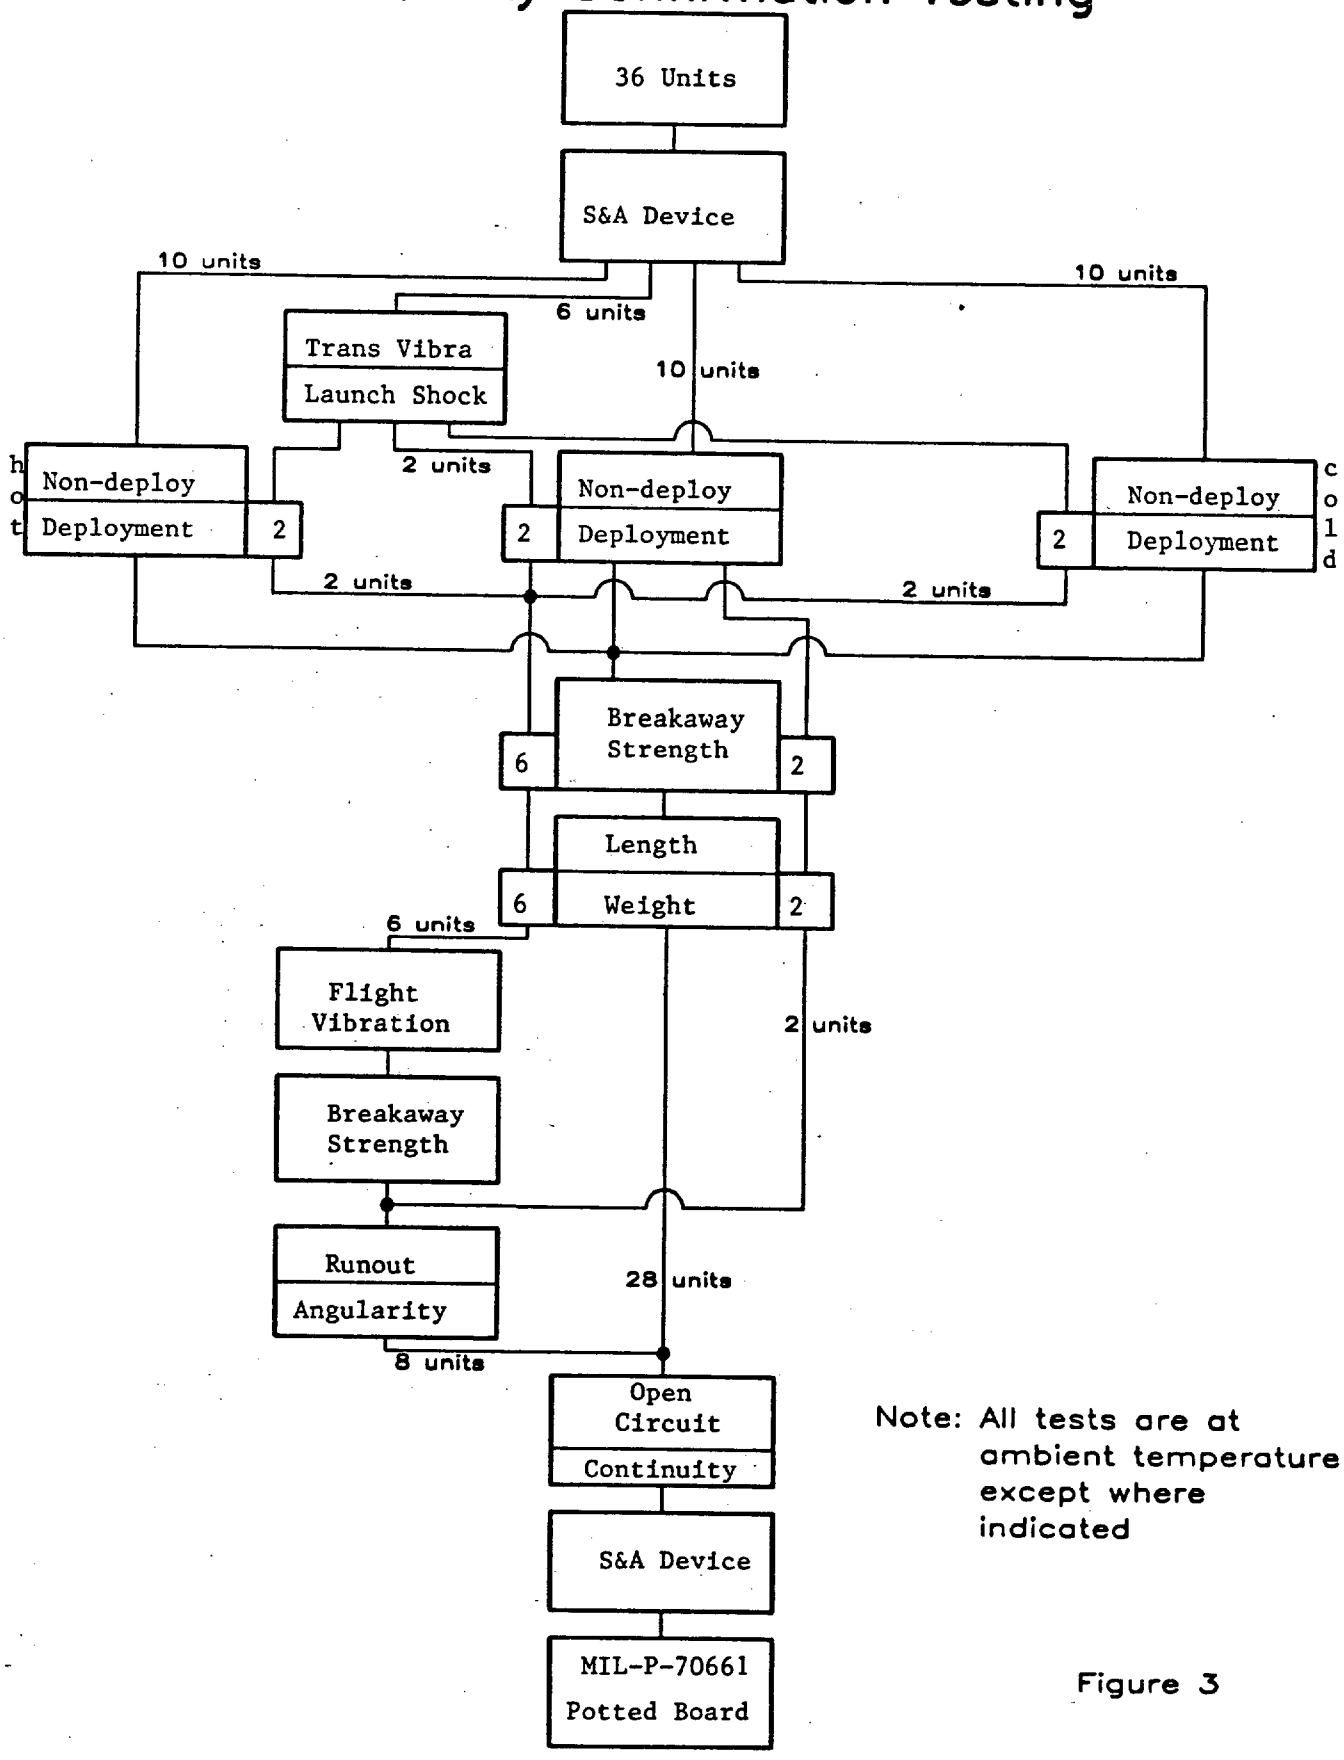

Note: All tests are at ambient temperature except where indicated

Figure 3

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection.

4.5.1 Safety and arming device. (ref. 3.4)

4.5.1.1 First article. The inert S&A shall be visually inspected prior to environmental testing and upon completion of the continuity circuit test to insure that it conforms to 3.4.

4.5.1.2 Quality conformance.

a. The S&A's shall be visually inspected immediately prior to packaging to insure that the rotor is in the safe position (detonator not pointing up) and shorting screw removed (see Figure 2).

b. For lot quality confirmation testing, the inert S&A shall be visually inspected prior to environmental testing and upon completion of the continuity circuit test to insure that it conforms to 3.4.

4.5.2 Storage temperature. Temperature condition stowed probe with an inert S&A and an inert charge assembly for 12 hours minimum at -65°F or +155°F. Visually inspect unit for damage before continuing with the tests listed in Table I. Cold units may be bagged to prevent frosting. (ref. 3.5)


4.5.3 Transportation vibration. The stowed probe with an inert S&A and an inert charge assembly shall be attached to the test equipment. Vibration input, as defined by Table III, shall be imposed in each of the specified axis for 2.0 hours (Figure 4 defines the appropriate axes). Upon completion, visually inspect unit for damage. (ref. 3.6)

TABLE III - Transportation Vibration

Longitudinal Axis		Vertical Axis		Transverse Axis	
Frequency Hz	Random Vibration g2/Hz	Frequency Hz	Random Vibration g2/Hz	Frequency Hz	Random Vibration g2/Hz
17	0.020	18	0.145	20	0.078
17-20	18 db/oct	18-20	18 db/oct	20-75	3 db/oct
20-30	0.030	20-45	0.210	75-120	0.290
30-100	-6 db/oct	45-55	-12 db/oct	120-400	-3 db/oct
100	0.003	55-175	0.100	400	0.085
		175-300	-3 db/oct		
		300	0.055		

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

TOW-2/E6 Probe and S&A Assembly

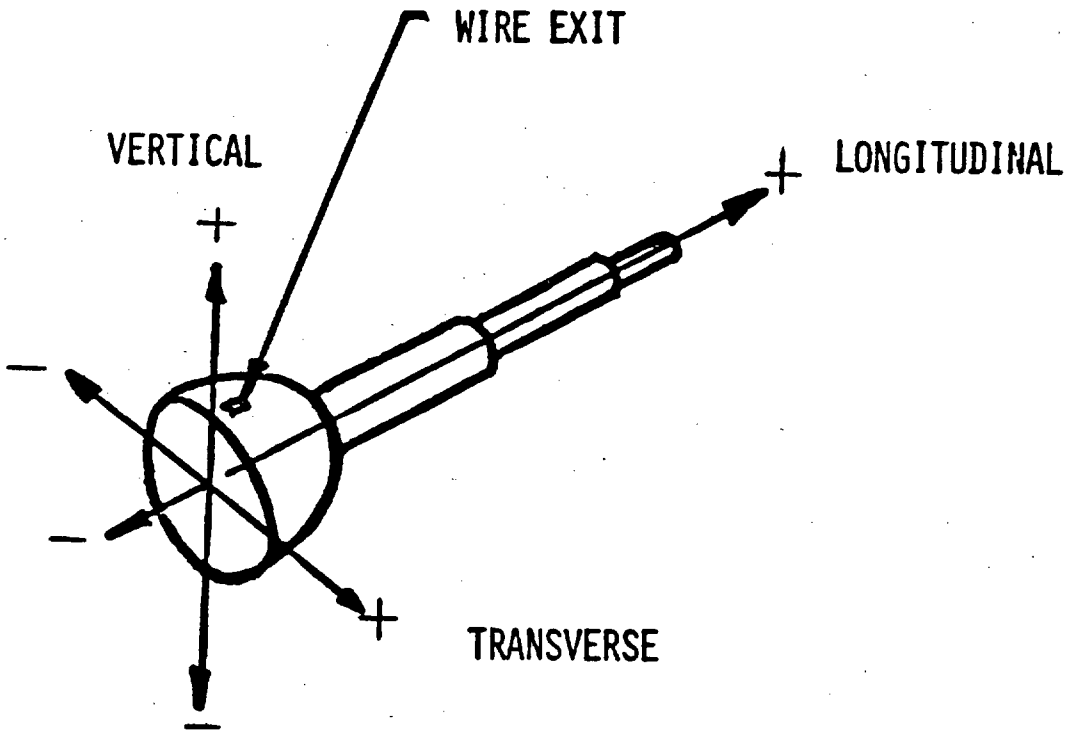

Orientation of Axes

Figure 4

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

4.5.4 Launch shock. Attach a stowed probe with an inert S&A and an inert charge assembly to the test equipment and apply a 400 g ± 10% 1/2 sine wave pulse for 10 ± 3 milliseconds. The axis of impact shall pass through the longitudinal axis of the unit under test with loads imposed in the direction of launch (Figure 4 defines appropriate axis). Upon completion, visually inspect unit for damage. (ref. 3.7)

4.5.5 Operational temperature. Temperature condition stowed probe with an inert S&A and an inert charge assembly for 4 hours minimum at -25°F or +140° F. Visually inspect unit before continuing with tests. Cold units may be bagged to prevent frosting. (ref 3.8)

4.5.6 Non-deployment. The flat of the bore rider button shall be released to a point 0.25 inch from the surface of the ogive and the probe shall not deploy. (ref. 3.9)

4.5.6.1 First article. The stowed probe with an inert S&A and an inert charge assembly shall be temperature conditioned prior to this test as required in 4.5.5 and tested within 2 minutes of removal from the conditioning chamber.

4.5.6.2 Quality conformance.

a. The probe, less the mechanism assembly (dwg. 9388005) shall be tested at ambient temperature.

b. For lot quality confirmation testing, the stowed probe with an inert S&A and an inert charge assembly shall be temperature conditioned prior to this test as required in 4.5.5 and tested within 2 minutes of removal from the conditioning chamber.

4.5.7 Deployment. Immediately after completion of the test procedure in 4.5.6, the bore rider shall be released thereby causing the probe to deploy to its minimum length in the required time. Visually inspect unit for damage. (ref. 3.10)


4.5.7.1 Quality conformance. The probe less the S&A mechanism assembly (dwg. 9388005) shall be tested at ambient temperature.

4.5.8 Breakaway strength. Apply a 20 lbs. load longitudinally to the inner tube in the aft direction. The unit shall remain in the deployed and locked position. (ref 3.11).

4.5.9 Length. The probe length shall be measured in the deployed position from the base of the frame to the tip of the probe after release of the bore rider in accordance with 4.5.7. (ref. 3.12)

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

TOW-2/E6 Probe and S&A Assembly

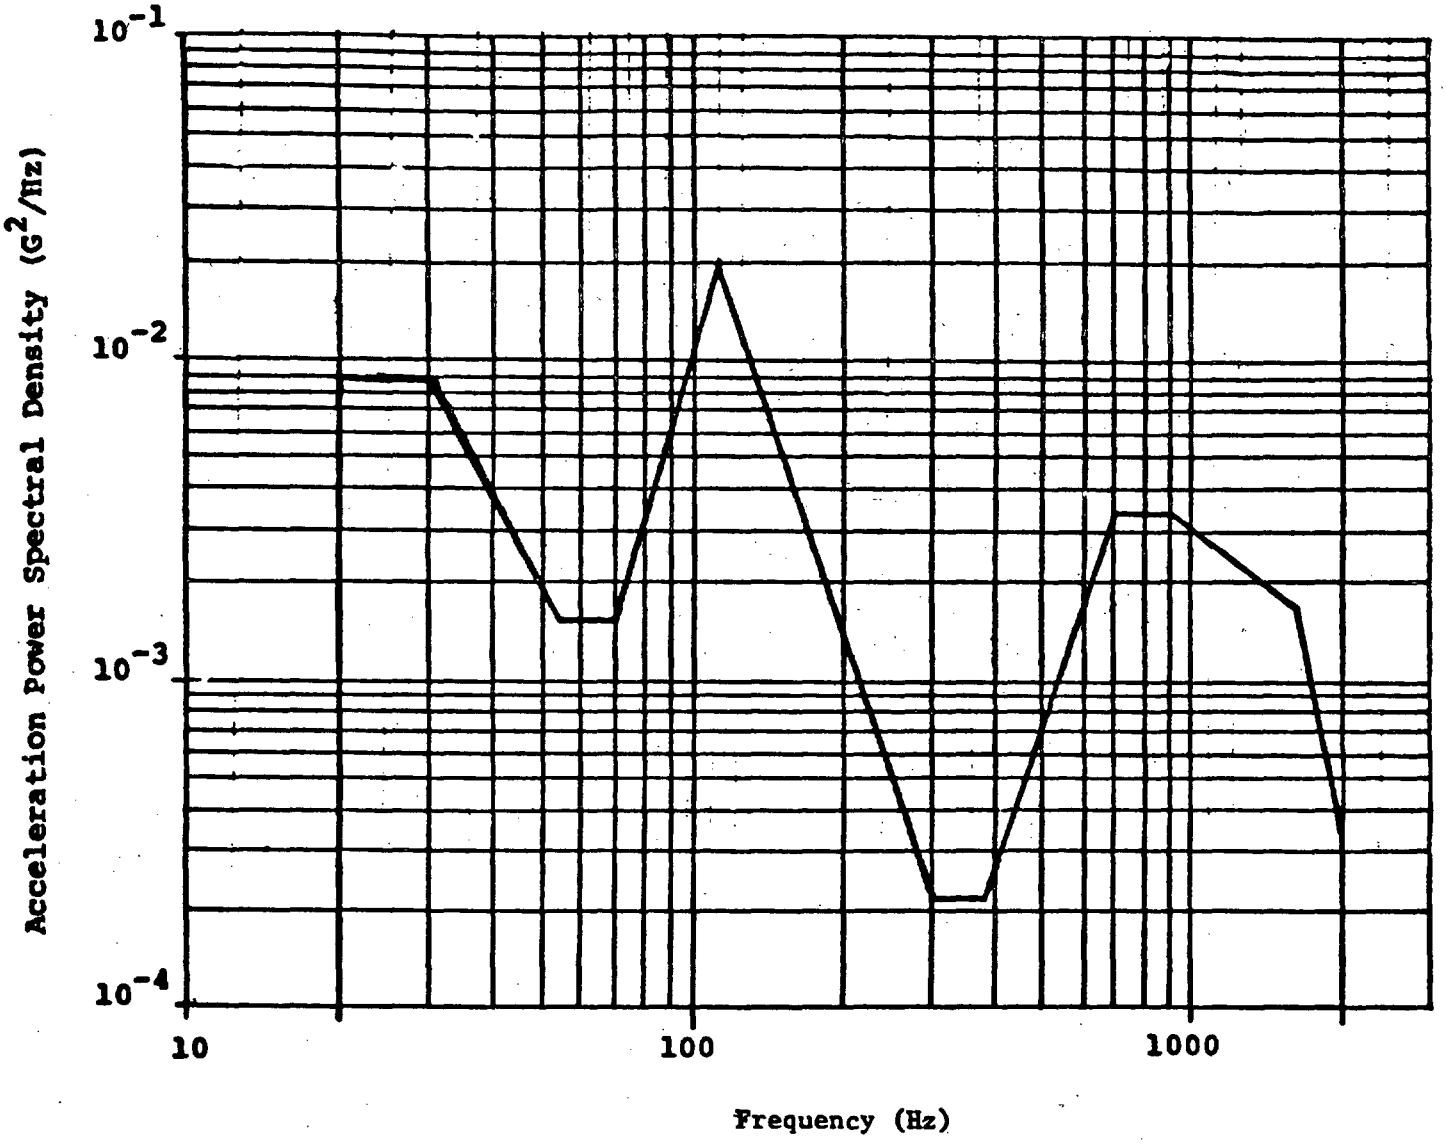


Level: 2.080 G RMS.
Test Duration: 4 Sec at 2X RMS Level, followed by 20 Sec at Level.

Transverse Axis Flight Vibration

Figure 5A

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T03:57Z
Check the source to verify that this is the current version before use.

TOW-2/E6 Probe and S&A Assembly

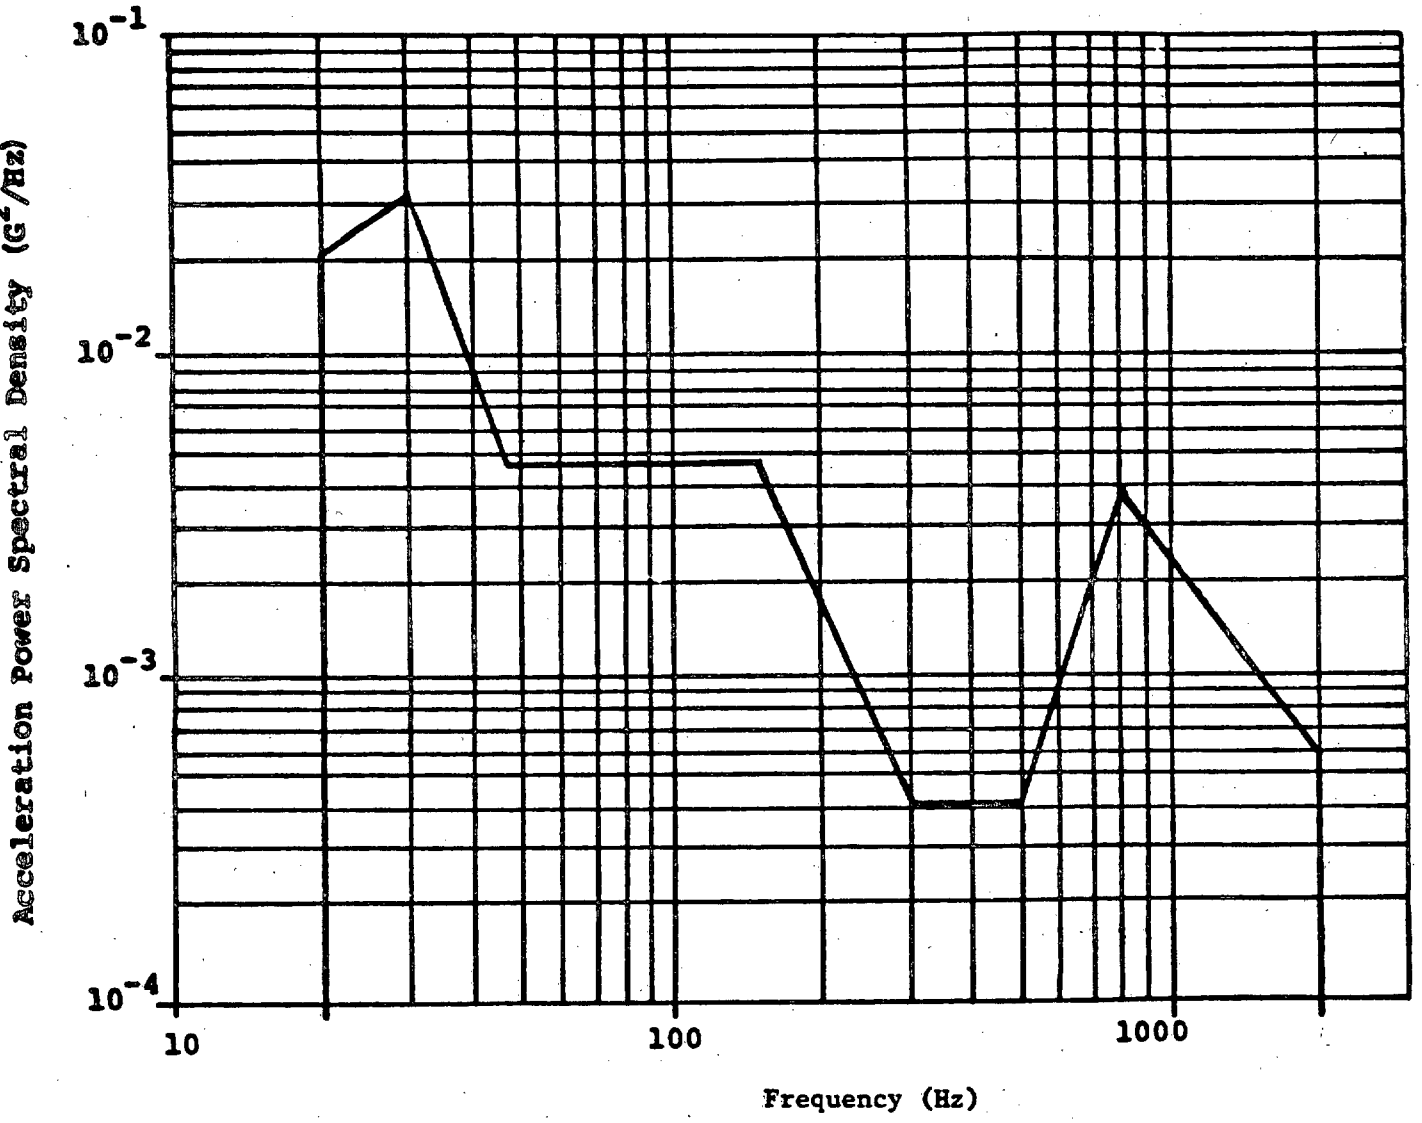


Level: 1.900 G RMS
Test Duration: 4 seconds at 2X RMS Level, followed by 20 Sec at Level

Verticle Axis Flight Vibration

Figure 5B

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:57Z
Check the source to verify that this is the current version before use.

TOW-2/E6 Probe and S&A Assembly

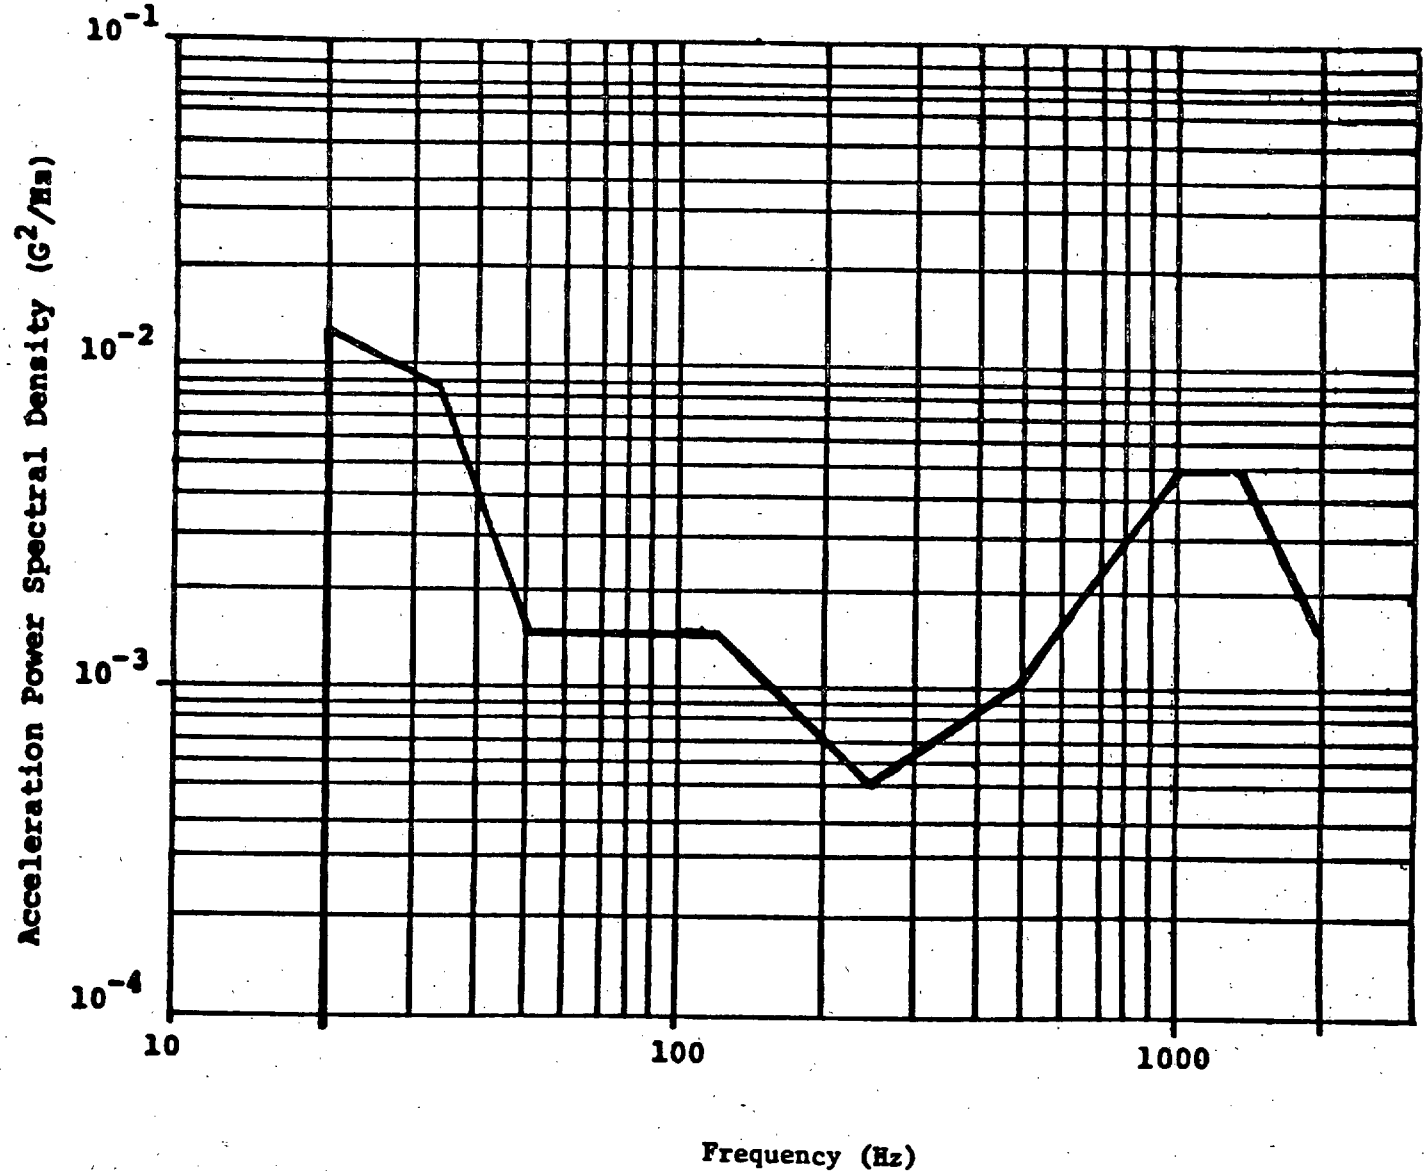

Level: 2.340 G RMS.
Test Duration: 4 seconds at 3X RMS Level, followed by 20 seconds at Level.

Longitudinal Axis Flight Vibration

Figure 5C

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

4.5.10 Weight. (Ref. 3.13)

4.5.10.1 First article. Weigh the deployed probe with an inert mechanism assembly (dwg. 9388005) weighing a minimum of 39.0 gms and an inert charge assembly (dwg. 9399673) weighing 126.5 ± 1.0 gms.

4.5.10.2 Quality conformance.

a. Weigh the stowed probe with a live S&A but no charge assembly.

b. For lot quality confirmation testing, weigh the deployed probe with an inert mechanism assembly (dwg. 9388005) weighing a minimum of 39.0 gms and an inert charge assembly (dwg. 9399673) weighing 126.5 ± 1.0 gms.


4.5.11 Flight vibration. Attach a deployed probe with an inert S&A and an inert charge assembly to the test equipment and apply vibration sequentially along each of three orthogonal axes. The acceleration power spectral density for each axis as measured on the the probe/fixture interface shall be in accordance with Figures 5A, 5B, and 5C (Figure 4 defines the appropriate axis). Upon completion, visually inspect unit for damage. (ref. 3.14).

4.5.12 Runout. Measure the circular runout of the outer tube of an extended probe with an inert S&A and an inert charge assembly within 0.25 inch from the top of the frame. The base of the frame is considered as the primary datum and the outside diameter of the base of the frame is considered as the secondary datum. (ref. 3.15)

4.5.13 Angular alignment. Apply load to the deployed probe with an inert S&A and an inert charge assembly to the section as defined in Figure 6. The warhead centerline is considered to run perpendicular to the base of the probe. The line tangent to the point 2.5 inches aft of the probe tip shall be determined by two points on the outside of the inner tube equidistant from the point. The angle can be determined from this line and a line in the same plane running parallel to the warhead centerline. The load shall be applied perpendicularly to the warhead centerline in the following order: 0°, 180°, 90°, 270°. (ref. 3.16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

TOW-2/E6 Probe and S&A Assembly

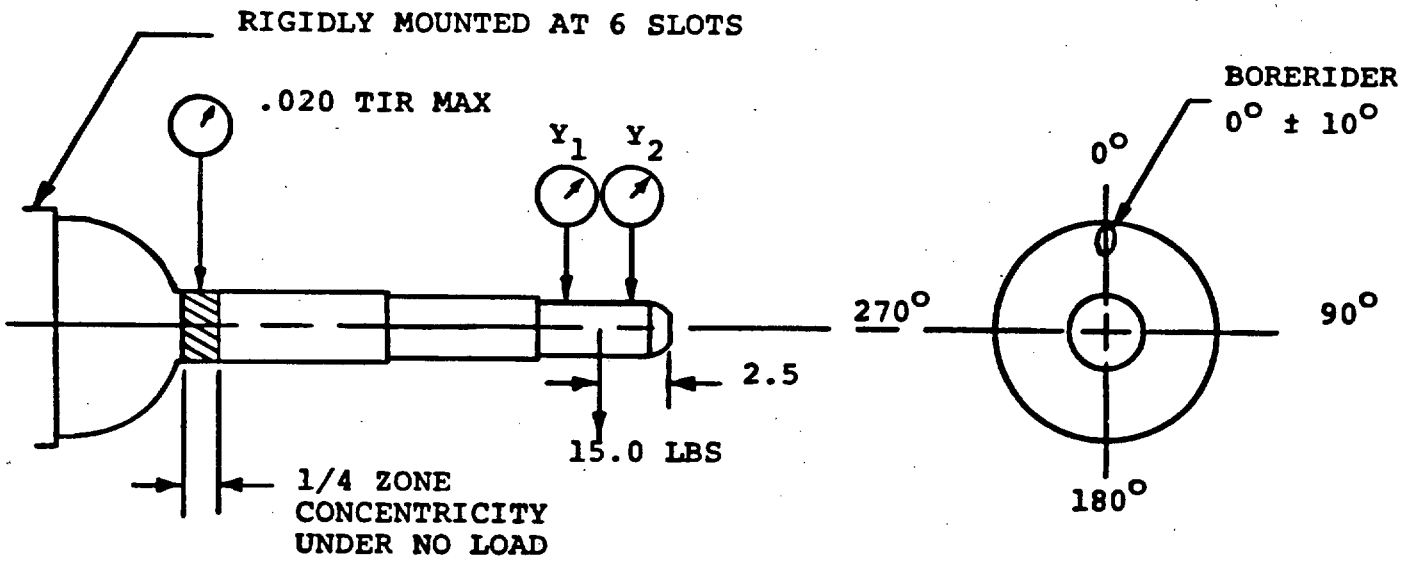

Angular Alignment: Test Load Set-Up

Figure 6

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:57Z
Check the source to verify that this is the current version before use.

4.5.14 Open circuit tests. For the tests listed in Table IV, the measurement shall be taken with a dc voltage or current test instrument implementing the specified polarity. Due to the capacitive nature of the circuit, steady state shall be achieved before performing actual measurements. (ref. 3.17)

4.5.14.1 First article. The probe with an inert S&A and an inert charge assembly shall be tested in the deployed position.

4.5.14.2 Quality conformance.

a. The probe with the inert charge assembly shall be inspected in the stowed position. WARNING: Tests with live S&A's may be dangerous and should be performed behind a suitable barricade.

b. For lot quality conformation testing, the probe with an inert S&A and an inert charge assembly shall be tested in the deployed position.

TABLE IV - Open circuit tests

TEST	Resistance ≥ 1.0 megohm FROM (+)	TO (-)
1. Detonator switch	inner tip	red cable
2. Tip switch	black cable	inner tip
3. Ogive switch	base contact	ogive (or rivet)

4.5.15 Continuity circuit tests. Test in accordance with Table V. (ref. 3.18)

4.5.15.1 First article. The probe with an inert S&A and an inert charge assembly shall perform tests 1 thru 4 in the deployed position and tests 5 thru 7 in the stowed position.

4.5.15.2 Quality conformance.

a. The probe with an inert charge assembly shall be inspected in the stowed position. The test current shall not exceed 40 microamperes. WARNING: Tests with live S&A's may be dangerous and should be performed behind a suitable barricade.

b. For lot quality confirmation testing, the probe with an inert S&A and an inert charge assembly shall perform tests 1 thru 4 in the deployed position and tests 5 thru 7 in the stowed position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

TABLE V - Continuity Tests

TEST	Resistance ≤ 0.5 ohms From	To
1. Tip ground circuit	outer tip	black cable
2. Ogive switch ground circuit	ogive (or rivet)	black cable
3. Base S&A actuator circuit	w/yellow cable	yellow cable
4. Ogive switch live circuit	base contact	E 10
5. Inner tip circuit	inner tip	T-lug (S&A)
6. Tip detonator firing circuit	pin (S&A)	red cable
7. Tip actuator firing circuit	white wire (S&A)	w/black cable

w - white
T-lug - terminal lug (dwg. 9388028)
pin - electrical contact stud (dwg. 9231433)

4.5.16 Potted circuit card assembly. Upon completion of continuity circuit tests for first article and lot quality confirmation testing, remove the potted circuit card assembly (dwg. 9399722) from the TOW-2/E6 Probe and S&A Assembly (dwg. 9387131). Inspect the potting material for deterioration/cracks and test the timing delay, tip firing energy and the base firing energy.

5. PACKAGING

5.1 Preservation and packaging. Preservation and packaging shall be such as to prevent deterioration or damage during handling and shipment to the first destination.

5.1.1 Shipping. The probe shall be shipped the stowed condition and in accordance with notes 16 and 17 of dwg. 9387141.

5.2 Packing. Packing shall be in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification rules or regulations of other carriers applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:57Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. It is intended that the probe defined by this specification shall be used on the M207E5 and M207E6 warheads for use in the TOW Guided Missile.

6.2 Ordering data. See 6.1 of MIL-A-48078.

6.3 Submission of designs for approval. See 6.2.3 of MIL-A-48078. Submit equipment designs, as required to Commander, ARDEC, ATTN: AMSMC-QAT-I(D), Picatinny Arsenal, New Jersey 07806-5000. The letter of submittal shall state contractor, contract number, specification number, item nomenclature and classification of defects or test paragraph.

6.4 Data requirements. Deliverable data required by the specification is cited in the following paragraphs:

Paragraph	Date Requirement	Applicable DID
3.21	Quality Inspection Test, Demonstration and Evaluation Report	DI-R-1724
4.4.2.60	Quality Inspection Defect Report	DI-R-1721

The above data items shall be delivered to the following: Commander, ARDEC, ATTN: AMSMC-QAT-B (D), Picatinny Arsenal, New Jersey 07806-5000

6.5 Drawings. Drawings listed in 2.1.2 of this specification under the heading US Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as ARDC, ARRADCOM, Picatinny Arsenal or Rock Island drawings. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.6 Subject term (key word) listing
TOW 2/E6 Probe and S&A Assembly
Potted Circuit Card Assembly
M114 Safety and Arming Device (S&A)
Control drawing
Data Item Description (DID)
Lot quality confirmation testing
Mechanism assembly
Charge assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

6.7 Contractor. Unless otherwise specified, the word "Contractor", as used throughout this specification, shall mean any supplier or producer of items or material to the Government. This shall include commercial, sub-contractors, Government-Owned, Contractor-Operated (GOCO) and Government-Owned, Government-Operated (GOGO) plants.

Custodian
Army-AR

Preparing activity
Army-AR

(Project 1336-A542)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-48689 (AR)	PROBE AND S&A ASSEMBLY, TOW-2/E6

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:57Z
Check the source to verify that this is the current version before use.