MILITARY SPECIFICATION

PUBLIC ADDRESS SET AN/UIH-6( ) (UNITS OF)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the following units of a transistorized, lightweight public address set designated Public Address Set AN/UIH-6( ): (See 6.1)

Amplifier, Audio Frequency AM-4254( )/UIH-6

Control, Amplifier C-7779( )/UIH-6

Loudspeaker Assembly LS-517( )/UIH-6

Parts Kit, Amplifier Mounting MK-1140( )/UIH-6

Parts Kit, Loudspeaker Mounting MK-1138( )/UIH-6

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-20	Bags, Cotton, Mailing
PPP-B-585	Boxes, Wood, Wirebound
PPP-B-601	Box, Wood, Cleated-Plywood
PPP-B-621	Box, Wood, Nailed and Lock-Corner

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Cont'd)

FEDERAL

PPP-B-636	Box, Fiberboard
PPP-F-320	Fiberboard, Corrugated and Solid, Sheet Rock (Container Grade) and Cut Shapes
PPP-P-291	Paperboard, Wrapping, Cushioning
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain for Sealing and Securing
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant, (for Carton Sealing)
QQ-S-781	Steel Strapping, Flat
T-T-871	Twine, Cotton, Wrapping

MILITARY

MIL-P-116	Preservation, Methods of
MIL-S-901	Shockproof Equipment, Class HI (High Impact), Shipload
MIL-P-11268	Parts, Materials and Processes Used in Electronic Communication Equipment
MIL-M-13231	Marking of Electronic Items
MIL-F-14072	Finishes for Ground Signal Equipment
MIL-B-43014	Boxes, Water Resistant Paperboard, Folding, Set-Up and Metal-Stayed

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Table for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

STANDARDS (Cont'd)

MILITARY

MIL-STD-252	Wired Equipment, Classification of Visual and Mechanical Defects
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-461	Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-781	Reliability Test: Exponential Distribution
MIL-STD-810	Environmental Test Methods

DRAWINGS

ELECTRONICS COMMAND

DL-SM-B-660782	Amplifier, Audio Frequency AM-4254( )/UIH-6
DL-SM-A-661030	Control, Amplifier C-7779( )/UIH-6
DL-SM-A-661028	Loudspeaker Assembly LS-517( )/UIH-6
DL-SM-A-661032	Parts Kit, Amplifier Mounting MK-1140( )/UIH-6
DL-SM-A-661029	Parts Kit, Loudspeaker Mounting MK-1138( )/UIH-6
DL-SM-A-661031	Tripod, Loudspeaker MT-4040( )/UIH-6
ES-D-202410	Type 1 Standard Battery Container Interface Control Drawing

(Copies of specifications, standards, drawings and publication required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First Article. - When specified in the contract or purchase order, the contractor shall furnish first article units in accordance with 4.3.

3.2 Construction. - The equipment shall be constructed in accordance with the requirements of this specification and the following drawings (including the requirements for parts, materials, and processes thereon):

DL-SM-B-660782	Amplifier, Audio Frequency AM-4254( )/UIH-6
DL-SM-A-661030	Control, Amplifier C-7779( )/UIH-6
DL-SM-A-661028	Loudspeaker Assembly LS-517( )/UIH-6
DL-SM-A-661032	Parts Kit, Amplifier Mounting MK-1140( )/UIH-6
DL-SM-A-661029	Parts Kit, Loudspeaker Mounting MK-1138( )/UIH-6
DL-SM-A-661031	Tripod, Loudspeaker MT-4040( )/UIH-6

3.3 Battery Interface. - The equipment shall interface with the battery as shown in Drawing ES-D-202410. In addition, and when specified in the contract or purchase order, the Government shall furnish Battery, Storage BB-651/UIH-6 for use in testing. (See 4.4)

3.4 Parts, materials, and processes; general (See 4.4). - In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein, shall apply.

3.5 Interchangeability (See 4.7). - Like units, assemblies, subassemblies and replaceable parts shall conform to requirement 7 of MIL-STD-454.

3.6 Workmanship (See 4.5.2). - The equipment shall be manufactured and assembled in accordance with the applicable portions of Specification MIL-P-11268 and requirement 9 of MIL-STD-454.

3.7 Finish. - The equipment shall be finished in accordance with MIL-F-14072 and the equipment drawings. (See 4.4)

3.8 Marking. - (See 4.4):

3.8.1 General. - Marking shall conform to MIL-M-13231. Front panel marking shall be group I as described in that specification.

3.8.2 Serial numbers. - The following items shall have serial numbers: Amplifier, AF AM-4254( )/UIH-6, Control, Amplifier C-7779( )/UIH-6 and Loudspeaker Assembly LS-517( )/UIH-6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.8.3 Visibility. - Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.9 Amplifier, Audio Frequency AM-4254( )/UIH-6 performance (See 4.8). - The amplifiers shall meet the following performance requirements.

3.9.1 Power gain. - The power gain of the amplifier at 1000 Hz shall be at least 105 db for the 150 ohm input circuit at 120 watts power output and 24 VDC power source when operated in the configuration shown in Figure 1 with the microphone GAIN control fully CW and a 1 KHz source applied to give a reading on M-1 of 14.5 volts (120 watts). In the Figure 1 configuration, the reading of M-2 applied to the formula

$$dB = 48.5 + 20 \log (1/M\text{-}2)$$

shall result in a gain of 105 dB or more.

3.9.2 Power output. - The power output of the amplifier with a 24 volt DC power source shall be 250 watts when operated in the configuration shown in Figure 1 with a 1 KHz source applied to give maximum reading on M-1. In the Figure 1 configuration, a reading of 21 or more volts on M-1 is equivalent to a power output of 250 watts or more. At a power output of 250 watts, the decibel meter of the amplifier shall read zero $\pm$ 1 dB.

3.9.3 Harmonic distortion. - The harmonic distortion of the amplifier at the frequencies and power output settings indicated below shall not exceed 6% when the equipment is operated in the configuration of Figure 2 and the MIKE GAIN control is set to satisfy the following condition:

Frequencies (Hz)	Power output settings as volts on Meter M-1
500	4.2 and 14.5
1000	4.2 and 14.5
2000	4.2 and 14.5
5000	4.2 and 14.5

MIKE GAIN control setting: MIKE GAIN control set to provide an output signal of 16.2 volts on M-1 with an input signal of 3 millivolts, 1 KHz at M-2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

speaker assembly operating ... of between 2.40 volts and 4.80 volts with the output

3.9.4 Noise level. - The signal-to-noise ratio of the amplifier at rated sine wave output of 120 watts shall be 60 dB or more at maximum gain settings and 24 VDC power source when operated in the configuration shown in Figure 3 with microphone GAIN control fully CW. In the Figure 3 configuration the reading on M-1 applied to the formula

$$\text{S/N Ratio (dB)} = 23.2 + 20 \log (1/\text{M-1})$$

shall result in a signal noise ratio of 60 dB or more.

3.9.5 Frequency response. - A plot of the frequency response at the frequency points indicated below shall be within the upper and lower envelope limits of Figure 5 when the equipment is operated under the following conditions of amplifier operation:

a. The equipment powered and operated in the configuration of Figure 4.

b. The MIKE GAIN control adjusted and maintained as in paragraph 3.9.3 and input reading at M-2 maintained a 3 millivolts.

c. Indicated frequency points:

125 Hz	500 Hz	1 kHz	2 kHz	10 kHz
250 Hz	800 Hz	1.25 kHz	5 kHz	20 kHz

3.9.6 Overload protection circuit. - The overload protection circuit of the amplifier shall operate as follows:

a. Requirement for impedance protection. - With the amplifier operated in the configuration of Figure 6 and the signal generator adjusted for an output of 1 volt at 1000 Hz, the amplifier protective circuit is operating satisfactorily when the following conditions are satisfied:

VAR R (ohms)	Output meter	Overload lamp	Power lamp
1.4	Defelcts	Off	On
0.8	No deflection	On	Off

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

3.9.6 Overload protection circuit (Cont'd)

b. Requirement for voltage protection. - With the amplifier operated in the configuration of Figure 7, the overload lamp (red) shall not come on when the amplifier is operated with any input voltage under 32 volts and shall come on with any input voltage between 35 and 55 volts.

3.9.7 Power. - The system shall operate satisfactorily when utilizing dc power sources as follows:

a. Rated power. - When delivering 250 watts power output, the total power consumption of the amplifier shall not exceed 300 watts when operated in the configuration of Figure 8 with the supply voltage set at 24 volts and a 1 kHz source applied to give a reading of 21 volts on M-1. In the Figure 8 configuration, the computed product (m-2 x M-3) shall result in a power consumption of 300 watts or less.

b. No signal. - Standby power consumption (no-signal conditions) of the amplifier shall not exceed 25 watts when operated in the configuration of Figure 8 with the supply voltage set at 32 volts and no signal applied. In the Figure 8 configuration, the computed product (M-2 x M-3) shall result in a power consumption of 25 watts or less.

3.9.8 Transient over-voltage protection. - Automatic shut-off of the amplifier shall result with the amplifier operated in the configuration of Figure 9 when a voltage transient of 100 volts dc is applied for a period of at least 150 milliseconds at the rate of one pulse per minute for a total of ten (10) pulses.

3.10 Parts Kit, Amplifier Mounting, MK-1140( )/UIH-6 Performance(See 4.9).- The output level meters of the amplifiers shall deflect to 0 dB or above and the overload lamps shall not light when the equipment is operated in the configuration of Figure 10 with power applied alternately to Power Input #1 and #2 with the MIKE GAIN set to maximum CW and the microphone energized by talking loudly into the microphone.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.11 Loudspeaker Assembly, LS-517( )/UIH-6 (see 4.10).- The loudspeaker assembly shall meet the following performance characteristics.

CAUTION: During tests using the loudspeaker assembly, test personnel and other persons in the vicinity of the test area should take adequate precautions against the high sound level which can be injurious.

3.11.1 Loudspeaker assembly performance.

3.11.1.1. Sound pressure output.- The loudspeaker assembly shall have an average on-axis sound pressure output of not less than 115 dB, referenced at 0.0002 dynes per sq. cm. and a total harmonic distortion not in excess of 10% at the indicated frequency points when the equipment is operated under the following conditions:

a. The equipment operated in the configuration of Figure 11.

b. Indicated frequency points: 50 Hz increments over a frequency range of 800-1250 Hz.

c. Signal power 120 watts maximum.

3.11.1.2 Frequency response.- A plot of the on-axis frequency response of the loudspeaker assembly, at the indicated frequency points, shall be within the upper and lower envelope limits of Figure 12 when the equipment is operated under the following conditions:

a. The equipment operated in the configuration of Figure 11.

b. Indicated frequency points: 200, 300, 500, 700, 1000, 1500, 2000, 3000, 5000 and 8000 Hz.

c. Signal power 120 watts minimum.

3.11.1.3 Directivity.- The loudspeaker assembly shall have an average 30° off-axis sound pressure output of not less than 109 dB, referenced at 0.0002 dynes per sq. cm., at the indicated frequency points when the equipment is operated under the following conditions:

a. The equipment operated in the configuration of Figure 11.

b. Indicated frequency points: 50 Hz increments over a frequency range of 800-1250 Hz.

c. Signal power 120 watts maximum.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3.11.1.4 Linearity. - The on-axis sound pressure output of the loudspeaker assembly at 250 watts shall be at least 1.5 dB above the 120 watt level when the equipment is operated under the following conditions:

a. The equipment operated in the configuration of Figure 11.

b. Indicated frequency points: 50 Hz increments over a frequency range of 800-1250 Hz.

3.11.2 Impedance. - With the loudspeaker assembly switch in the "Normal" position, a signal of 1 volt (M-1) at 1 kHz shall produce a reading of M-2 of between 0.40 volts and 0.60 volts with the loudspeaker assembly operating in the configuration shown in Figure 13.

3.11.3 Endurance requirement. - The loudspeaker assembly shall meet the performance requirements of 3.11.1 after being operated in the configuration of Figure 14 for 5 hours at an amplifier power output averaging 250 watts with 28 VDC input and signal having a logarithmic sweep over the frequency range of 800-1250 Hz at the rate of 1 to 5 sweeps per second.

3.12 Control, Amplifier C-7779( )/UIH-6 operation (see 4.11). - The control, shall meet the following operational performance requirements.

3.12.1 Meter and lamp operation. - The output meter amplifier 1 and 2 on the control shall indicate zero ± 1 dB when the equipment is operated in the configuration of Figure 15 with selector switch in position 2 and 3, respectively, with R1 and R2 set to provide a reading of 0.7 mA on M-1. With the selector switch at the positions below, the control shall exhibit the following conditions of operation:

		Control			
Selector Switch Position	ON/OFF Switch	Power Lamp (Green)		Overload Lamp (Red)	
		Amp 1	Amp 2	Amp 1	Amp 2
5	Off	On			
6	On	Off		On	
6	Off			Off	
7				On	
7	On			On	
8				Off	
9					On
9	Off				Off
10					On

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3.12.2 Paralleling output.- When the control is operated in the configuration shown in Figure 16, the meter M-1 shall be 1 millivolt AC minimum with the power switch on, a 1 kHz source applied at 1.0 millivolt, the decade resistor across pins "D" and "E" of the MON/PAR connector set to 150 ohms, and the microphone gain control to the maximum CW position.

3.12.3 Monitoring output.- When the control is operated in the configuration shown in Figure 16, the reading on the meter M-1 shall be 1 volt AC minimum with the decade resistor set to 20 K ohms across pins "A" and "B" of the MON/PAR connector.

3.12.4 Gain.-

a. When the control is operated in the configuration shown in Figure 17, the meter M-1 shall be 1 volt AC minimum with a 1 kHz source applied at 1.0 volt to the "BRG" input, a load resistor at 500 ohms across pins "F" and "H" of "Amplifier 1" connector, the power supply across pins "A" (+) and "B" (-), and the bridging gain control to the maximum CW position.

b. The meter M-1 shall be 1 volt AC minimum with the microphone gain control set to maximum CW position, a 1 kHz source applied at 1.0 millivolt to pins "A" and "D" of the "MIKE INPUT" connector, a load resistor of 500 ohms across pins "F" and "H" of "Amplifier #2" connector, and the power supply applied across pins "A" (+) and "B" (-) of "Amplifier #2" connector.

3.12.5 Noise.- When the control is operated in the configuration shown in Figure 17, the noise level observed at meter M-1 shall be less than ten (10) millivolts with the signal generator removed and a 150 ohm load applied to the microphone input.

3.12.6 Harmonic distortion.- The total harmonic distortion (THD) of the control shall not exceed 5% at the indicated frequency points under the following conditions of control operation:

a. The equipment powered and operated in the configuration of Figure 18.

b. 500 Hz source applied to give a reading on M-1 of 3.0 millivolts.

c. The MIKE GAIN control maintained and adjusted for a reading of 1.0 volt at M-2.

d. Indicated frequency points: 500, 1000, 2500 and 5000 Hz.

3.13 System requirements (see 4.12). -The Amplifier, Audio Frequency AM-4254( )/UIH-6, Control, Amplifier C-7779( )/UIH-6 and Loudspeaker Assembly, LS-517( )/UIH-6 shall meet the following operational system requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3.13.1 Operational.-

a. With the equipment operated in the configuration of Figure 19, the following requirements shall be met:

(1) The green "POWER" lights shall be illuminated in the control, and also on the amplifier when the power is applied to the system.

(2) With the power applied, the microphone gain control fully clockwise on the control, and using voice into the microphone, an amplified voice shall be heard on the loudspeaker assembly units and the output meters on the control and amplifiers shall show deflections.

(3) With the power applied, the microphone removed, the bridging gain control in the full clockwise position, and a 1 kHz input signal of 1 volt minimum applied to the "BRG INPUT", the output meters on the amplifier and control, shall indicate 0 dB or more with loudspeaker switch in either the "Low" or "Normal" position.

3.14 Preconditioning (see 4.6).- The following units, Amplifier, Audio Frequency AM-4254( )/UIH-6, Loudspeaker Assembly LS-517( )/UIH-6 and Control, Amplifier C-7779( )/UIH-6 shall meet the requirements herein, without subsequent processing, after subjection to the bounce preconditioning and burn-in as specified below.

3.14.1 Bounce preconditioning.- Each unit shall be placed on the table of the Package Tester, Type 1000-SC, as made by the L.A.B. Corporation, Skaneatales, New York, or equal. The package tester, shafts in phase, shall have a speed such that it is just possible to insert a 1/32-inch-thick strip of material under one corner or edge of the unit to a distance of 3 inches as the unit bounces. The units shall be subjected to this preconditioning for 1 minute. After bounce preconditioning, the units shall not be repaired, alined, cleaned, or otherwise changed prior to subjection of inspection.

3.14.2 Burn-In.- The equipment shall be capable of meeting the requirements herein, without subsequent processing, after subjection to the Burn-In of 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3.15 Service conditons (see 4.13).- The equipment as specified shall meet the following service conditions. The standard conditions of MIL-STD-810 shall apply unless otherwise specified herein. Reference made to amplifier shall refer to Amplifier, Audio Frequency AM-4254( )/UIH-6; control shall refer to Control, Amplifier C-7779( )/UIH-6; loudspeaker assembly shall refer to Loudspeaker Assembly LS-517( )/UIH-6; tripod shall refer to Tripod, Loudspeaker MT-4040( )/UIH-6; and battery unit shall refer to Battery Assembly, Storage BB-651( )/U. Amplifier mount is part of Parts Kit, Amplifier Mounting, MK-1140( )/UIH-6; and loudspeaker mount is part of Parts Kit, Loudspeaker Mounting, Vehicle MK-1138( )/UIH-6.

3.15.1 Temperature-Altitude.- When the units are operated in the configuration of Figure 20 under the conditions of Method 504, Procedure I for Class 1B equipment of MIL-STD-810, the maximum voltage reading on M-1 and M-2 shall not deviate by more than ± 3 dB when compared with pretest conditions with 24 volts ± 1 VDC power applied, a 1 kHz input signal of .5 volt rms applied to the loudspeaker assembly and a voice signal applied by microphone under the following conditions of operation:

a. Operating temperature limits: -40°F to +155°F.

b. Non-operating temperature limits: -65°F to +155±F.

c. Altitude limits: 10,000 feet operating, 40,000 feet non-operating.

3.15.2 Vibration.- The amplifier, amplifier mount, control, loudspeaker assembly and loudspeaker mount shall show no evidence of mechanical failure when operated under the conditions of Method 514.1, Procedure 1, Curve M of Figure 514.1-3 of MIL-STD-810 with a time schedule indicated on Table 514.1-III.

3.15.3 Relative humidity.- When the units are operated in the configuration of Figure 20 under the conditions of Method 507, Procedure III of MIL-STD-810, the maximum voltage reading on M-1 and M-2 shall not deviate by more than ± 3 dB when compared with pretest conditions with 24 volts ± 1 VDC power applied and a 1 kHz input signal of .5 volt rms applied to the loudspeaker assembly.

3.15.4 Explosive atmosphere.- The amplifier, control and loudspeaker assembly shall not cause ignition of an ambient explosive-gaseous mixture with air when the "off-on" power switches on the amplifier and control are repeatedly operated at an altitude limited to 10,000 feet and when operated under the conditions of Method 511, Procedure I of MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3.15.5 Orientation.- When the amplifier, control and loudspeaker assembly are operated in accordance with paragraph 3.13.1 while inclined to an angle of 20 $\pm \frac{3}{7}$ degrees for a minimum of 5 minutes in each plane (forward, backward, left and right), the output level meters on the amplifier and control shall not deviate more than ± 1 dB when compared with pretest conditions.

3.15.6 Bounce.-

3.15.6.1 Bounce, vehicular.- When the amplifier and loudspeaker assembly on their mounts are operated in the configuration of Figure 20 under the conditions of Method 514.1 Procedure IX of MIL-STD-810, the maximum voltage reading on M-1 and M-2 shall not deviate by more than ± 3 dB when compared with pretest conditions with 24 volts ± 1 VDC power applied, a 1 kHz input signal of .5 volt rms applied to the loud-speaker assembly and a voice signal applied by microphone.

3.15.6.2 Bounce, loose cargo.- When the amplifier, control, loudspeaker assembly and tripod are operated in the configuration of Figure 20 under the conditions of Method 514.1, Procedure XI of MIL-STD-810, the maximum voltage reading on M-1 and M-2 shall not deviate by more than ± 3 dB when compared with pretest conditions with 24 volts ± 1 VDC power applied, a 1 kHz input signal of .5 volt rms applied to the loudspeaker assembly and a voice signal applied by microphone.

3.15.7 Shock. -

3.15.7.1 Shock, ballistic.- The amplifier and loudspeaker assembly on their mounts shall withstand a ballistic shock consisting of 6 blows on each unit (one each 1- foot blow and 3-foot blow on the back, side and top of test plate) when operated in the configuration of Figure 20 under the following conditions:

a. "Shock Testing Machine for Light Weight Equipment" shall be in accordance with MIL-S-901.

b. The units shall be secured in their normal operating position to the steel test plate by means of the same fasteners used for vehicular installation of the equipment.

In the Figure 20 configuration, the maximum voltage reading on M-1 and M-2 shall not deviate by more than ± 3 dB when compared with pretest conditions with 24 volts ± 1 VDC power applied, a 1 kHz input signal of .5volt rms applied to the loud-speaker assembly and a voice signal applied by microphone.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.15.8 Bench handling.- When the amplifier, control and loudspeaker assembly are operated in the configuration of Figure 20 under the conditions of Method 516.1, Procedure V of MIL-STD-810, the maximum voltage reading of M-1 and M-2 shall not deviate by more than ±3 dB when compared with pretest conditions with 24 volts ±1 VDC power applied, a 1 kHz input signal of .5 volt rms applied to the loudspeaker assembly and a voice signal applied by microphone.

3.15.9 Immersion.- When the amplifier and control is immersed to a covering depth of 3 feet of fresh water for a period of 2 hours under the conditions of Method 512, Procedure 1 of MIL-STD-810, the unit shall show no evidence of leakage through the case or seals. When the loudspeaker assembly is immersed as above, the voltage reading on M-2 shall not deviate by more than ±3 dB when compared with pretest conditions of paragraph 3.11.2.

3.15.10 Rain.- When the amplifier, control and loudspeaker assembly are operated in accordance with Paragraph 3.13.1 under the conditions of Method 506, Procedure 1 of MIL-STD-810 and as specified below, the output level meters on the amplifier and control shall not deviate by more than ± 1 dB when compared with pretest conditions. During each 30 minute rain period, the wind shall be maintained for 15 minutes, commencing 5 minutes after the start of the period and the units shall be operated during the last 10 minutes of the 30 minute period.

3.15.11 Drop. -

3.15.11.1 When the amplifier-battery unit and the control are operated in the configuration of Figure 20 under conditions of Method 516.1, Procedure 11 of MIL-STD-810, the maximum voltage reading on M-1 shall not deviate by more than ±3dB when compared with pretest conditions with 24 volts ± 1 VDC power applied and a voice signal applied by microphone, and no structural damage shall result. NOTE: Any damage to the battery unit shall be disregarded. The battery unit shall be a dummy battery similar in weight and size to battery unit Model AEM-BAT-651 as provided by Applied Electro Mechanics, Inc. or equal and shall be provided by the contractor.

3.15.11.2 When the loudspeaker assembly on its tripod is pushed over onto a hard packed clay surface as specified below, no structural damage shall result, and the voltage reading on M-2 shall not deviate by more than ± 3dB when compared with pretest conditions of Paragraph 3.11.2. The loudspeaker assembly shall be mounted on its tripod, set 5 feet high and shall be pushed over four times; one each from the back, front, right side and left side.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.15.12 Dust.- When the amplifier, control and loudspeaker assembly on its tripod are operated in accordance with paragraph 3.13.1 under the conditions of Method 510, Procedure I of MIL-STD-810, with wind speeds of 35 knots, the output level meters on the amplifier and control shall not deviate by more than ± 1 dB when compared with pretest conditions.

3.15.13 Salt fog.- The amplifier, control and loudspeaker assembly on its tripod shall withstand corrosion of finishes and metals when subjected to the conditions of Method 509, Procedure I of MIL-STD-810. Such corrosion shall be defined as any visible degradation of the equipment surfaces that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface.

3.15.14 Fungus.- No fungi susceptible materials, treated or otherwise, shall be used except in a hermetically sealed enclosure. Fungus-inert materials shall be in accordance with requirement 4 of MIL-STD-454. The amplifier, control, loudspeaker assembly and tripod shall show no evidence of viable fungus or corrosion when subjected to 28 days of Method 508, MIL-STD-810 under the following conditions: The units shall not be specially cleaned for the fungus test, except for the cleaning it receives during or after production. If it is necessary for the manufacturer after assembly to remove accumulated production and handling contaminants by cleaning prior to packaging and delivery, the units shall not be tested for three days after cleaning to allow for complete evaporation of the cleaning compound. All enclosed or gasketed assemblies shall be opened and the interior sprayed with the specified mixed spore suspension. After 14 and 28 days the control items of Method 508, MIL-STD-810 shall show profuse growth over at least 50% of the area of the control items. After 28 days, based upon visual examination, the equipment assembly shall pass if it shows no more than only sparse microbial growth with restricted tuberal growth development in an area of 1 to 10% or less of the total area and no more than six unrelated minute colonies with mycelial development in areas only in other than critical circuit portions; such as terminal spacing, printed circuit boards, etc.; with sparse growth due to random contamination or traces of unmixed material ingredients. No operational test is required to pass the test. The units shall fail if it shows more than the growth specified above. The procedure shall be repeated if the control items fail to show profuse growth after 14 and 28 days of test.

3.15.15 Air-seal.- When the amplifier is configured as in Figure 21 and a vacuum of one (1) PSI (one PSI less than ambient pressure) is applied to the pressure relief port (equivalent to calibrated marking of 13.9" on the manometer), after a period of one minute, the decrease in vacuum shall not exceed 0.01 PSI (equivalent to calibrated marking of 13.76" on the manometer).

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

3.15.16 Electromagnetic compatibility.- The amplifier, control and loudspeaker assembly shall comply with the following conducted and radiated emission and susceptibility requirements set forth in MIL-STD-461A, Notice 1. Test methods and procedures shall be in accordance with MIL-STD-462, Notice 1.

CE02	RE02(*)
CS01	RS03(*)
CS06	

*Upper frequency limits for RE02 and RS03 shall be 1 GHz.

3.16 Reliability.-

3.16.1 Numerical reliability requirements.- The equipment shall have a mean-time-between failure (MTBF) of 400 hours when operated in accordance with the following:

Temperature.....40 ± 5°C (95°F to 113°F).

Duty Cycle.....Equipment on 7 1/2 hrs., off 1/2 hr.

Environment.....Ground, fixed.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities sutiable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspection set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections.- The inspection requirements specified herein are classified as follows:

a. First Article inspection. (See 4.3). Does not include preparation for delivery.

b. Inspections covered by subsidiary documents (see 4.4).

c. Quality conformance inspections.

(1) Quality conformance inspection of equipment before preparation for delivery (see 4.5).

(2) Quality conformance inspection of preparation for delivery (see 4.15).

4.3 First Article.- unless otherwise specified in the contract or purchase order, the First Article inspection shall be performed by the contractor.

4.3.1 First Article units.- The contractor shall furnish ten (10) First Article units of the equipments on contract, four of which shall be used for reliability testing.

4.3.2 First Article inspection.- The First Article inspection shall consist of inspections specified in Table I, and shall be performed in the order specified therein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

4.3.2 First Article Inspection (contd)

NOTES

a. The inspections 1 through 6 in the order shown, shall be performed on all First Article AN/UIH-6 units before subjecting these units to any other inspection requirements specified in the table.

b. The implementation of inspections covered by 7, 8 and 9 shall be expedited to satisfy contract delivery requirements.

c. The numbers in the unit columns in the table covered by 7, 8 and 9 specify the order of inspections for the indicated units.

d. The equipments shall be thoroughly washed, cleaned, dried and refurbished after the Salt Fog and Fungus tests before proceeding with subsequent inspections.

e. In the inspection column under Service Conditions, the specified abbreviations shown in bowlegs ( ) are defined as follows:

A = Amplifier, A.F. AM-4254( )/UIH-6.

C = Control, Amplifier C-7779( )/UIH-6.

L = Loudspeaker Assy. LS-517( )/UIH-6.

T = Tripod, Loudspeaker MT-4040( )/UIH-6.

M(A) = Amplifier Mount (Amplifier Rack Assy, p/o Parts Kit, Amplifier Mounting MK-1140/UIH-6.

M(L) = Loudspeaker Mount (Vehicle Bracket Assy, p/o Parts Kit, Loudspeaker Mounting, Vehicle MK-1138/UIH-6.

L/T = Loudspeaker Assy LS-517( )/UIH-6 mounted on Tripod, Loudspeaker MT-4040( )/UIH-6.

A/M(A) = Amplifier AM-4254( )/UIH-6 mounted on the Amplifier Mount.

A/M(L) = Amplifer AM-4245( )/UIH-6 mounted on the Loudspeaker Mount.

A/Battery = Battery unit assembled to Amplifier AM-4254( )/UIH-6.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

4.3.2 First Article Inspection (contd)

TABLE I FIRST ARTICLE INSPECTION

INSPECTIONS	Req. Para.	Insp. Para	Unit 1	Unit 2	Unit 3	Unit 4	Unit 5	Unit 6	Units 7 thru 10
1. Inspections covered by subsidiary documents	4.4	4.4	Inspections to be performed on all units						
2. Bounce pre-conditioning	3.14.1	4.6.1	Inspections to be performed on all units						
3. Electrical pre-conditioning	3.14.2	4.6.2	Inspections to be performed on all units						
4. Group A inspection	(See Table II)		Inspections to be performed on all units						
5. Group B inspection	(See Table III)		Inspections to be performed on all units						
6. Group C inspection (Electrical)	(See Table IV)		Inspections to be performed on all units						
7. Electromagnetic Compatibility (A,C,L)	3.15.16	4.13	1						
8. Service Conditions Non-damaging									
Temp. Alt. (A,C,L)	3.15.1	4.13			2				
Explosive Atm. (A,C,L)	3.15.4	4.13				3			
Orientation (A,C,L)	3.15.5	4.13			1				
Bench Handling (A,C,L)	3.15.8	4.13		4					
Immersion (A,C,L)	3.15.9	4.13		6					
Rain (A,C,L)	3.15.10	4.13				4			
Dust (A,C,L/T)	3.15.12	4.13			3				
Potentially damaging									
Vibration (A,C,L,M(A), M(L)).	3.15.2	4.13		5					
Humidity (A,C,L)	3.15.3	4.13						1	
Bounce, Vehic. (A/M(A), L/M(L)).	3.15.6.1	4.13		2					
Bounce, Loose Cargo (A,C,L,T)	3.15.6.2	4.13		1					
Shock, ballistic (A/M(A), L/M(L)).	3.15.7.1	4.13		3					
Drop (C,A/Battery)	3.15.11.1	4.13				1			
Drop (L/T)	3.15.11.2	4.13				2			
Salt Fog (A,C,L/T)	3.15.13	4.13			4				
Fungus	3.15.14	4.13					1		
9. Group D Reliability qualification test	3.16	4.14							1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.3.3 First Article data. - The First Article test plan and test report shall be as required in the contract or purchase order.

4.4 Inspections covered by subsidiary documents. - The following shall be inspected under the applicable subsidiary documents as part of the inspection requirement specified in the contract or purchase order.

Item	Where Required
Construction	3.2
Battery interface	3.3
Parts, Materials & Processes (General)	3.4
Finish	3.7
Marking	3.8

4.5 Quality conformance inspection of equipment before preparation for delivery. - The contractor shall perform the inspections specified in 4.4, 4.6 and 4.5.1 through 4.5.7. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements.

4.5.1 Group A inspection. - Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in Table II. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels and AQL's indicated in Table II.

4.5.1.1 Order of inspection within Group A. - Group A inspection shall be performed in an order satisfactory to the government.

TABLE II - GROUP A INSPECTION

INSPECTION	REQ PARA	INSP PARA	AQL MAJOR	AQL MINOR
MECHANICAL/VISUAL				
Tripod, Loudspeaker MT-4040( )/UIH-6	3.6	4.5.2	1%	4%
Parts Kit, Loudspeaker Mounting, Vehicle MK-1138( )/UIH-6	3.6	4.5.2	1%	4%

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE II - GROUP A INSPECTION (cont'd)

INSPECTION	REQ PARA	INSP PARA	AQL MAJOR	AQL MINOR
MECHANICAL/VISUAL				
Control, Amplifier C-7779( )UIH-6	3.6	4.5.2	1%	4%
Loudspeaker Assembly LS-517( )/UIH-6	3.6	4.5.2	1%	4%
Parts Kit, Amplifier Mounting MK-1140( )/UIH-6	3.6	4.5.2	1%	4%
Amplifier, Audio Frequency AM-4254( )/UIH-6	3.6	4.5.2	1%	4%
AIR-SEAL				
Amplifier, Audio Frequency AM-4254( )/UIH-6	3.15.15	4.13	1%	4%
ELECTRICAL				
Amplifier, Audio Frequency AM-4254( )/UIH-6				
Power Gain	3.9.1	4.8)	1%	*
Power Output	3.9.2	4.8)	for	
Noise Level	3.9.4	4.8)	the	
Power Consumption	3.9.7	4.8)	Group	
Overload Protection	3.9.6	4.8)		
Loudspeaker Assembly LS-517( )/UIH-6				
Impedance	3.11.2	4.10	1%	*
Control, Amplifier C-7779( )/UIH-6				
Meter & Lamp Test	3.12.1	4.11	1%	*
Operational (System)	3.13.1	4.12	1%	*

*All electrical defects are considered MAJOR.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

4.5.2 Visual and mechanical inspection.- Equipment shall be examined for the defects listed in Standard MIL-STD-252, the defects listed under Requirement 5 (Soldering) of MIL-STD-454, standards of workmanship listed under Requirement 9 of MIL-STD-454.

4.5.3 Group B inspection.- Group B inspection shall be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been subject to and met the Group A inspection. This inspection shall conform to Table III and to the special inspection levels of Table I of MIL-STD-105.

4.5.3.1 Group B sampling plans.- The Group B sampling plans, for the AQL's listed in Table III, shall be as follows:

AQL	Inspection Level for Normal and Tightened Inspection	Inspection Level for Reduced Inspection
4.0%	S-4	S-3
6.5%	S-4	S-3

4.5.3.2 Order of inspection within Group B.- Group B inspection shall be performed in an order satisfactory to the Government.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

TABLE III GROUP B INSPECTION

INSPECTION	REQ PARA	INSP PARA	AQL
INTERCHANGEABILITY			
ELECTRICAL			
Amplifier, Audio Frequency AM-4254( )/UIH-6			
Frequency Response	3.9.5	4.8	6.5% for group
Harmonic Distortion	3.9.3	4.8	
Control, Amplifier C-7779( )/UIH-6			
Paralleling Output	3.12.2	4.11	
Monitoring Output	3.12.3	4.11	
Gain	3.12.4	4.11	
Noise	3.12.5	4.11	
Harmonic Distortion	3.12.6	4.11	
LOUDSPEAKER ASSEMBLY LS-517( )/UIH-6			
Endurance	3.11.3	4.10	4.0%
SYSTEM			
Overvoltage - Transient	3.9.8	4.8	4.0%
PARTS KIT, AMPLIFIER MOUNTING MK-1140( )/UIH-6			
Operational	3.10	4.9	4.0%

4.5.4 Group C inspection.- Group C inspection shall be performed on units that have passed Group A and Group B inspection. The inspection shall consist of the inspections specified in Table IV. Samples shall be selected in accordance with 4.5.4.1

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

4.5.4.1 Sampling for Group C inspection.-

4.5.4.1.1 Subgroup I.-For this subgroup, one unit shall be selected from the first production lot. For subsequent Group C inspection, one unit shall be selected every 60 days until three consecutive inspections have met specification. At this time one unit shall be selected every 120 days. If a failure occurs, the Group C inspection shall revert back to 60 day inspection.

4.5.4.1.2 Subgroup II.- For this subgroup, one unit shall be selected from the first production lot. For subsequent Group C inspection, one unit shall be selected every 180 days.

4.5.4.1.3 Subgroup III.- For this subgroup, one unit shall be selected from the first production lot. For subsequent Group C inspection, one unit shall be selected every 360 days. If production is less than 360 days, a minimum of one unit shall be selected.

4.5.4.2 Order of inspection with Group C.- Group C inspection shall be performed in the order specified in 4.5.4.1.

4.5.4.3 Group C failures.- Actions required relative to Group C failures shall be as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE IV - GROUP C INSPECTION

INSPECTION	REQUIRED PARAGRAPH	INSPECTION PARAGRAPH
SUBGROUP I		
Immersion (A,C,L)	3.15.9	4.13
Vibration (A,C,L,M(A),M(L))	3.15.2	4.13
Performance (L)	3.11.1	4.10
Dust* (A,C,L/T)	3.15.12	4.13
SUBGROUP II		
Temperature - Altitude (A,C,L)	3.15.1	4.13
Orientation (A,C,L)	3.15.5	4.13
Humidity, Relative (A,C,L)	3.15.3	4.13
Rain (A,C,L)	3.15.10	4.13
Explosive Atmosphere (A,C,L)	3.15.4	4.13
Electromagnetic Compatibility (A,C,L)	3.15.16	4.13
Fungus* (A,C,L/T)	3.15.14	4.13
SUBGROUP III		
Bounce, Vehicular (A/M(A),L/M(L))	3.15.6.1	4.13
Bounce, Loose Cargo (A,C,L,T)	3.15.6.2	4.13
Shock, Ballistic (A/M(A),L/M(L))	3.15.7.1	4.13
Bench, Handling (A,C,L)	3.15.8	4.13
Drop (C,A/BATTERY)	3.15.11.1	4.13
Drop (L)	3.15.11.2	4.13
Salt Fog* (A,C,L/T)	3.15.13	4.13

*The equipment shall be thoroughly washed, cleaned, dried and refurbished after this inspection before proceeding with subsequent inspection.

NOTE. The abbreviations shown in bowlegs ( ) are defined in Note "e" following Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.5.5 Reinspection of conforming Group B and C sample units.- Unless otherwise specified, sample units which have been subjected to and passed both Group B and Group C inspection may be accepted on the contract provided all damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.5.6 Group D inspection.- This inspection shall consist of the tests specified in Table V and shall be performed on units from lots which have been subjected to and met Group A and Group B inspection.

4.5.6.1 Sampling for Group D inspection.- Samples shall be selected at random and as further specified in para 4.14.

4.5.6.2 Group D failures.-Actions required relative to Group D failures shall be in accordance with para 4.14.

TABLE V GROUP D INSPECTION

INSPECTION	REQ PARA	INSP PARA
Reliability	3.16	4.14

4.5.7 Reinspection of conforming Group D sample units.- Unless otherwise specified, sample units which have been subjected to and passed Group D inspection may be accepted on the contract or purchase order provided all visible and known damage is repaired and the sample units are resubjected to and pass Group A inspection.

4.6 Preconditioning. -

4.6.1 Bounce Preconditioning.- Equipments shall be subjected to the bounce preconditioning requirements of 3.14.1.

4.6.2 Burn-In. -

4.6.2.1 Sequence of testing.- Before subjecting equipments to this procedure, the contractor must have available objective evidence of compliance to Group A requirements.

4.6.2.2 Test conditions.- Every equipment shall be subjected to a 24 hour burn-in period. The last 12 hours of burn-in shall be failure free. The burn-in shall be conducted as if it were the beginning of a Production Reliability Test. The failures shall be recorded and analyzed, but shall not be considered relevant for computation of equipment MTBF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.6.2.3 Compliance.- Units passing burn-in shall be submitted to Group A, B, C, and D inspection in that order without benefit of repair, cleaning, realignment, or other changes, unless otherwise specified herein. If after successful completion of burn-in, the equipment fails either the Group A or B tests, the equipment will be reworked and resubmitted to burn-in.

4.7 Interchangeability.- The system shall be examined to demonstrate compliance with the interchangeability requirements of 3.5.

4.8 Amplifier, Audio Frequency AM-4254( )/UIH-6 tests.- The amplifier shall be tested to demonstrate compliance with the requirements of 3.9 when operated under the conditions specified therein.

4.9 Parts Kit, Amplifier Mounting, MK-1140( )/UIH-6 tests.- The amplifier rack shall be tested to demonstrate compliance with the requirements of 3.10 when operated under the conditions specified therein.

4.10 Loudspeaker Assembly LS-517( )/UIH-6 tests.- The loudspeaker assembly shall be tested to demonstrate compliance with the requirements of 3.11 when operated under the conditions specified therein.

4.11 Control, Amplifier C-7779( )/UIH-6 tests.- The control shall be tested to demonstrate compliance with the requirements of 3.12 when operated under the conditions specified therein.

4.12 System test.- The amplifier, control and loudspeaker assembly shall be tested to demonstrate compliance with the operational system requirements of 3.13 when operated under the conditions specified therein.

4.13 Service condition tests.- The units as specified shall be tested to demonstrate compliance with the service conditions of 3.15 when operated under the conditions specified therein.

4.14 Reliability testing (see 3.16).-

4.14.1 Reliability Qualification test.- The contractor shall perform a Reliability Qualification Test in accordance with the Test Plan XX of MIL-STD-781 on 4 of the First Article units produced. The specified MTBF (θ_0) shall be 400 hours. The minimum test time per equipment shall be in accordance with para. 4.2.2.4 of MIL-STD-781.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.14.2 Production Reliability testing.- After successfully passing the Reliability Qualification Test, production reliability testing shall begin. The Production Sampling Tests shall commence with the first lot available after the models used for First Article testing. Four samples shall be selected from each production lot and tested in accordance with Test Plan IV of MIL-STD-781. The specified (θ_0) MTBF shall be 400 hours. The minimum test time per equipment shall be in accordance with para. 4.2.2.4 of MIL-STD-781. For purposes of Reliability testing, a production lot shall consist of 25 equipments.

4.14.3 Testing.- All testing shall be of Test Level B of MIL-STD-781. Equipment on-off cycling shall be on for 7.5 hours, off for 0.5 hours.

4.14.4 Failure definition.- A failure is defined as the inability of the equipment to perform its required function. This includes any event which causes departure from performance as required by this specification or the contractors approved test procedures. Paragraph 5.5 through 5.10 inclusive of MIL-STD-781 shall apply. The types of failures and required actions shall be in accordance with para. 5.5 of MIL-STD-781. Determination of compliance shall be in accordance with para. 5.4.8 of MIL-STD-781.

4.14.4.1 Electrical Measurements.- As a minimum, power gain and harmonic distortion shall be checked every hour in accordance with paragraphs 3.9.1 and 3.9.3 and power output shall be checked every 7 1/2 hours in accordance with paragraph 3.9.2.

4.14.5 Rework and retest provisions.- Once a reject decision has been reached, no rerun can be made of that test on the same or a new sample from the lot unless positive action consisting of design change, modification, or rework actually relating to observed failures has been applied to the lot. Any subsequent rerun must start at zero hours operating time.

4.14.6 Audio input.- The audio input shall sweep logarithmically from 500 to 5000 Hz peaking at 250 watts into the loudspeaker for 12 seconds out of every minute during equipment on time.

4.14.7 Equipment configuration.- Equipment undergoing reliability testing shall be configured as shown in Figure 22.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T03:58Z
Check the source to verify that this is the currentversion before use.

4.15 Quality conformance inspection of preparation for delivery (see 5). - Preparation for delivery shall be inspected in accordance with Specification MIL-P-116 to determine conformance to the requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. - Preservation and packaging shall be Level A or C, (see 6.2).

5.1.1 Level A. -

5.1.1.1 Cleaning. - The equipment shall be cleaned in accordance with Process C-1 of MIL-P-116.

5.1.1.2 Drying. - The equipment shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application. - None required.

5.1.1.4 Unit packaging. - Unit packaging shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical literature. - Each technical literature shall be individually packaged Method 1C-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5.1.1.4.2 Cable Assemblies (except Kits). - Each cable assembly shall be packaged Method III as follows: Wind each cable assembly into a coil of proportionate dimensions and secure with twine conforming to T-T-871, 16 ply, in three equidistant ties which shall include the terminations within the eye of the coil. Place the secured coils for each set within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Fill all voids with paperboard conforming to PPP-P-291, Type I, to prevent movement during handling and shipping. Close the box in accordance with the Appendix of the box specification.

5.1.1.4.3 Connector Adapter and Connector, Plug. - Each adapter and connector shall be individually packaged Method IC-1.

5.1.1.4.4 Microphone, Dynamic M-80( )/GR. - Each microphone shall be individually packaged Method III as follows: Cushion the microphone by wrapping in paperboard conforming to PPP-P-291, Type I, and secure the wrap with tape conforming to PPP-T-45, Type III, Grade A.

5.1.1.4.5 Consolidation. - Consolidate the adapter, connector and microphone, packaged as specified in 5.1.1.4.3 and 5.1.1.4.4, within a close-fitting paperboard box conforming to MIL-B-43014, Form I, Style II, Type A. Fill all voids with paperboard conforming to PPP-P-291, Type I, to prevent movement during handling and shipping. Close the box in accordance with the Appendix of the box specification.

5.1.1.4.6 Tripod, Loudspeaker MT-4040( )/UIH-6 and Packboard. - Each tripod and packboard shall be individually packaged Method III as follows: Collapse the tripod to smallest dimensions. Cushion each item by wrapping in paperboard conforming to PPP-P-291, Type I, and secure the wrap with tape conforming to PPP-T-45, Type III, Grade A. Place the cushioned item within a close-fitting fiberboard box conforming to PPP-B-636, W6c. Close the box in accordance with the Appendix of the box specification.

5.1.1.4.7 Parts Kit, Loudspeaker Mounting, Vehicle MK-1138( )/UIH-6 and Parts Kit, Amplifier Mounting MK-1140( )/UIH-6. - Each kit shall be individually packaged Method III as follows: Place bolts, nuts, screws, washers and clamps in quantities required for each kit within a cotton bag conforming to PPP-B-20. Secure the bag with the drawstrings. Each adapter, quick-disconnect shall be individually packaged Method IC-I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5.1.1.4.7 Parts Kit, Loudspeaker Mounting, Vehicle MK-1138( )/UIH-6 and Parts Kit, Amplifier Mounting MK-1140( )/UIH-6. - (Cont'd) Each Cable Assembly, Power Electrical CX-11590/U and ground strap shall be individually wound into coils of proportionate dimensions and secured with twine conforming to T-T-871. Individually cushion the coiled cable assemblies, ground straps, brackets, channels, plates and racks by wrapping in paperboard conforming to PPP-P-291, Type I, and secure the ties required for each kit; place the packaged hardware, adapters, cable assemblies ground straps, brackets, channels, plates and racks into a close-fitting fiberboard box conforming to PPP-B-636, W5c. Fill all voids with the same type paperboard to prevent movement during handling and transit. Close the box in accordance with the Appendix of the box specification.

5.1.1.4.8 Amplifier, Audio Frequency AM-4254( )/UIH-6; Loudspeaker Assembly LS-517( )/UIH-6; and Control, Amplifier C-7779( )/UIH-6. - Each amplifier, loudspeaker assembly and control shall be individually packaged Method III as follows: Secure cover caps to receptacles. Bushion the unit on all surfaces with cells or pads or both fabricated of fiberboard conforming to PPP-F-320, Type CF, class weather-resistant, variety SW, Grade W5c, designed to protect all projections and absorb the shock of impact in handling and transit. Place the cushioned item within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Close the box in accordance with the Appendix of the box specification.

5.1.1.4.9 Public Address Set AN/UIH-6( ). - Consolidate the items, packaged as specified in 5.1.1.4.2 and 5.1.1.4.5 through 5.1.1.4.8, in quantities required for each set, within a close-fitting fiberboard box conforming to PPP-B-636, V3c. Fill all voids with paperboard conforming to PPP-P-291, Type I, to prevent movement during handling and shipping. Place the technical literature, packaged as specified in 5.1.1.4.1, on top of the contents, directly below the lid of the container. Close the box in accordance with the Appendix of the box specification.

5.1.2 Level C. - Public Address Set AN/UIH-6( ) shall be preserved and packaged in a manner that will afford adequate protection against physical and environmental damage during shipment, handling and limited intransit storage.

5.2 Packing. - Packing shall be Level A, B, or C as specified. Shipping containers for all levels shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:58Z
Check the source to verify that this is the currentversion before use.

5.2.1 Level A. - A quantity of Public Address Set AN/UIH-6( ), packaged as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. Fiberboard boxes being placed directly in the shipping container shall be waterproofed with tape conforming to PPP-T-76, in accordance with the taping requirements of the appendix of the box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, Type 1, finish A.

5.2.2 Level B. - A quantity of Public Address Set AN/UIH-6( ), packaged as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, domestic type; PPP-B-621, style 4, class 1; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the time and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto.

5.2.3 Level C. - Public Address Set AN/UIH-6( ), packaged as specified in 5.1, shall be packed in shipping containers that comply with Federal or Military specifications, in a manner that will afford adequate protection to the package and its contents against physical and environmental deterioration and damage, during limited shipment, handling and intransit storage.

5.3 Marking. - In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:58Z
Check the source to verify that this is the currentversion before use.

6. NOTES.

6.1 Intended use. - Public Address Set AN/UIH-6( ) is intended to provide a general purpose public address set for ground-to-ground and air-to-ground operation.

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specification and any amendment thereto.

b. Levels of preservation and packaging and packing (see Section 5).

6.3 Nomenclature. - The parentheses in the nomenclature will be deleted or replaced by a letter identifying the particular design; for example: AN/UIH-6B. The contractor should apply for nomenclature in accordance with the applicable clause in the contract.

Custodian:

Army - (EL)

Preparing Activity

Army - (EL)

Project No. 5830-A050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

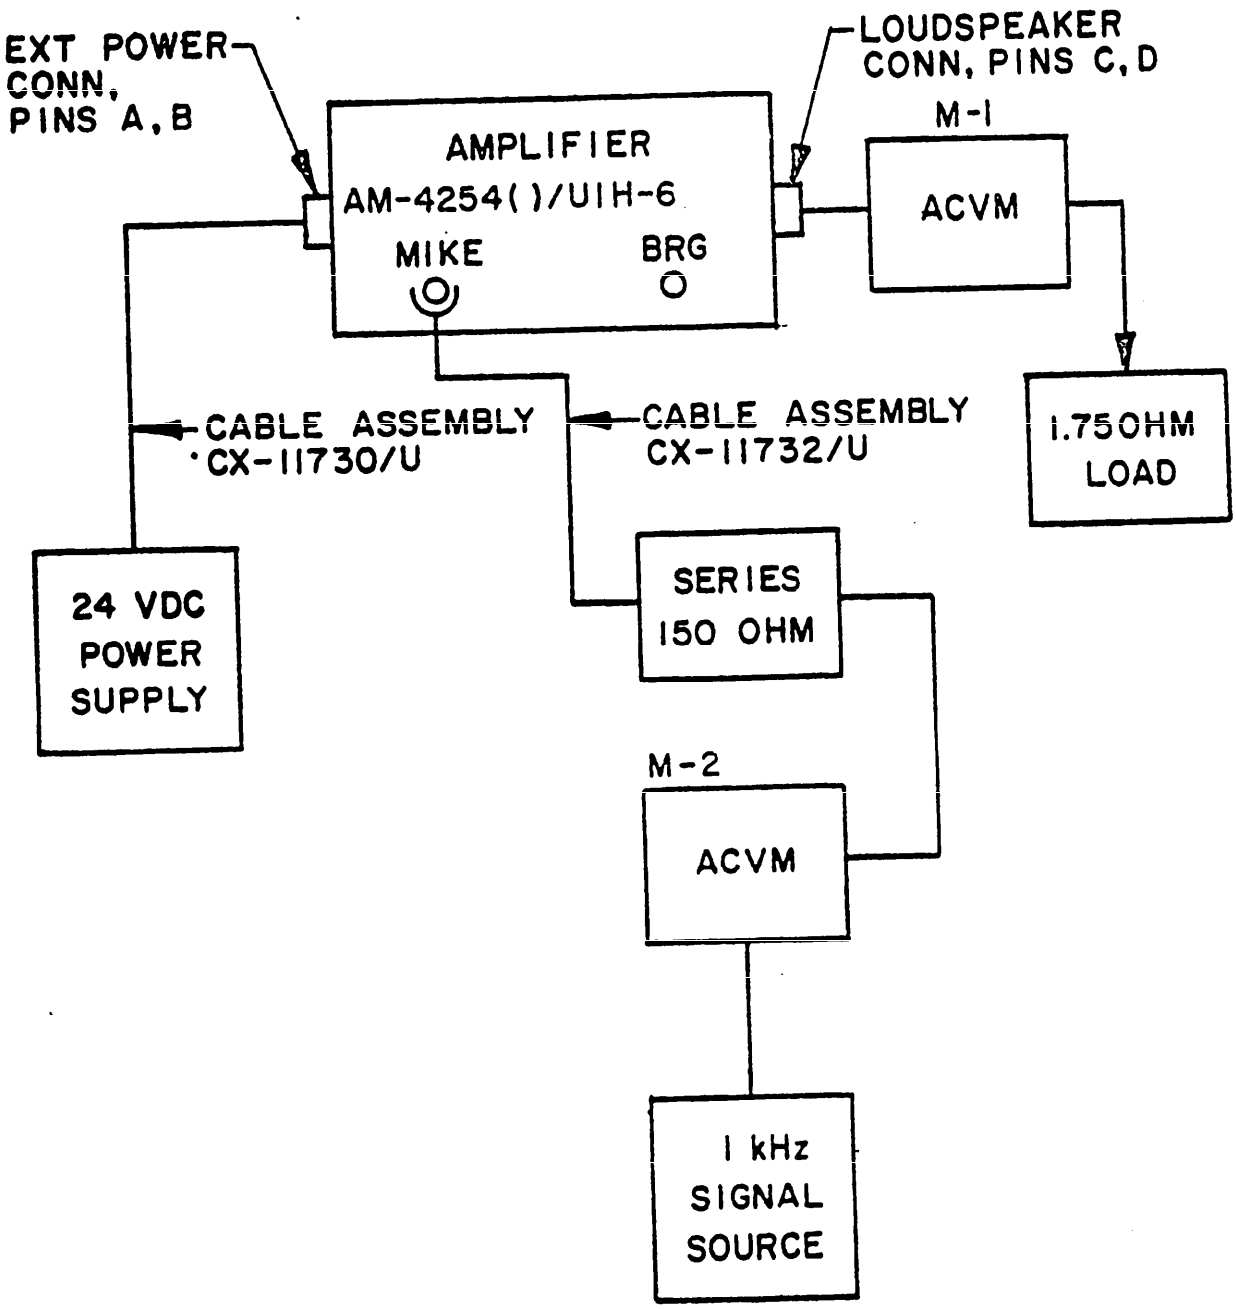


FIGURE 1. CIRCUIT FOR MEASURING AMPLIFIER POWER GAIN AND POWER OUTPUT AMPLIFIER, A.F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

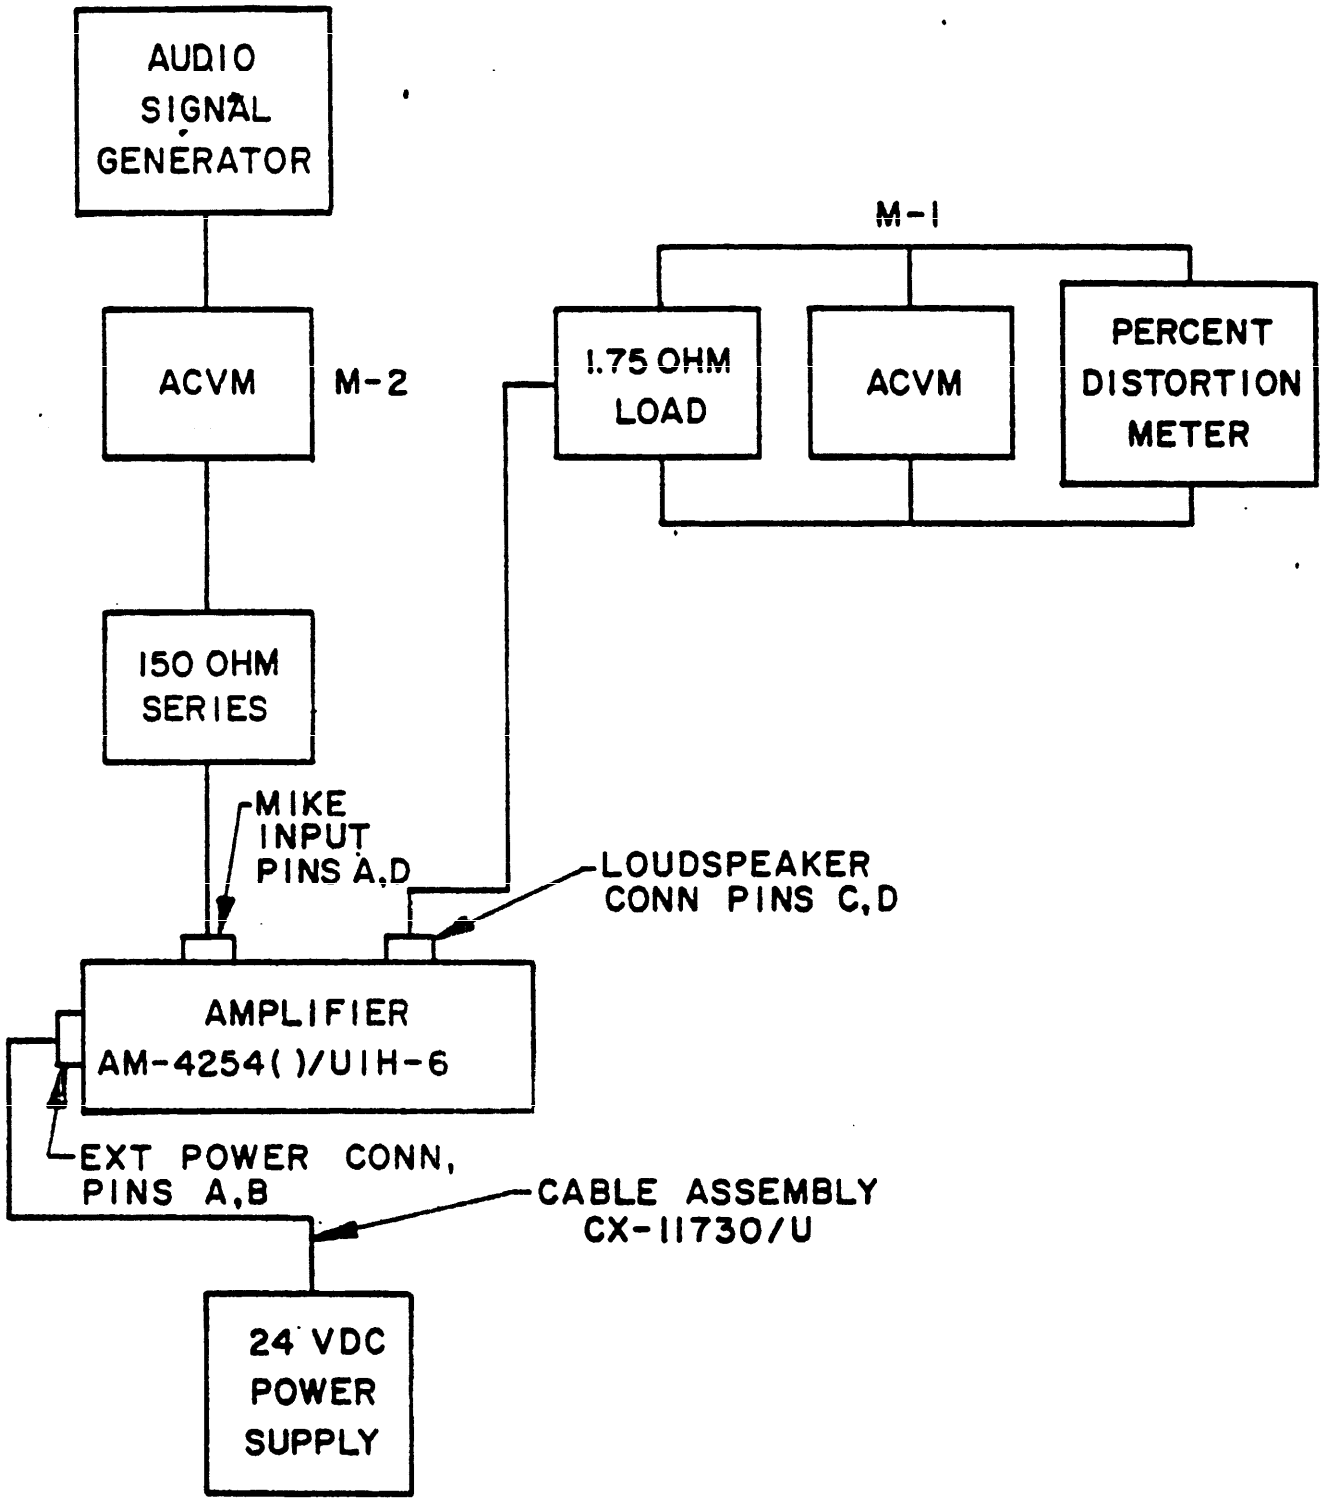


FIGURE 2

CIRCUIT FOR MEASURING AMPLIFIER HARMONIC DISTORTION

AMPLIFIER A. F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

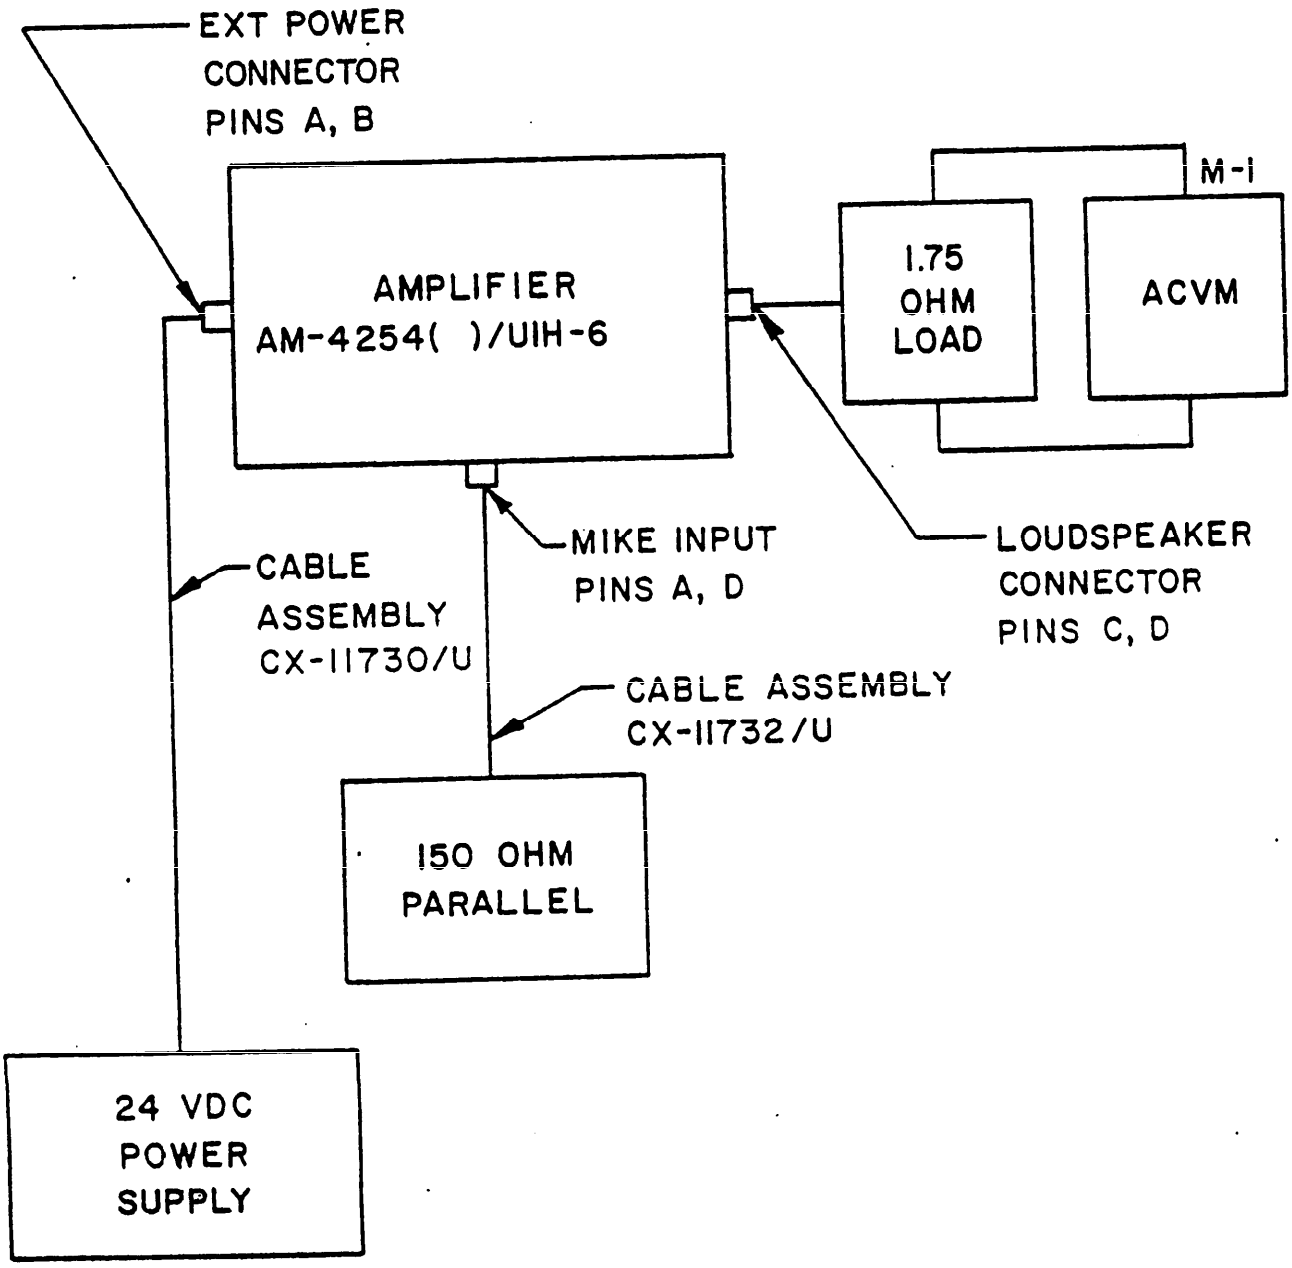


FIGURE 3

CIRCUIT FOR MEASURING NOISE LEVEL

AMPLIFIER, A.F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.


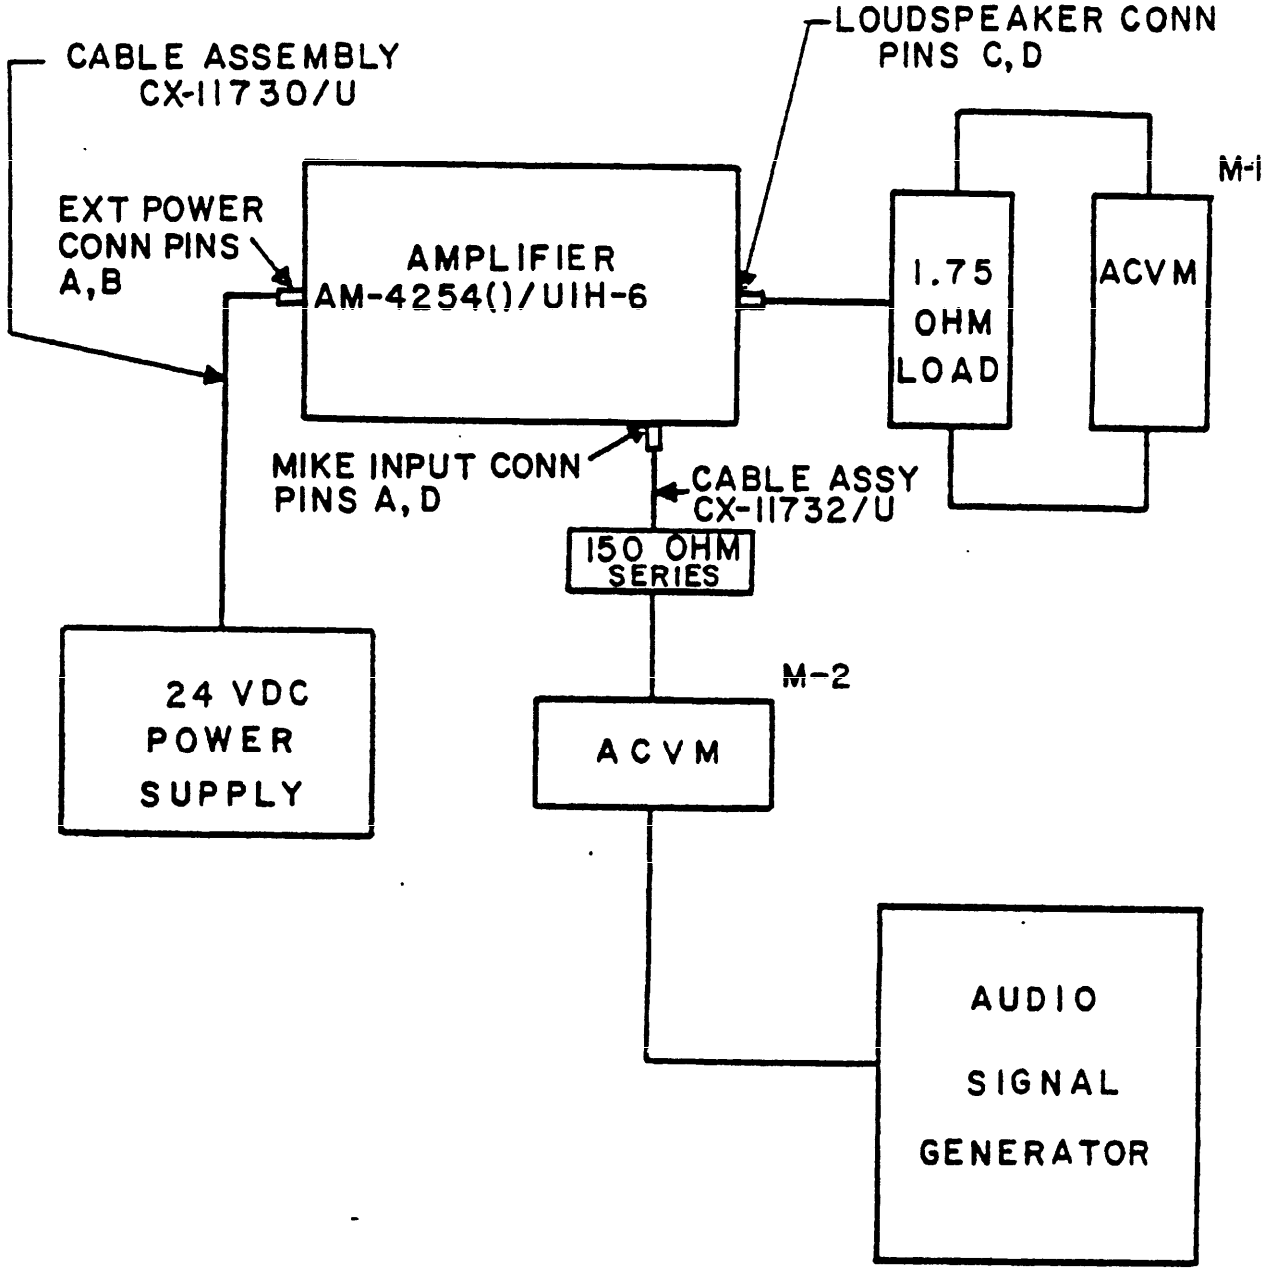


FIGURE 4

CIRCUIT FOR DETERMINING FREQUENCY RESPONSE

AMPLIFIER, A. F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

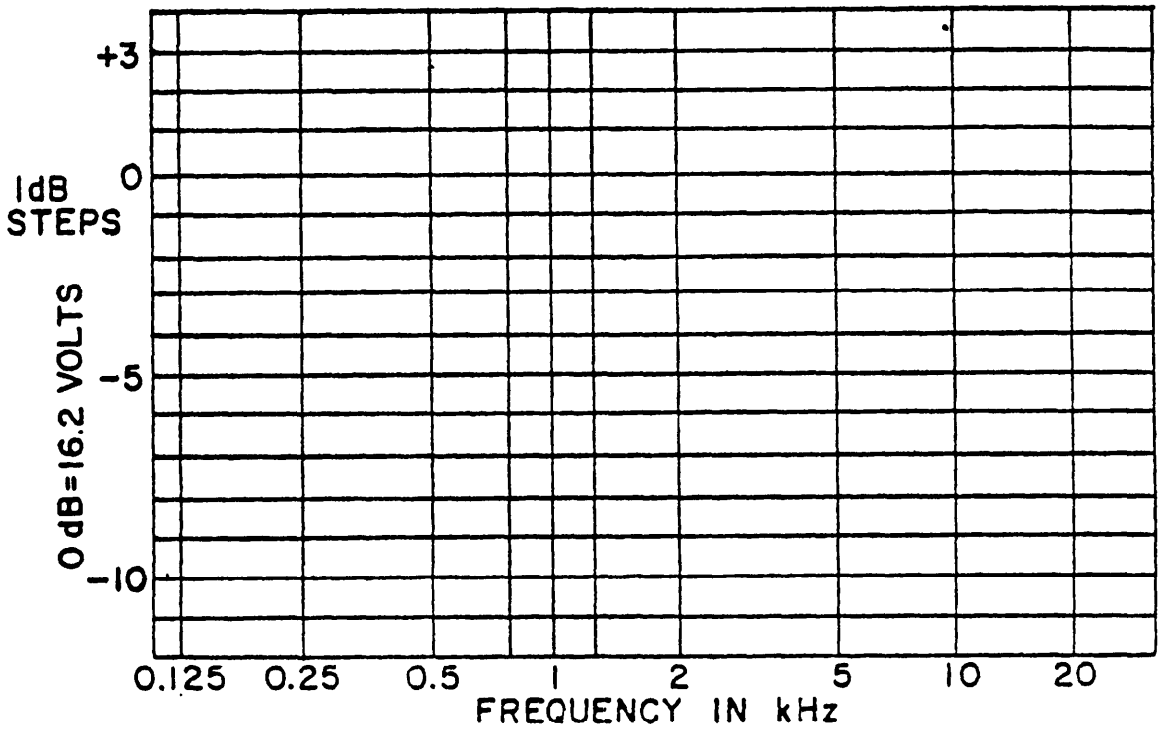

GRAPH THE CURVE OF THE POINTS RECORDED ABOVE. SET A ZERO dB REFERENCE BETWEEN POINTS A AND B AND TRANSPOSE THE ABOVE CURVE TO THE GRAPH BELOW. THE GRAPH SHOULD FALL WITHIN THE LIMITS AS OUTLINED.

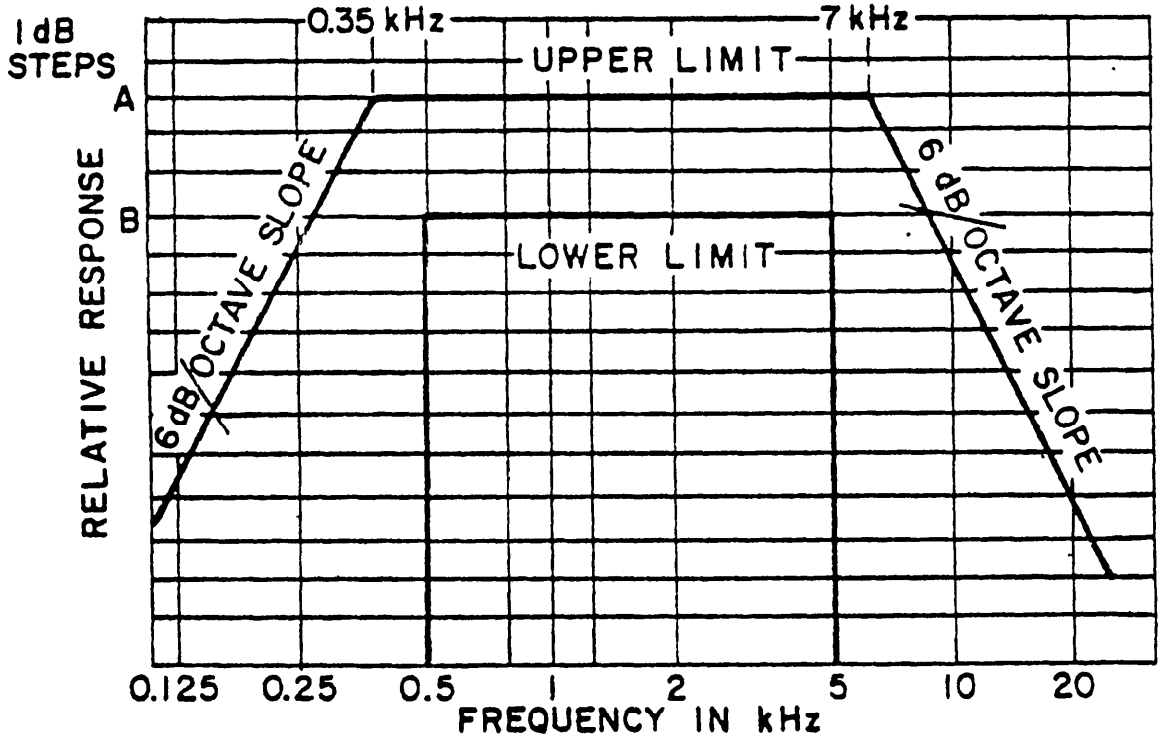


FIGURE 5. FREQUENCY RESPONSE GRAPH AMPLIFIER, A. F. AM4254( )/ UIH-6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.


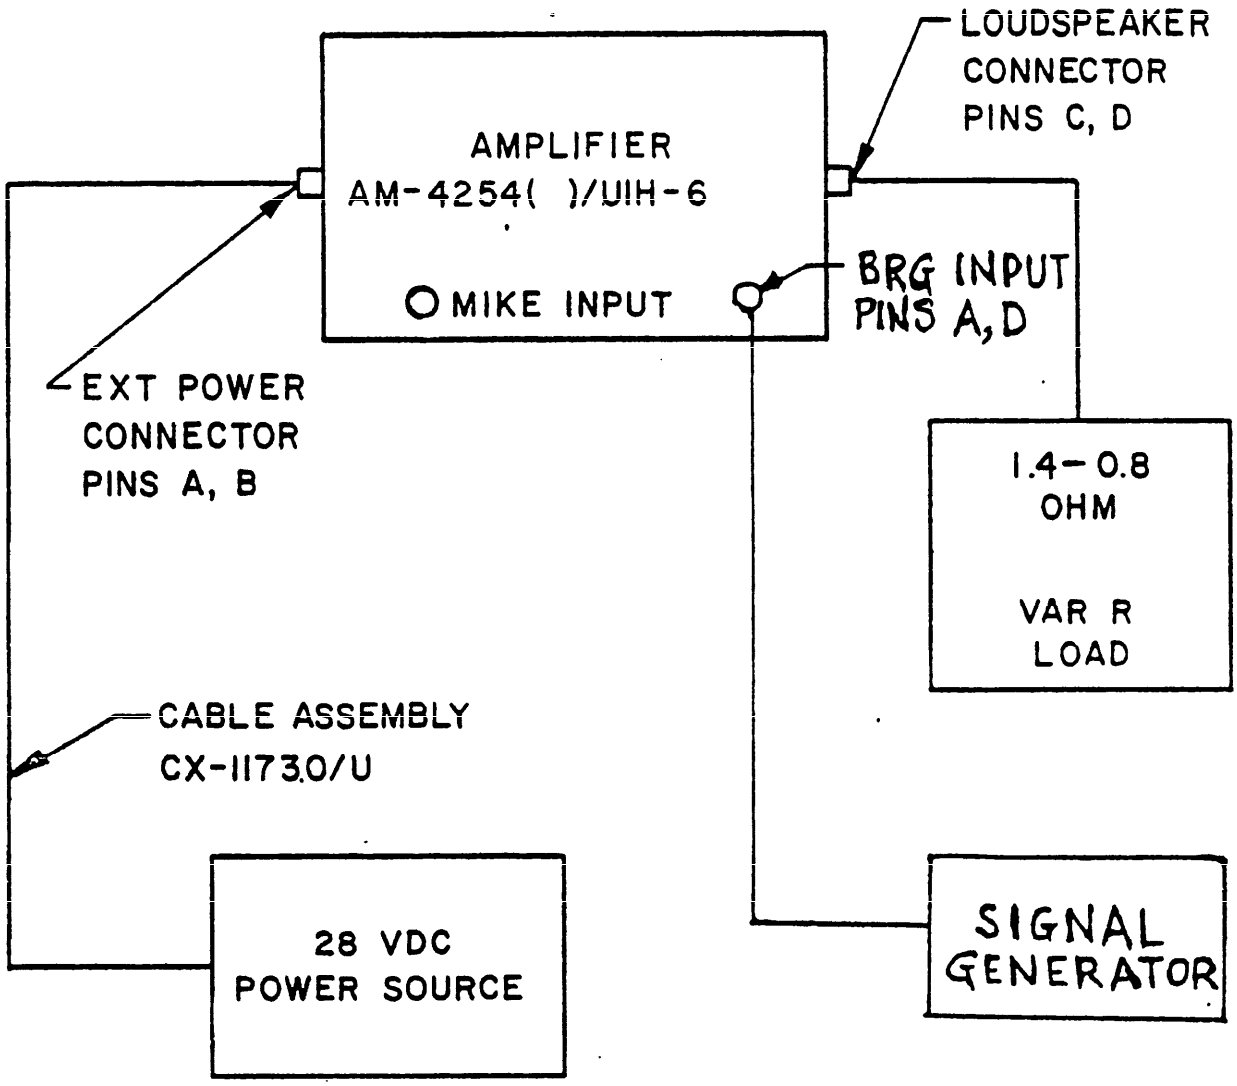


FIGURE 6

CIRCUIT FOR TESTING IMPEDANCE
OVERLOAD PROTECTION
AMPLIFIER, A.F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

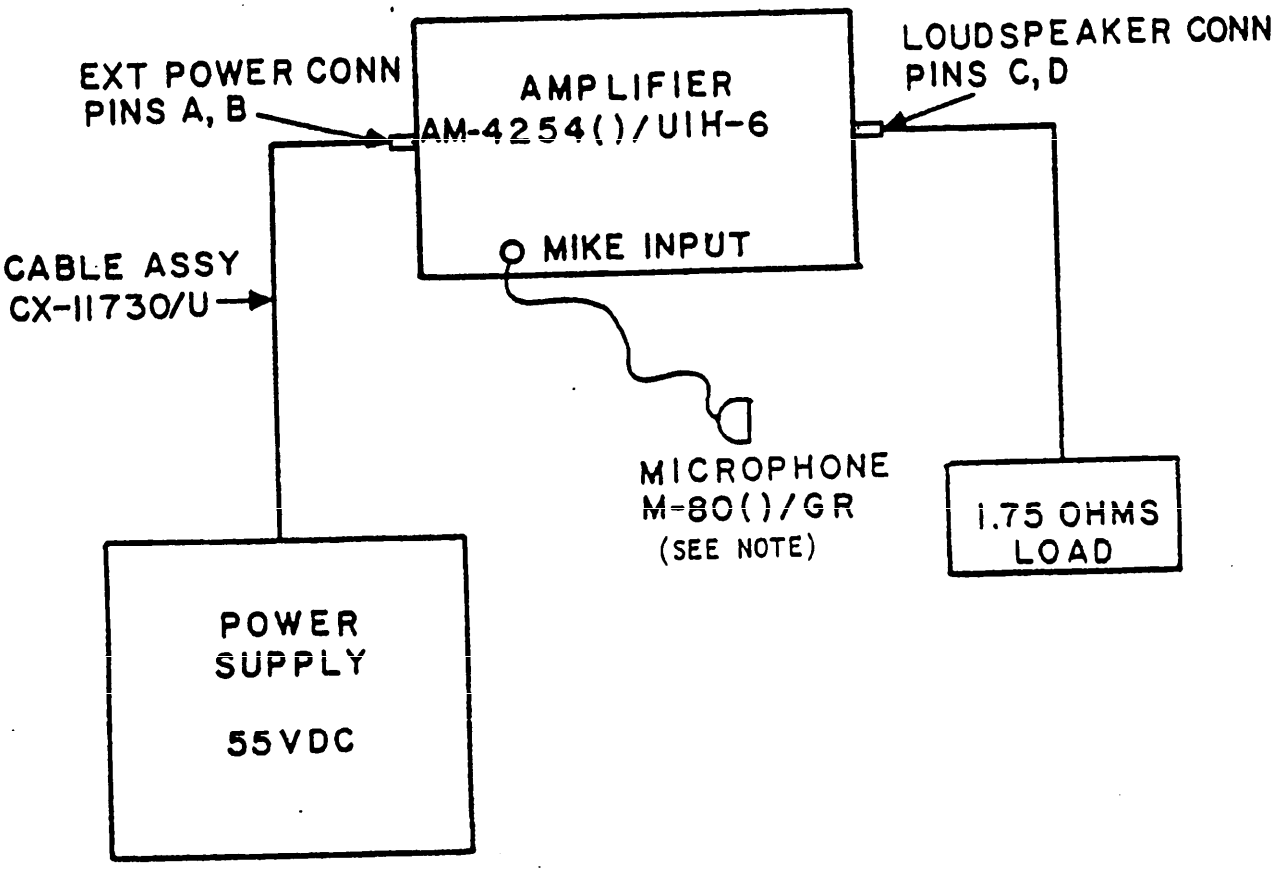

NOTE: FOR TESTING USE DYNAMIC MICROPHONE, TYPE AEM-MIC-4, AS SUPPLIED BY APPLIED ELECTRO MECHANICS, INC., ALEXANDRIA, VIRGINIA, OR EQUAL.

FIGURE 7

CIRCUIT FOR TESTING VOLTAGE OVERLOAD PROTECTION

AMPLIFIER, A. F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.


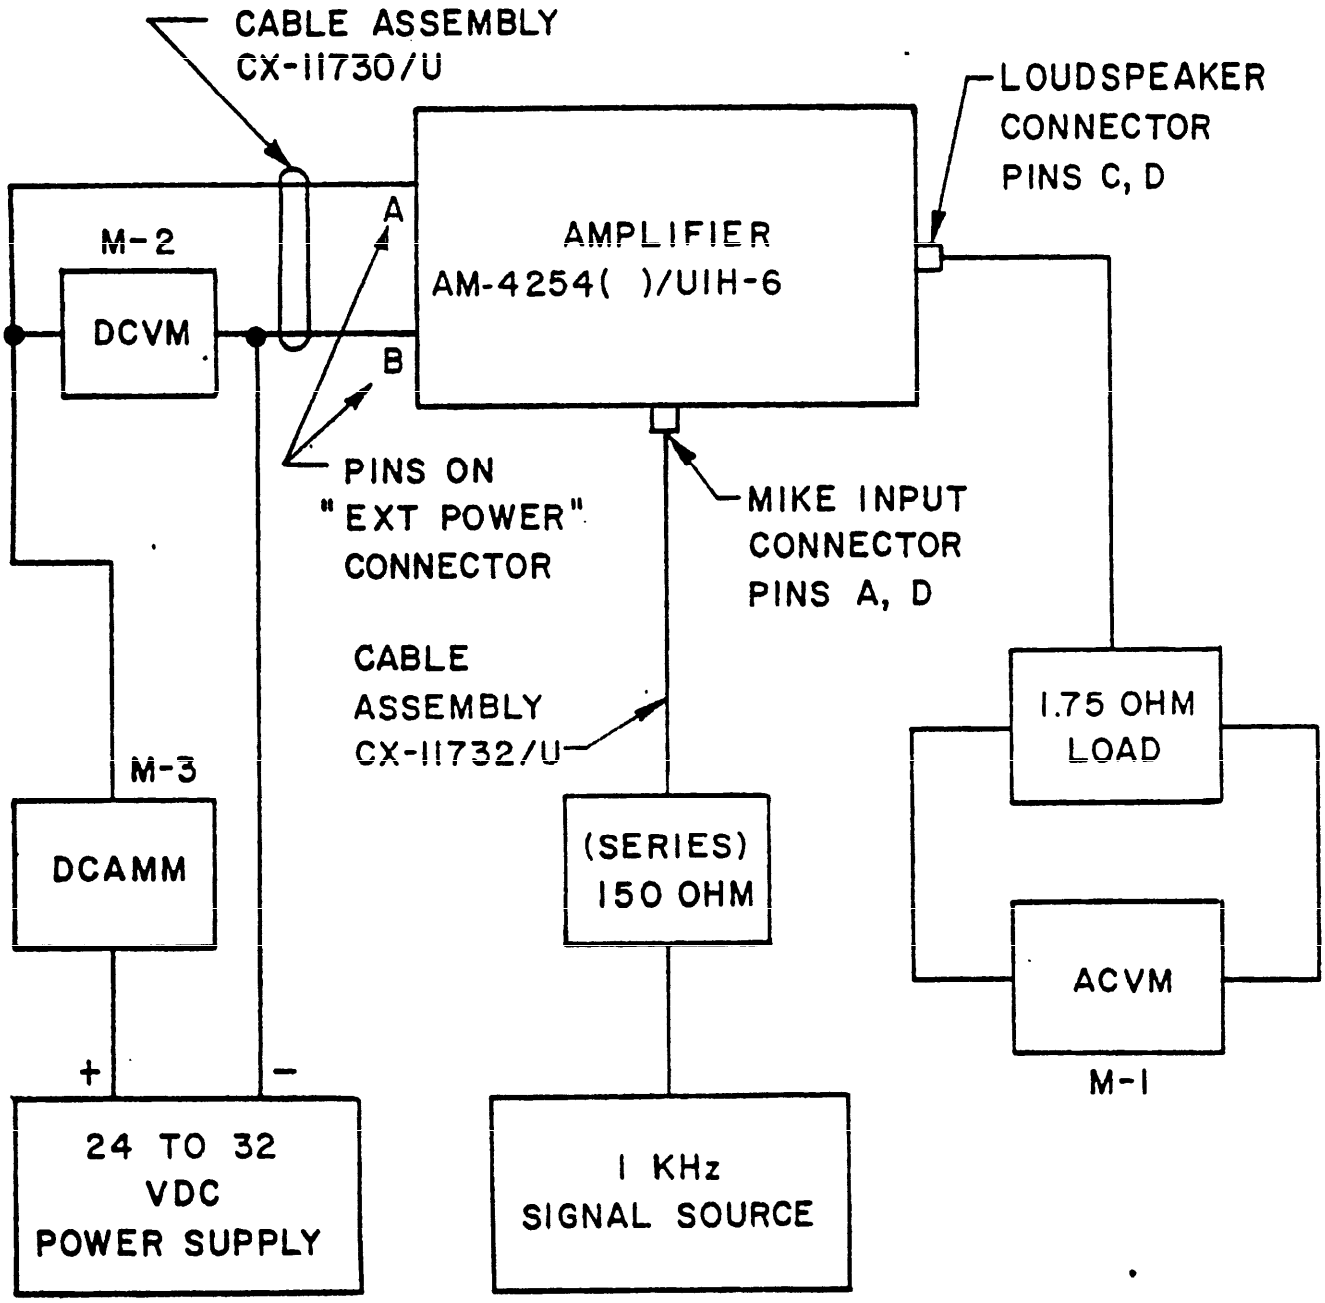


FIGURE 8

CIRCUIT FOR MEASURING POWER CONSUMPTION
AMPLIFIER, A. F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

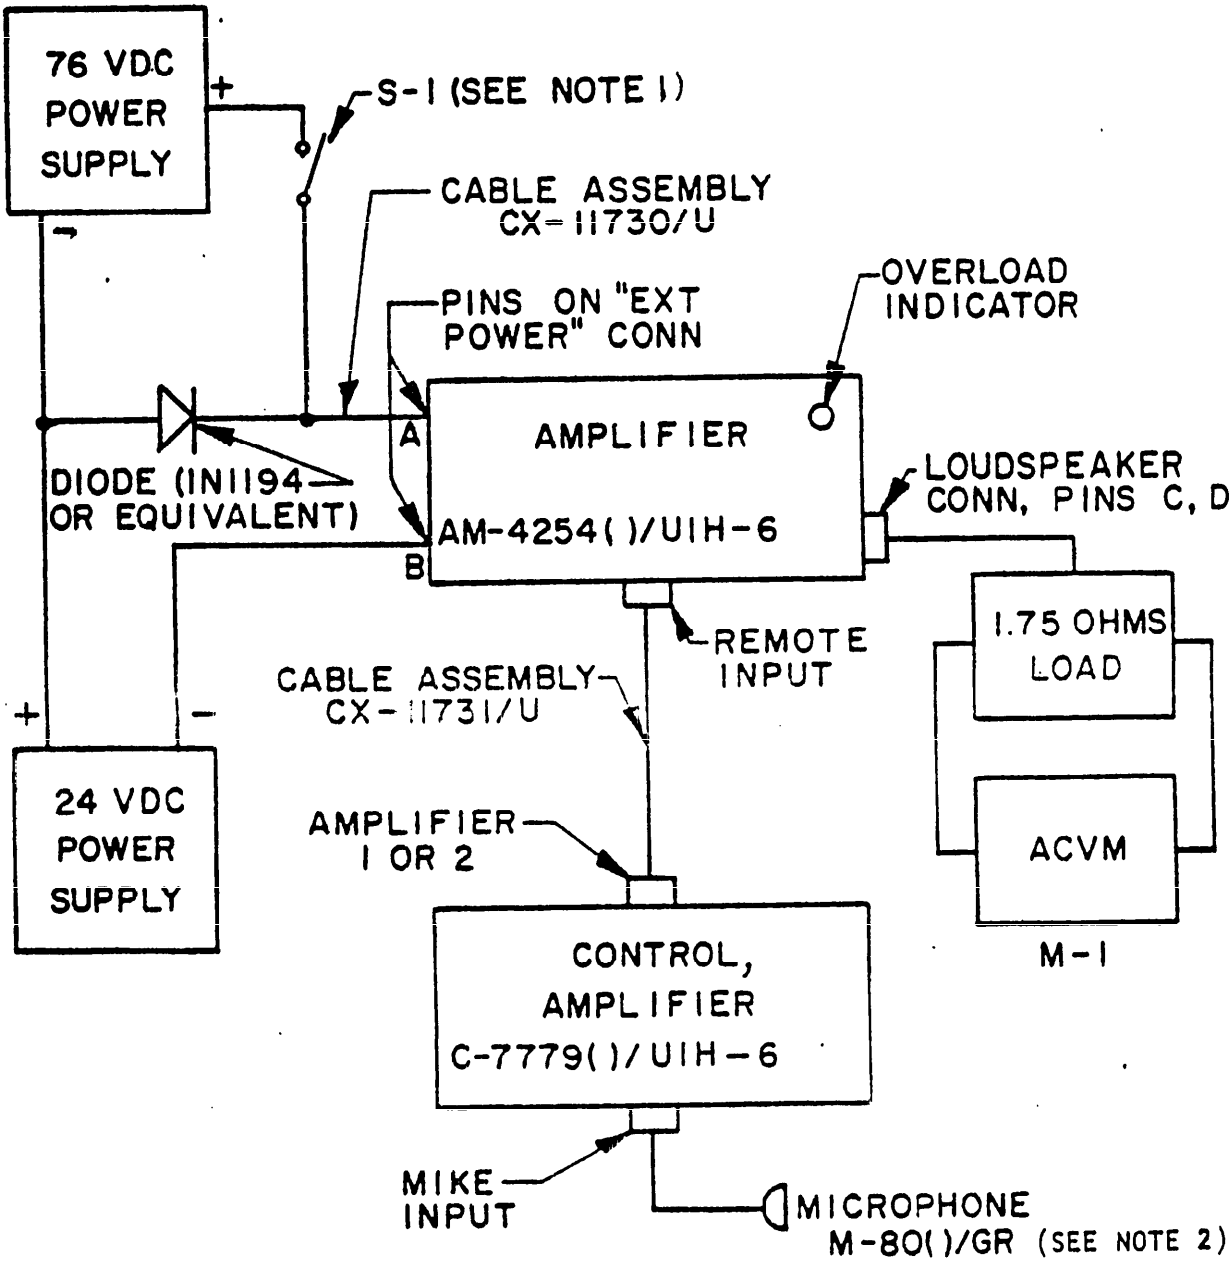


NOTE:

1. S-1 CONNECTED TO 150 MILLISECOND TIMER.
2. FOR TESTING USE DYNAMIC MICROPHONE, TYPE AEM-MIC-4, AS SUPPLIED BY APPLIED ELECTRO MECHANICS, INC., ALEXANDRIA, VIRGINIA, OR EQUAL.

FIGURE 9. CIRCUIT FOR TESTING OVERVOLTAGE PROTECTION AMPLIFIER, A.F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

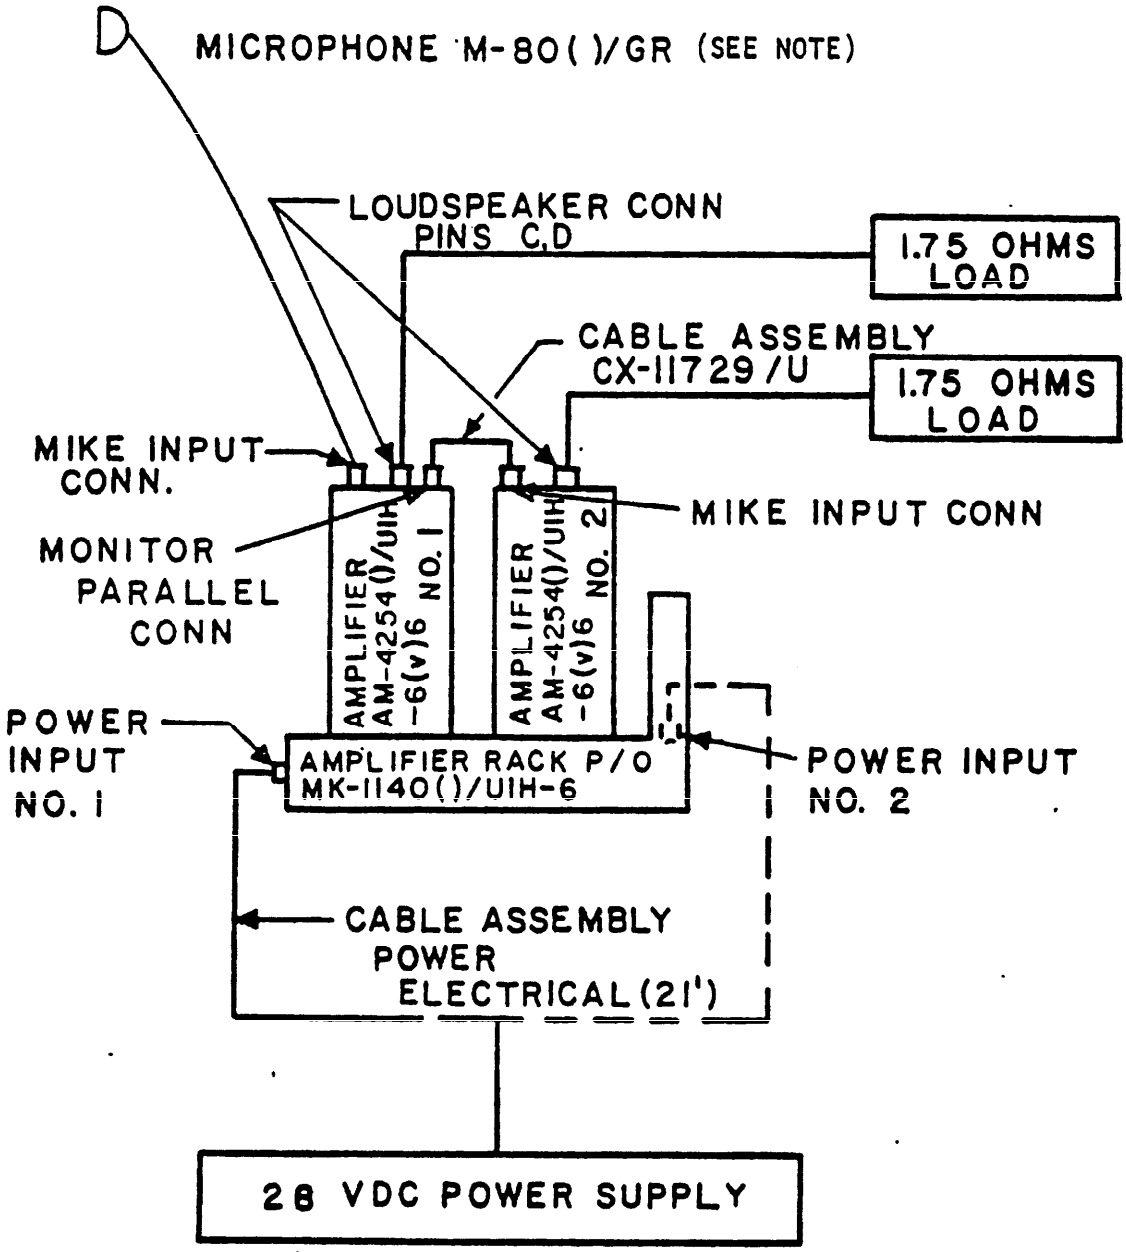


NOTE: FOR TESTING USE DYNAMIC MICROPHONE, TYPE AEM-MIC-4, AS SUPPLIED BY APPLIED ELECTRO MECHANICS, INC., ALEXANDRIA, VIRGINIA, OR EQUAL

FIGURE 10

AMPLIFIER MOUNTING OPERATIONAL TEST

P/O MK-1140( )UIH-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

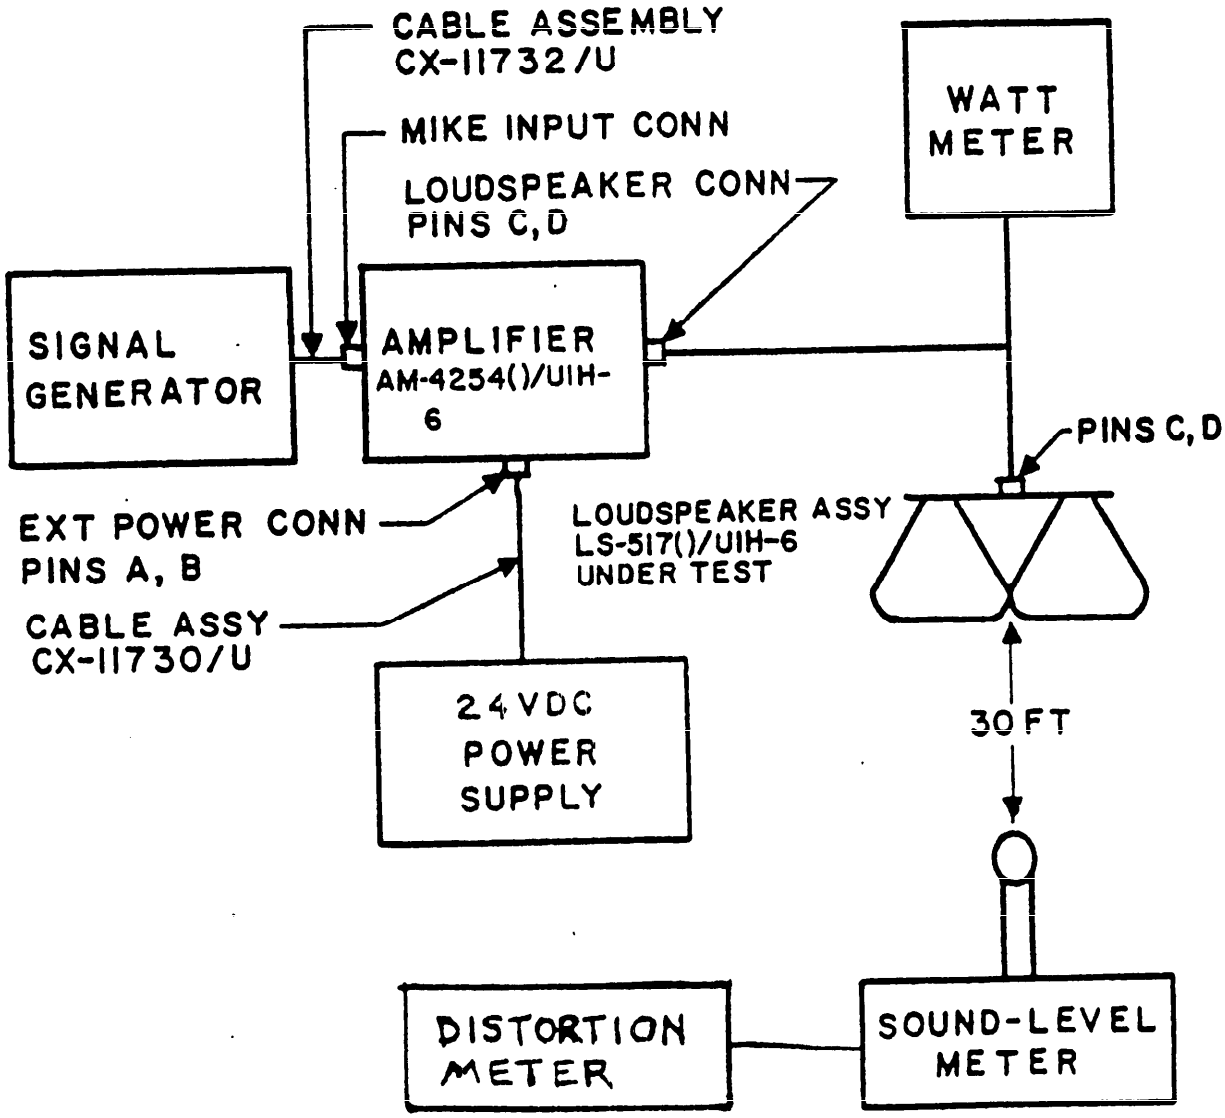


CAUTION: DURING TESTS USING THE LOUDSPEAKER ASSEMBLY, TEST PERSONNEL AND OTHER PERSONS IN THE VICINITY OF THE TEST AREA SHOULD TAKE ADEQUATE PRECAUTIONS AGAINST THE HIGH SOUND LEVEL WHICH CAN BE INJURIOUS.

FIGURE 11

LOUDSPEAKER ASSY LS-517()/UIH-6 TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

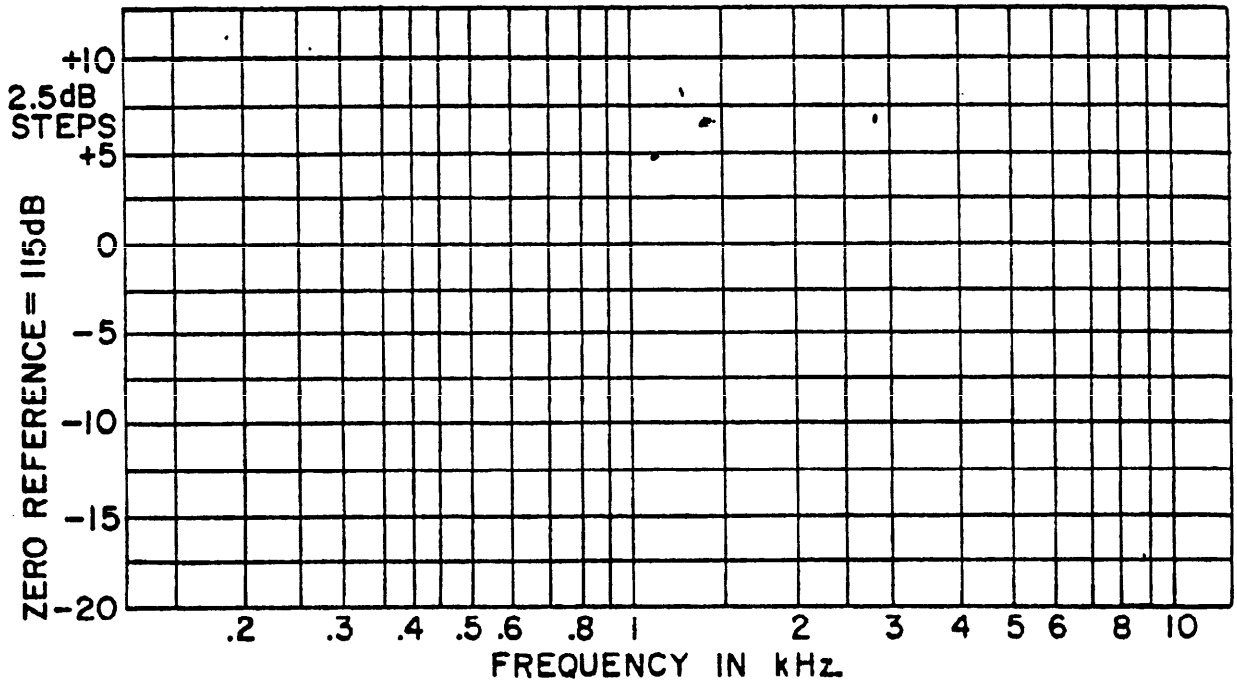

GRAPH THE CURVE OF THE POINTS RECORDED ABOVE. SET A ZERO dB REFERENCE BETWEEN POINTS A AND B AND TRANSPOSE THE ABOVE CURVE TO THE GRAPH BELOW. THE GRAPH SHOULD FALL WITHIN THE LIMITS AS OUTLINED.

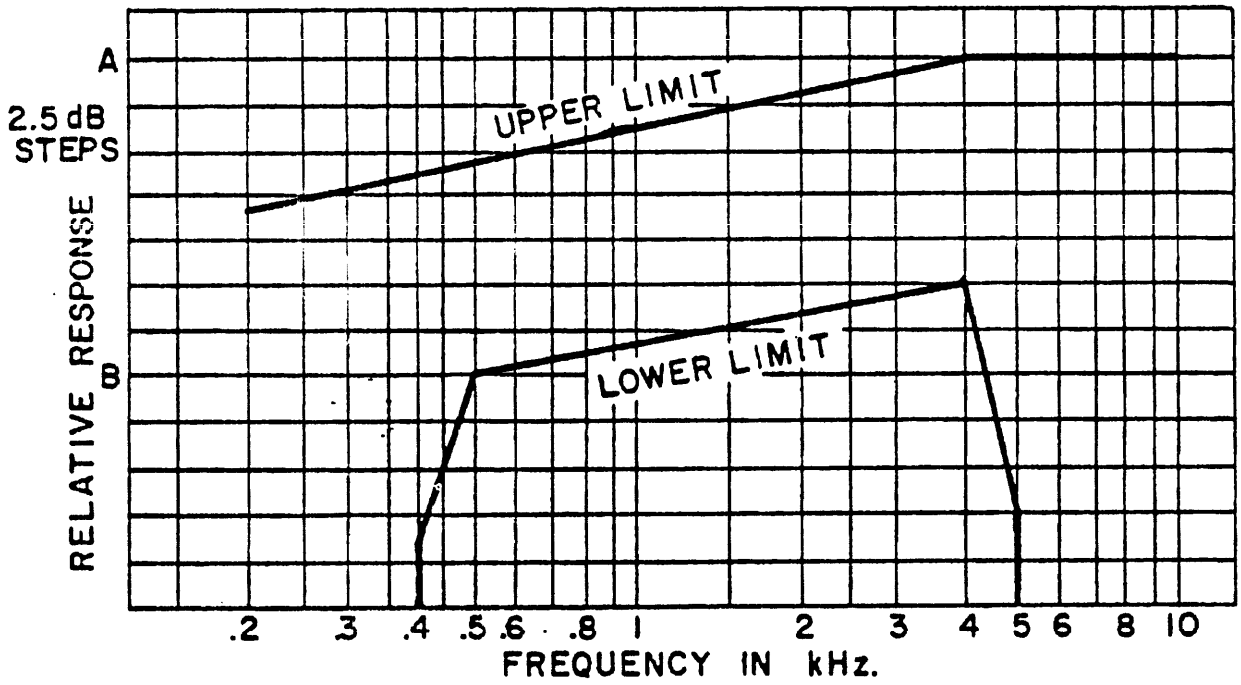


FIGURE 12. LOUDSPEAKER ASSEMBLY LS-517( )/UIH-6
FREQUENCY RESPONSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

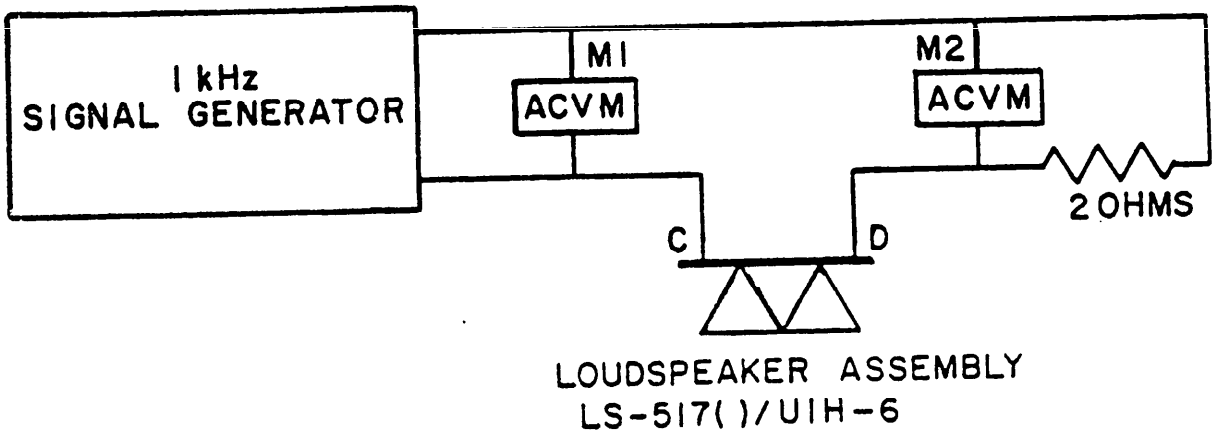


FIGURE 13. LOUDSPEAKER ASSEMBLY LS-517( )/UIH-6 IMPEDANCE TESTING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

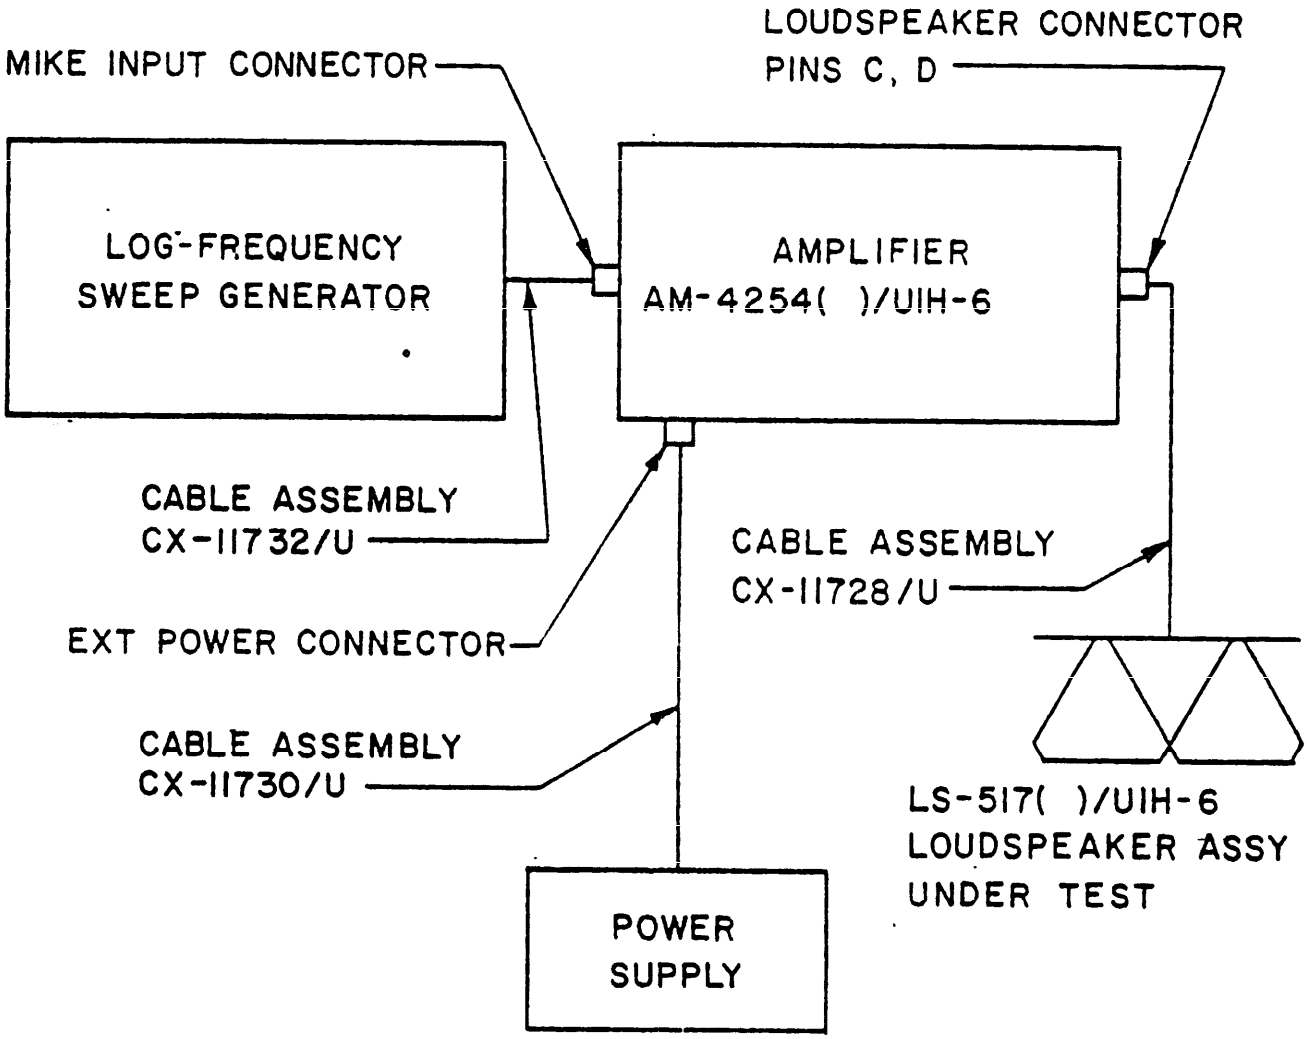


FIGURE 14

LOUDSPEAKER ASSY LS-517( )/UIH-6
ENDURANCE TEST

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

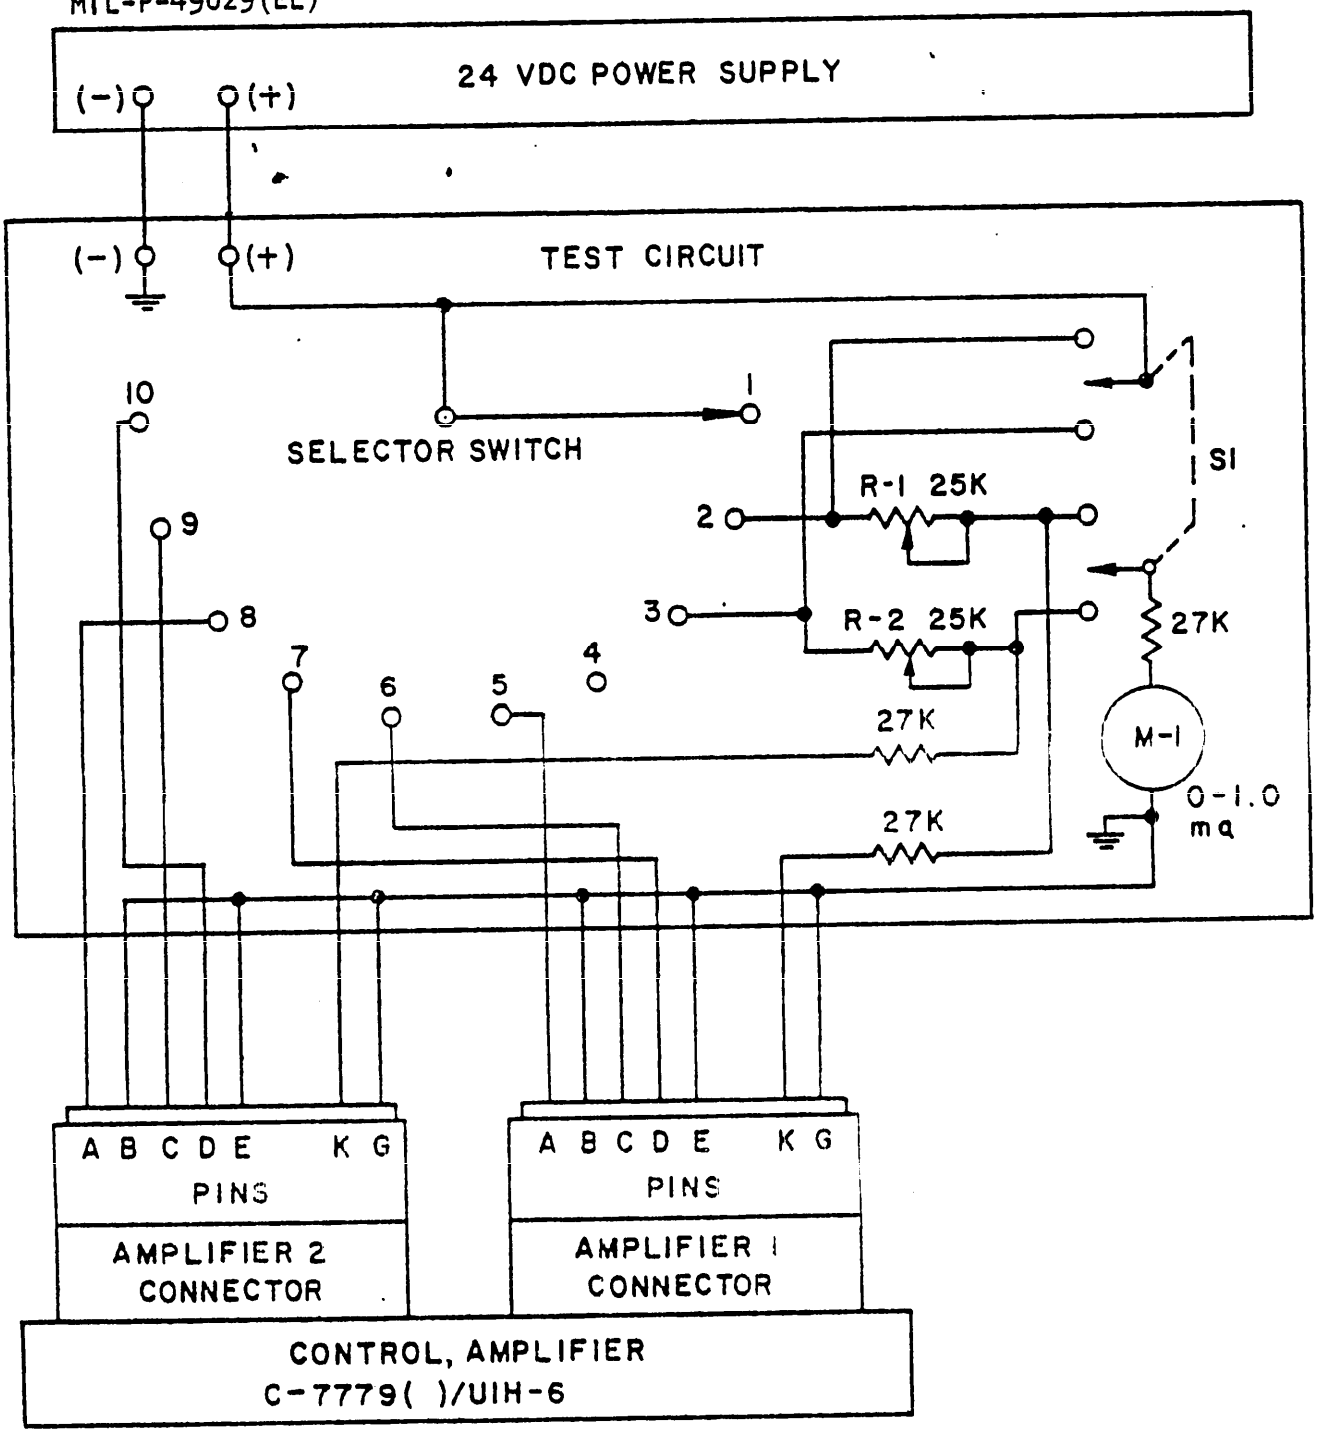


FIGURE 15

METER AND LAMP OPERATIONAL TEST
CONTROL, AMPLIFIER C-7779( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

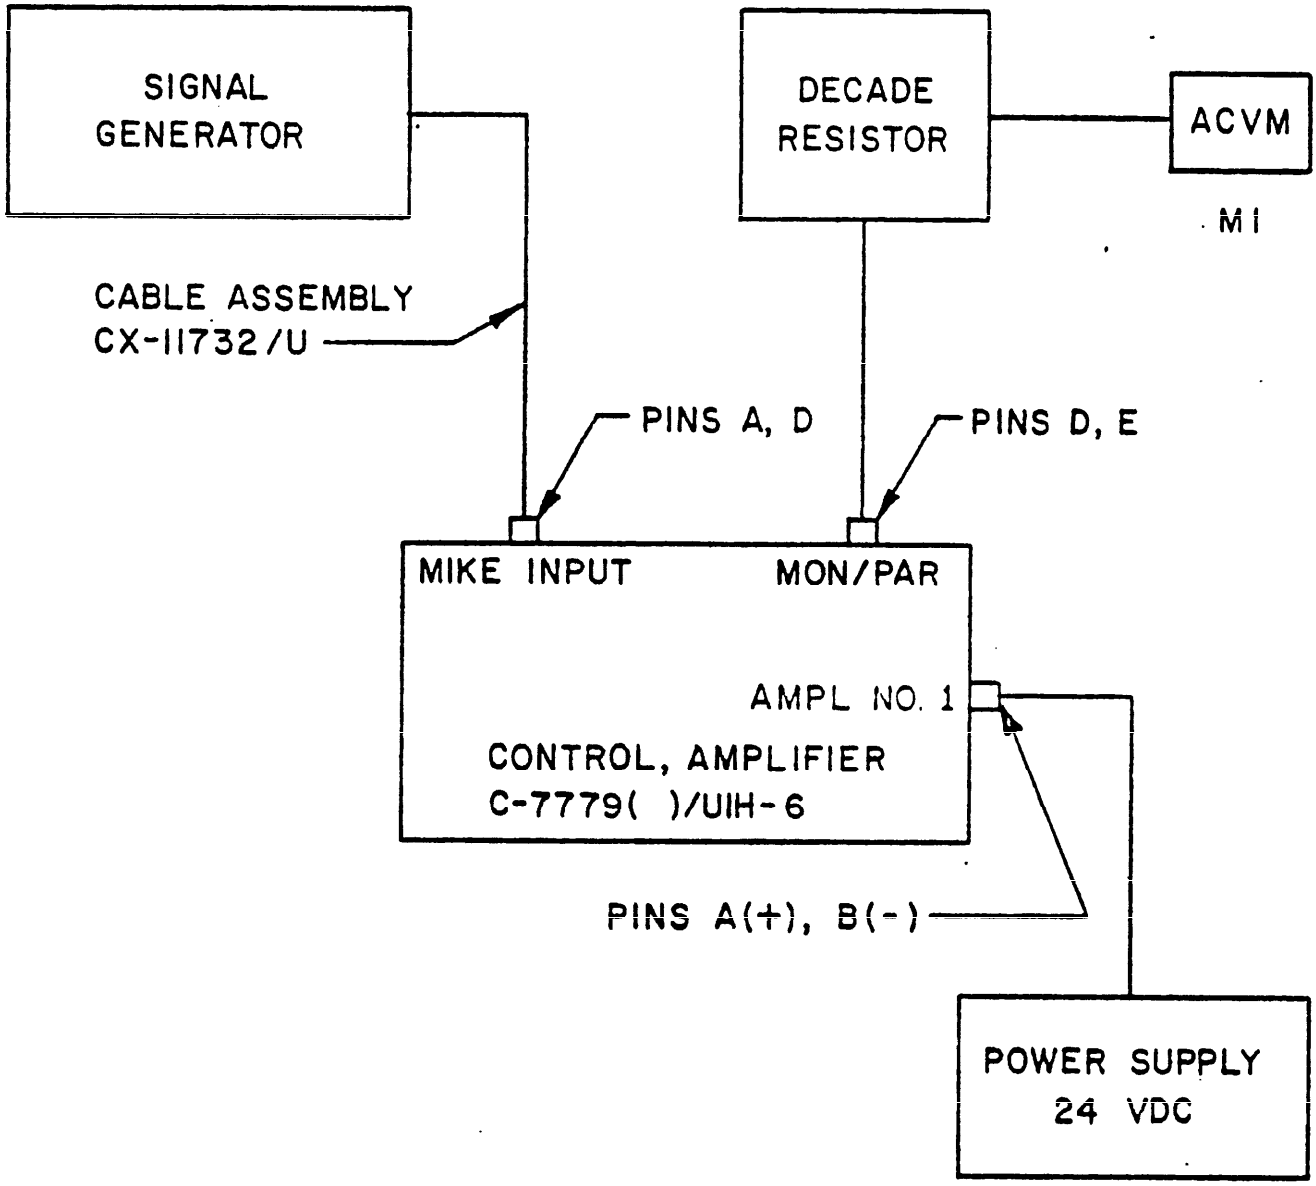


FIGURE 16

MON/PAR TEST CIRCUIT
CONTROL, AMPLIFIER C-7779( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

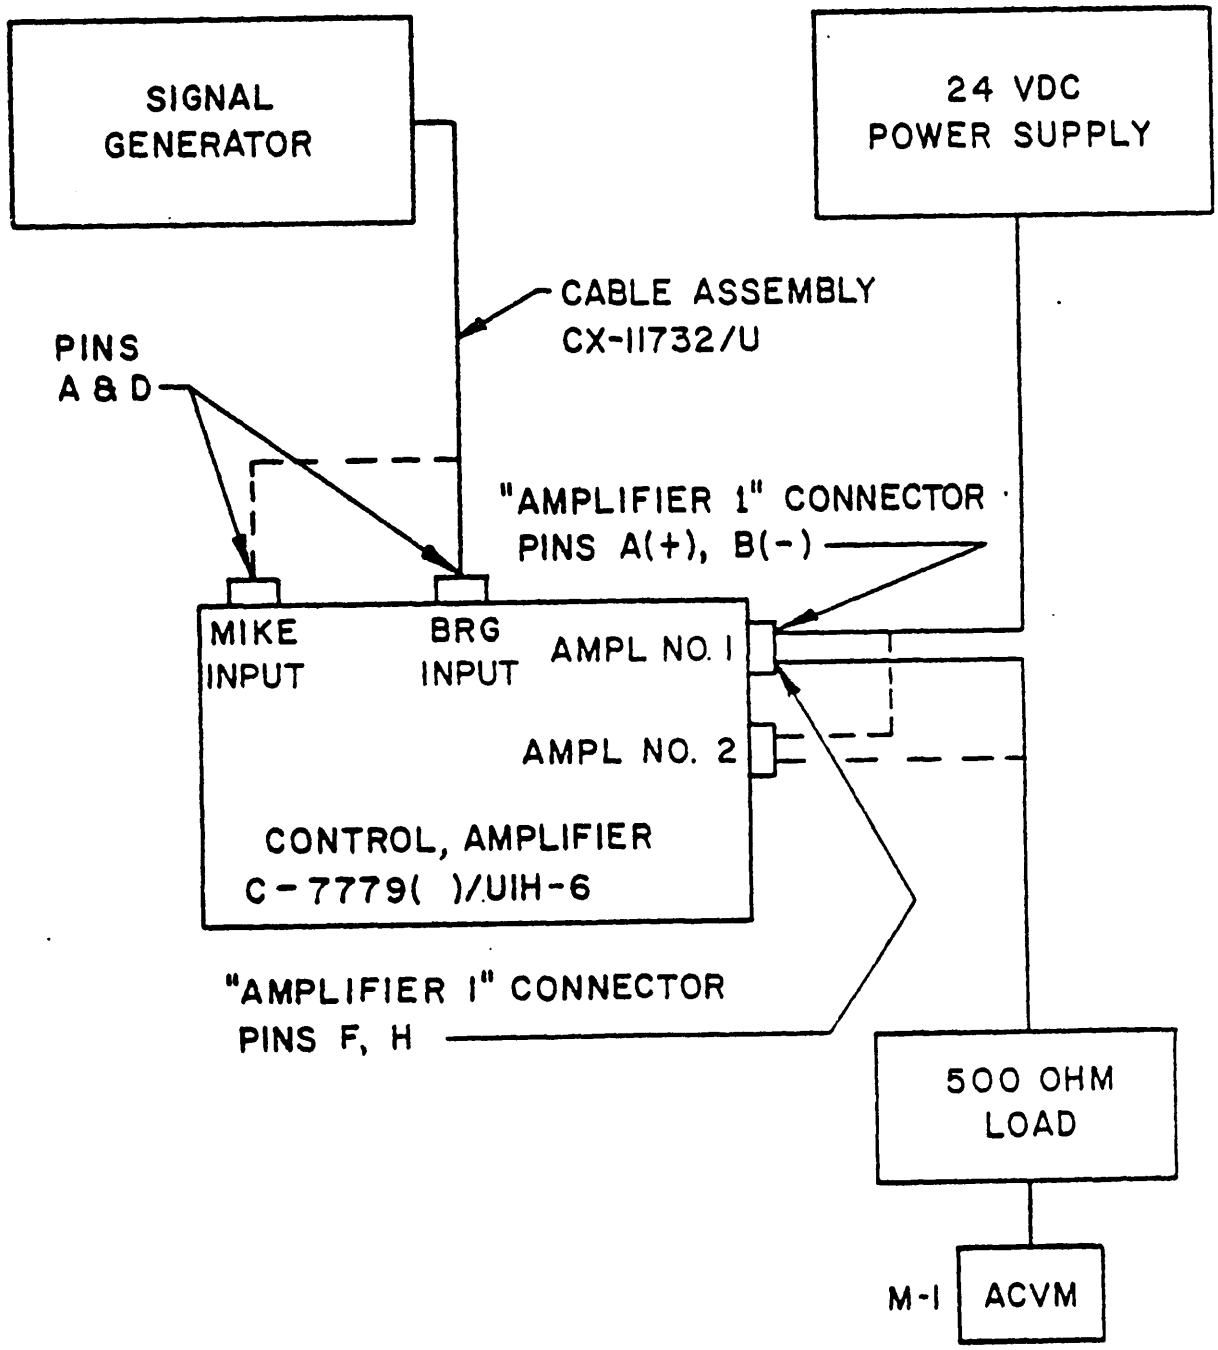


FIGURE 17

GAIN AND NOISE TESTS
CONTROL, AMPLIFIER C-7779( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.


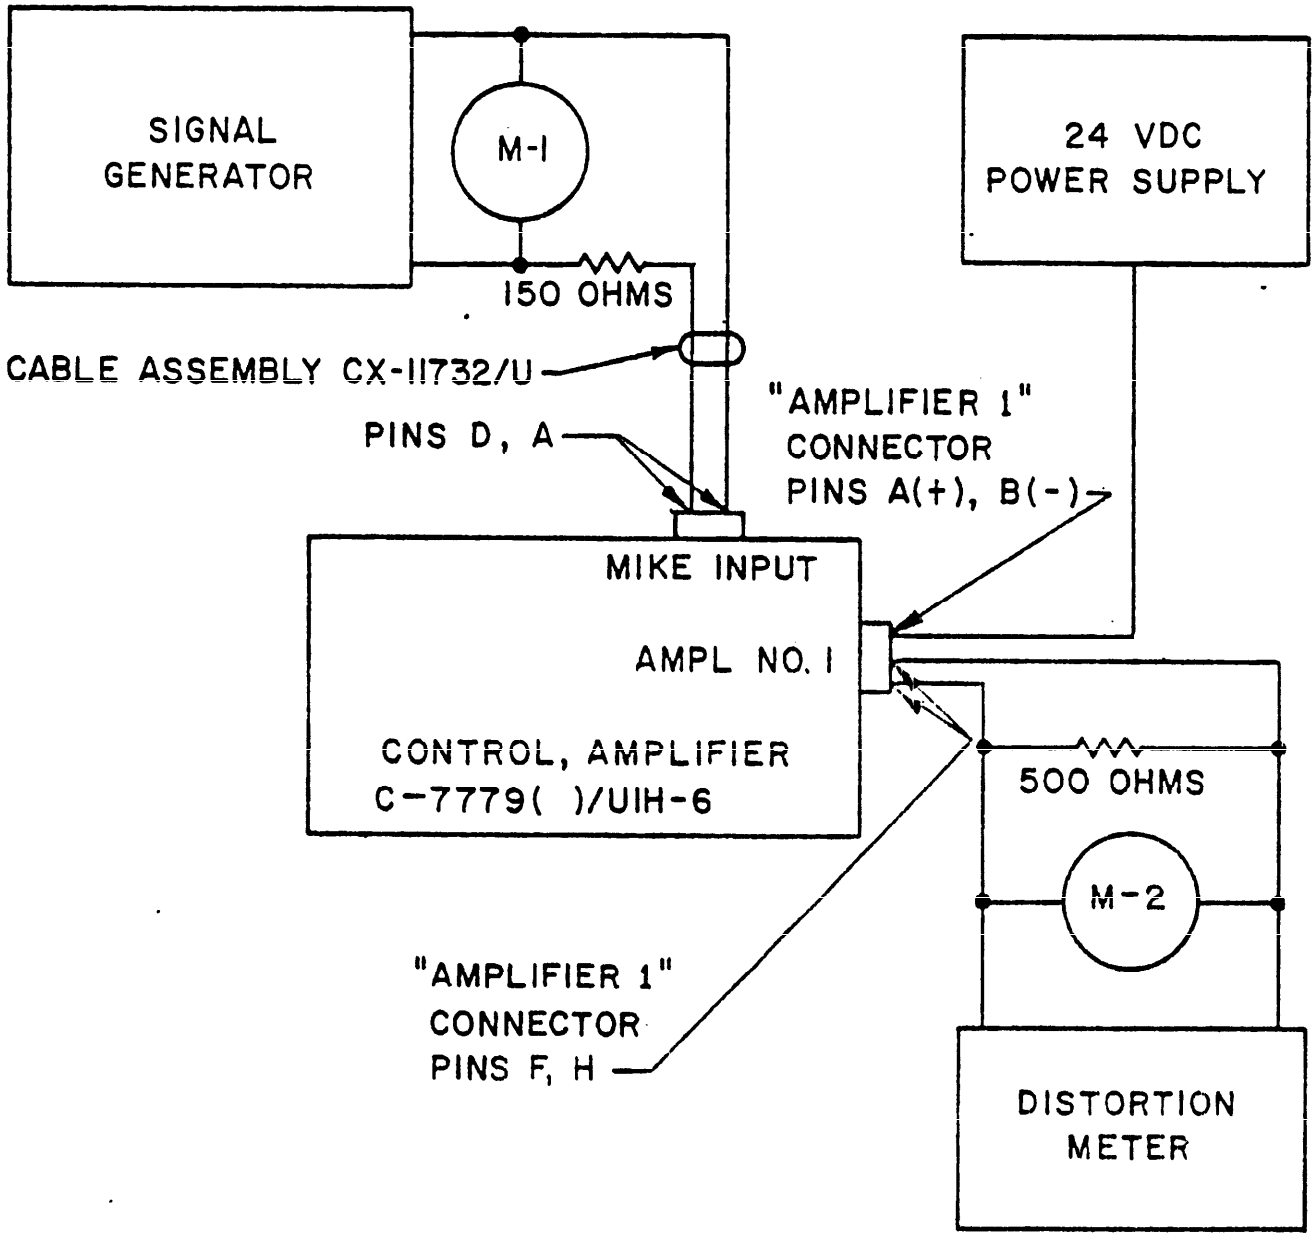


FIGURE 18

HARMONIC DISTORTION TEST
CONTROL, AMPLIFIER C-7779( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.


CAUTION: DURING TESTS USING THE LOUDSPEAKER, TEST PERSONNEL AND OTHER PERSONS IN THE VICINITY OF TEST AREA SHOULD TAKE ADEQUATE PRECAUTIONS AGAINST THE HIGH SOUND LEVEL WHICH CAN BE INJURIOUS.

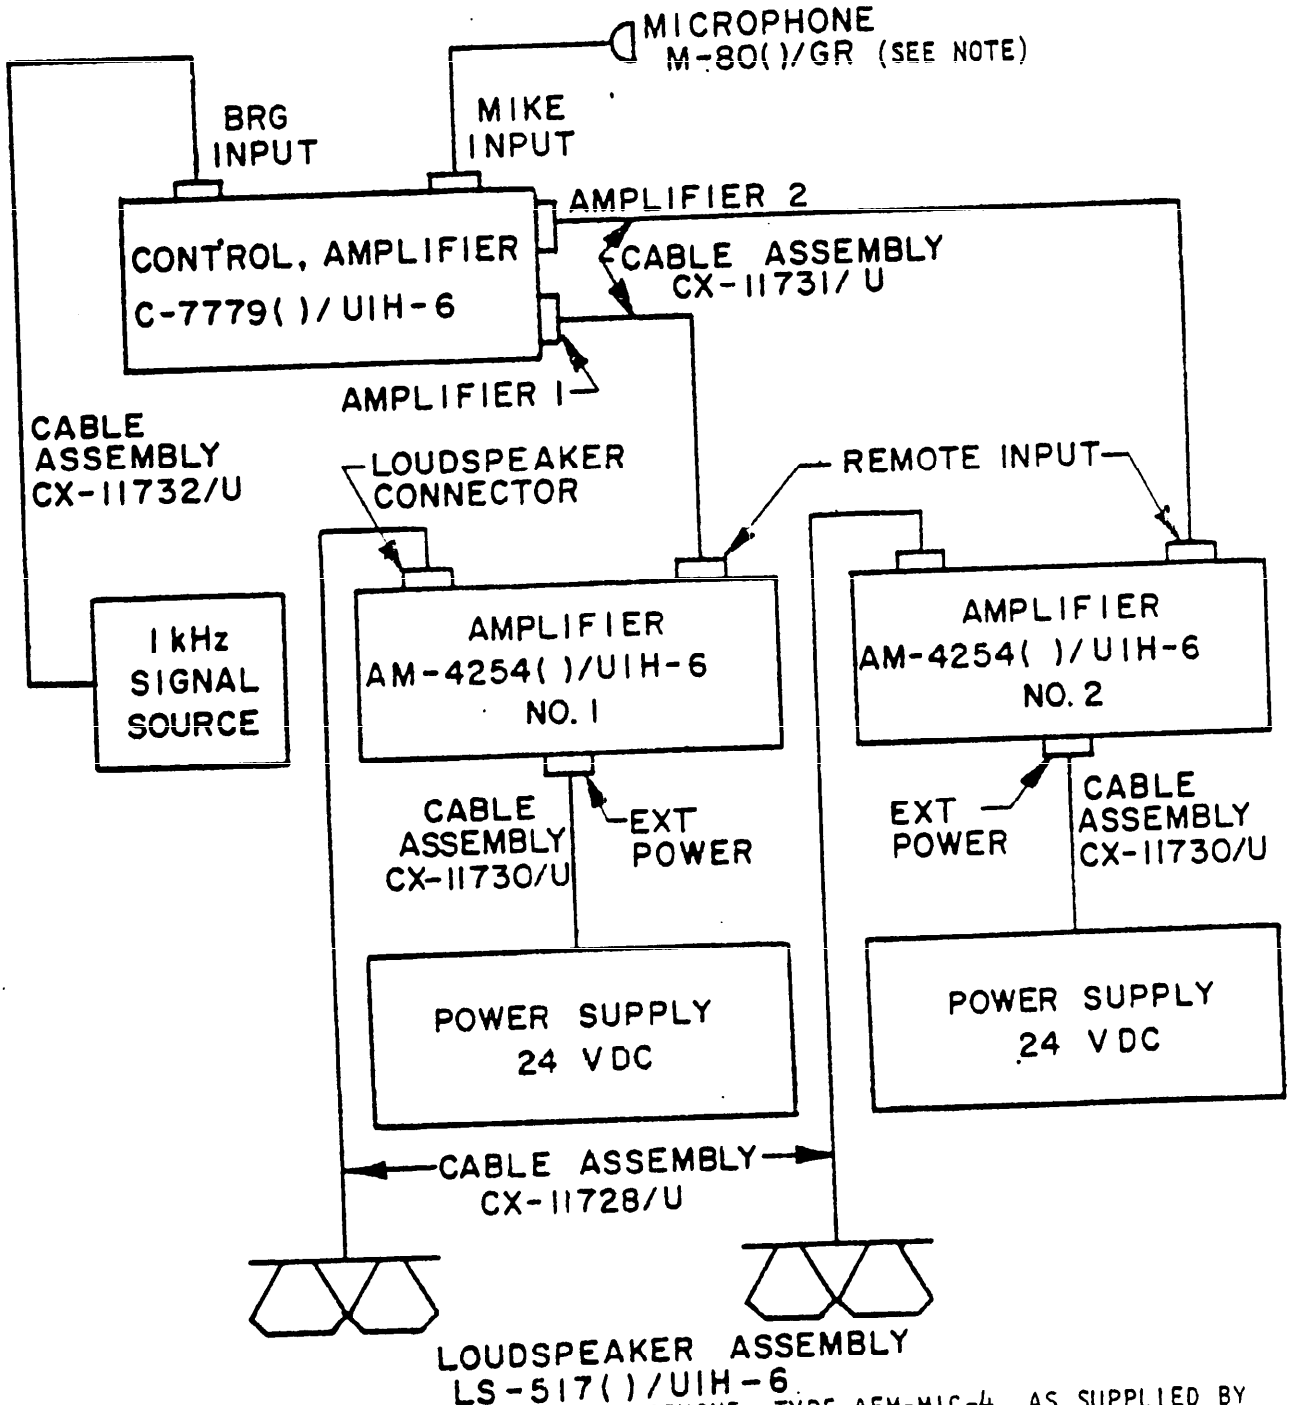

NOTE: FOR TESTING USE DYNAMIC MICROPHONE, TYPE AEM-MIC-4, AS SUPPLIED BY APPLIED ELECTRO MECHANICS, INC., ALEXANDRIA, VIRGINIA, OR EQUAL.

FIGURE 19. SYSTEM TEST DOUBLE AMPLIFIER SYSTEM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

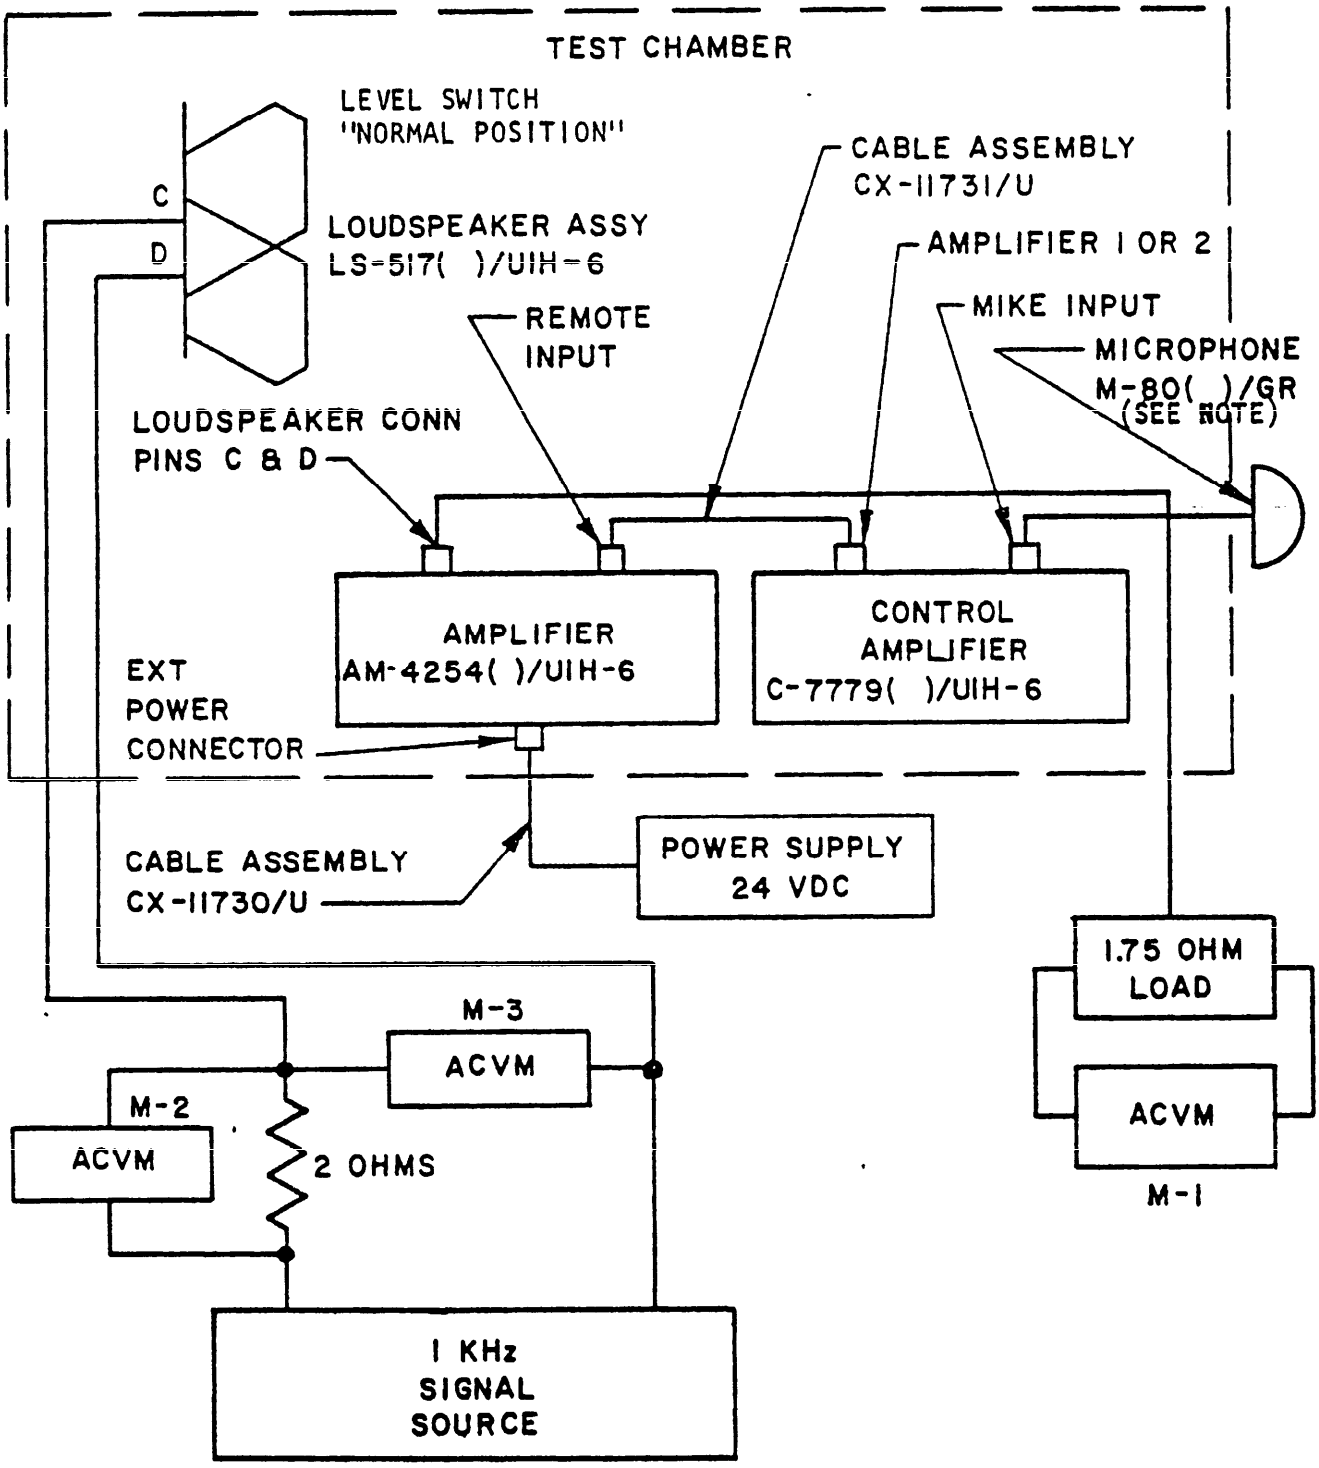

NOTE: FOR TESTING USE DYNAMIC MICROPHONE, TYPE AEM-MIC-4, AS SUPPLIED BY APPLIED ELECTRO MECHANICS, INC., ALEXANDRIA, VIRGINIA, OR EQUAL.

FIGURE 20

TEMPERATURE-ALTITUDE TEST SET-UP
RELATIVE HUMIDITY TEST SET-UP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.


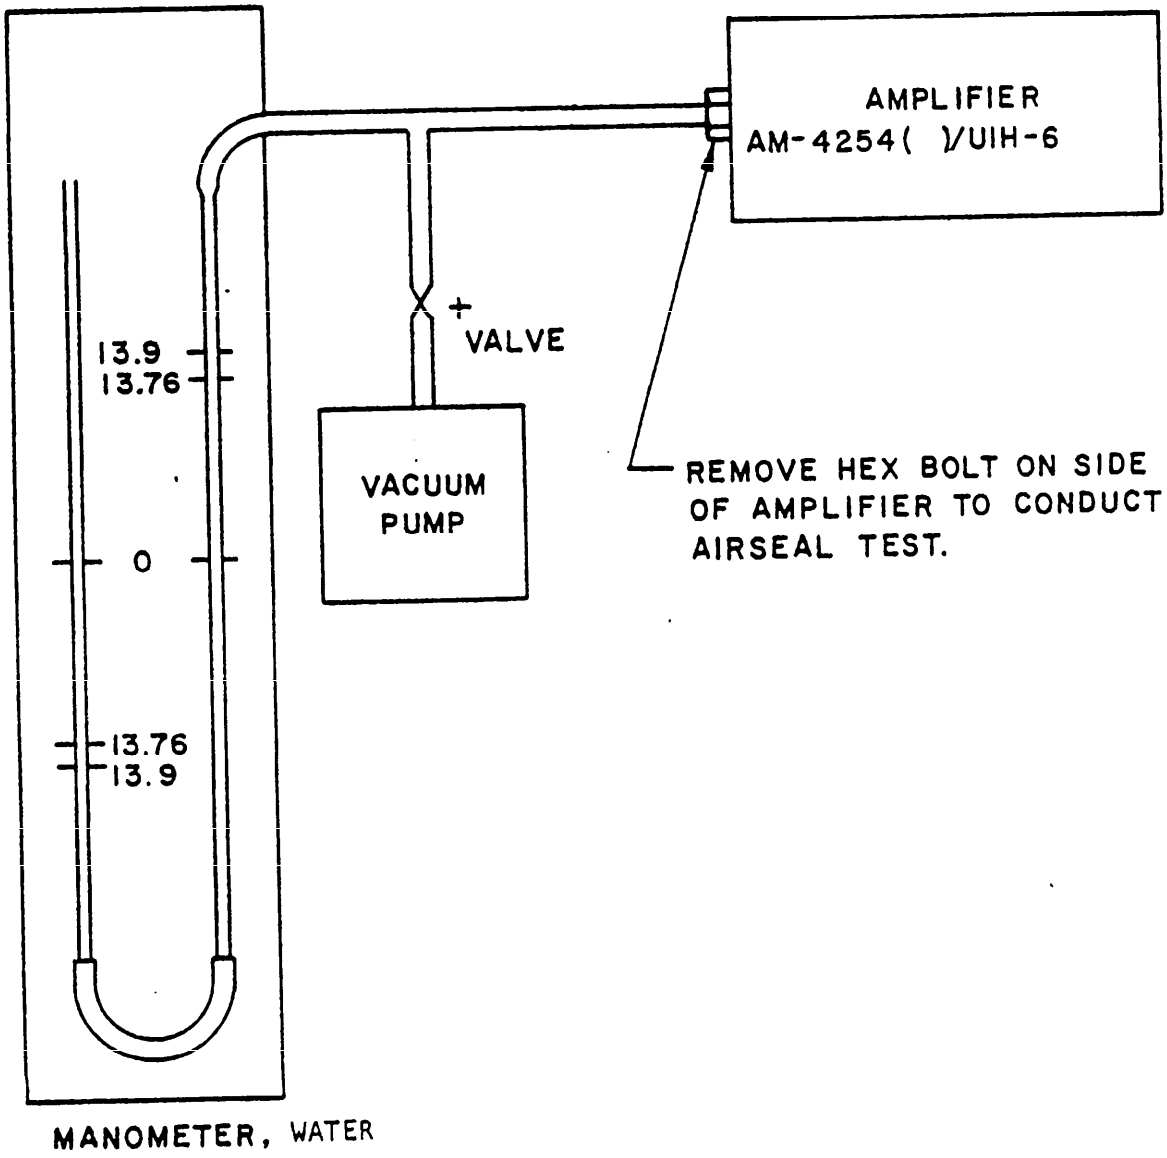


FIGURE 21

AIR SEAL TESTING

AMPLIFIER, A.F. AM-4254( )/UIH-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

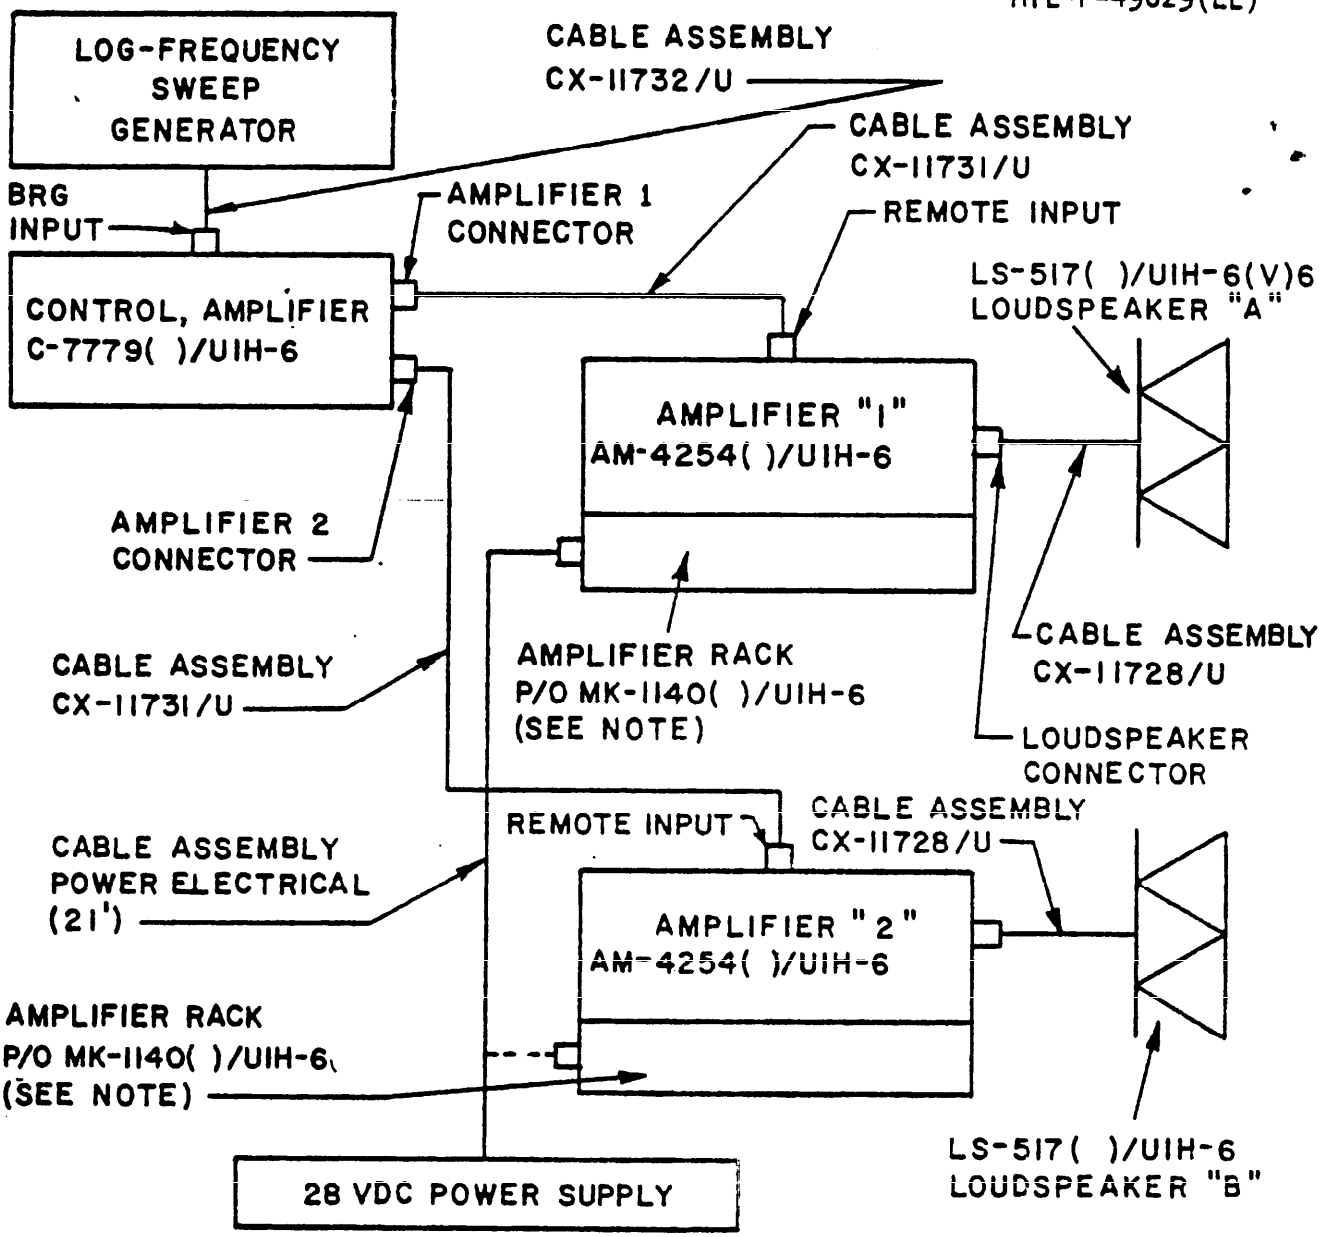

CAUTION:

DURING TESTS USING THE LOUDSPEAKER, TEST PERSONNEL AND OTHER PERSONS IN THE VICINITY OF THE TEST AREA SHOULD TAKE ADEQUATE PRECAUTION AGAINST THE HIGH SOUND LEVEL WHICH CAN BE INJURIOUS.

NOTE:

AMPLIFIERS 1 & 2 MOUNTED ON SAME AMPLIFIER RACK, PART OF MK-1140( )/UIH-6

FIGURE 22

RELIABILITY TESTING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-P-49029(EL) PUBLIC ADDRESS SET AN/UIH-6( ) (UNITS OF)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- RD-TS
Fort Monmouth, New Jersey 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.