MILITARY SPECIFICATION

SCANNER ASSEMBLY FOR AN/PAS-7

This specification is approved for use by USA Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the scanner assembly for Viewer, Infrared AN/PAS-7 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-71	- Pallet, Materials Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
QQ-S-781	- Strapping, Steel, Flat and Seals
PPP-B-585	- Boxes, Wood, Wirebound
PPP-B-601	- Boxes, Wood, Cleated-Plywood
PPP-B-621	- Boxes, Wood, Nailed and Lock Corner
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple Wall
PPP-C-843	- Cushioning Material, Cellulosic
PPP-F-320	- Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-S-760	- Strapping, Nonmetallic, (and Connectors)
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain for Sealing and Securing
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging Methods of
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-B-131	- Barrier Materials, Water Vaporproof, Flexible, Heat-Sealable
MIL-D-3464	- Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification
MIL-P-11268	- Parts, Materials, and Processes Used in Electronic Equipment
MIL-M-13231	- Marking of Electronic Items

STANDARDS

FEDERAL

FED-STD-356	- Commercial Packaging of Supplies and Equipment

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized and Containerized Unit Loads 40 Inch x 48 Inch Pallets, Skids, Runners, or Pallet Type Base
MIL-STD-171	- Finishing of Metal and Wood Surfaces
MIL-STD-252	- Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and Other Devices
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-810	- Environmental Test Methods

DRAWINGS

ELECTRONICS COMMAND

DL-SM-B-774006	- Scanner Assembly

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Item definition. The scanner assembly, one of the assemblies comprising the Viewer, Infrared AN/PAS-7 consists of a top and bottom bracket and associated hardware; a scan mirror and associated mechanical and electrical drive components; and master oscillator, horizontal sweep generator, and scanner motor drive circuitry.

3.2 First article. When specified the contractor shall furnish sample unit(s) for first article inspection and approval, (see 4.3 and 6.2).

3.3 Construction. The scanner assembly shall be constructed in accordance with the drawings, parts list and other documents listed on USAECOM Drawing List DL-SM-B-774006.

3.4 Material. Material shall be as specified herein and as shown on the applicable drawings. Material not specified, shall be selected by the contractor, shall be subject to all provisions of this specification and shall conform to MIL-P-11268.

3.5 Operational and environmental.

3.5.1 Master oscillator. The master oscillator shall generate two sine waves having a frequency of 185 Kilohertz (kHz), plus or minus 10 percent; one sine wave having an amplitude of 11 volts peak-to-peak, plus or minus 10 percent and the other sine wave having an amplitude of 40 volts peak-to-peak, plus or minus 10 percent.

3.5.2 Horizontal sweep generator. The horizontal sweep voltage shall be generated by modulating the 185 kHz, plus or minus 10 percent oscillator sine wave at the frequency of the scan mirror oscillation (see 3.5.3) and then demodulating to extract the sweep reference voltage. The signal shall be a triangular wave as illustrated in Figure 1.

3.5.3 Scanner mirror drive. On application of rated voltages to the scanner assembly, the scanning mirror shall start from rest in any attitude and oscillate at a rate of 7.5, plus 2, minus 0 Hz. With the scanning mirror oscillating in the azimuth direction, the mechanical excursion of the scanning mirror shall be 6°, plus 0° 40 minutes, minus 0° 0 minute.

3.5.4 Temperature.

3.5.4.1 Operating. Minus 32°C to plus 54°C.

3.5.4.2 Non-operating. Minus 62°C to plus 68°C.

3.5.5 Temperature shock. Minus 57°C, plus 0°C, minus 1.5°C to plus 68°C, plus 1.5°C, minus 0°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.5.6 Vibration. The scanner assembly shall withstand vibration displacement of 0.030 inch peak to peak minimum over a frequency range of 10 to 55 Hz.

3.6 Government furnished equipment. Unless otherwise specified in the contract or purchase order, there shall be no Government furnished equipment provided.

3.7 Treatment and painting. Unless otherwise specified, the metallic parts of the scanner assembly shall be given a treatment and painting per MIL-STD-171.

3.8 Marking. Unless otherwise specified, the scanner assembly shall be marked per MIL-M-13231.

3.9 Workmanship. Unless otherwise specified workmanship of the scanner assembly shall conform to Requirement 9, MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspections specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of preparation for delivery (see 4.7).

4.3 First article inspection.

4.3.1 Inprocess inspection prescribed by a specification or drawing. Each lot of components and subassemblies shall have all parameters examined for defects in conformance with the inspection plan in the applicable specification or on the drawing.

4.3.2 Inprocess inspection not prescribed by a specification or drawing. Each lot of components and subassemblies not prescribed by a specification or a drawing with a specific inspection plan shall have all parameters examined for defects in accordance with the sample plan tables of MIL-STD-105 with major defects (see 4.3.2.1) having an AQL of 1 percent defective combined and minor defects having AQL of 4 percent defective combined. General inspection level II shall be applicable to both sample plans.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.3.2.1 Classification of defects for inprocess inspection not prescribed by a specification or drawing.

MAJOR

101. Performance requirements specified in notes appearing on drawings.
102. Linear or diametral tolerances of 0.002 inch or less.
103. Angular dimensions having a tolerance of 15 minutes of arc or less.
104. Machine finishes of 32 micro-inches RMS or finer.
105. Tolerances of position or form 0.002 inch or less.
106. Screw thread Class 3 or better.
107. Load requirements for springs.
108. Lubrication requirements including dry lubricant finishes.

MINOR

Defects not listed as major shall be classified as minor.

4.3.3 Examination. Each assembled scanner assembly shall be examined for defects in accordance with Table I. One or more defects shall be cause for rejection.

TABLE I. Examination.

Inspection	Requirement paragraph	Inspection criteria
Any part or component missing or damaged	3.3, 3.4	MIL-STD-252
Treatment and painting not as specified	3.7	MIL-STD-171
Markings not as specified or illegible	3.8	MIL-M-13231
Workmanship not as specified	3.9	MIL-STD-454

4.3.4 Tests. Upon successful completion of the inprocess inspection and assembled examination specified in 4.3 the first article scanner assembly shall be subjected to the tests in Table II. Tests shall be conducted in the order listed. Failure of any test shall constitute first article failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Master oscillator	3.5.1	4.6.1
Horizontal sweep generator	3.5.2	4.6.2
Scanner mirror drive	3.5.3	4.6.3
Temperature-operating	3.5.4.1	4.6.4
Temperature-non-operating	3.5.4.2	4.6.4
Temperature shock	3.5.5	4.6.5
Vibration	3.5.6	4.6.6

4.4 Quality conformance inspection.

4.4.1 Inprocess inspection. Inprocess inspection on the scanner assembly shall be as specified in 4.3.1 and 4.3.2.

4.4.2 Examination. Each assembled scanner assembly shall be examined as specified in Table I. Presence of one or more defects shall be cause for rejection of that scanner assembly.

4.4.3 Tests.

4.4.3.1 Group A inspection. Following successful completion of the inprocess inspection and assembly examination of 4.4.1 and 4.4.2, each scanner assembly shall be tested in accordance with Table III in the order listed. Failure of any test shall be cause for rejection of that unit.

TABLE III. Group A inspection.

Inspection	Requirement paragraph	Test paragraph
Master oscillator	3.5.1	4.6.1
Horizontal sweep generator	3.5.2	4.6.2
Scanner mirror drive	3.5.3	4.6.3

4.4.3.2 Group B inspection. Group B inspection shall be conducted on scanner assemblies selected from units which have passed the tests in 4.4.3.1. Sampling of lots shall be in accordance with MIL-STD-105, AQL 2.5 percent defective, inspection level S-3 combined. Tests shall be conducted in accordance with Table IV, and shall be performed in the order listed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE IV. Group B inspection.

Inspection	Requirement paragraph	Test paragraph
Temperature operating	3.5.4.1	4.6.4
Temperature non-operating	3.5.4.2	4.6.4
Temperature shock	3.5.5	4.6.5
Vibration	3.5.6	4.6.6
Master oscillator	3.5.1	4.6.1
Horizontal sweep generator	3.5.2	4.6.2
Scanner mirror drive	3.5.3	4.6.3

4.4.3.3 Reinspection of Group B sample units. Unless otherwise specified sample units which have been subjected to and passed Group B inspection may be accepted on contract or order provided all damage is repaired and the units are resubjected to and pass Group A inspection.

4.4.3.4 Group C inspection. Not applicable.

4.5 Test methods. Tests required to determine compliance with the requirements of this specification shall be conducted in accordance with the test procedures specified herein. Unless otherwise specified all tests shall be run at 23°C.

4.6 Operational and environmental.

4.6.1 Master oscillator. With the scanner assembly electrical circuits energized, the amplitude and frequency of the sine wave generated by the master oscillator shall be measured using an oscilloscope. Failure to comply with the requirement of 3.5.1 shall constitute a failure of this test.

4.6.2 Horizontal sweep generator. With the scanner assembly electrical circuits energized and the scanning mirror oscillating at the frequency and excursion in 3.6.3, the output of the horizontal sweep demodulator shall be observed with an oscilloscope. Failure to comply with the requirement of 3.5.2 shall constitute a failure of this test.

4.6.3 Scanner mirror drive. With rated voltages applied to the scanner assembly electrical circuits, it shall be observed whether the scanning mirror starts to oscillate. The scanner assembly shall be rotated into various attitudes, rated voltages applied in each attitude, and the scanning mirror observed to determine if it starts oscillating. With the rated voltage applied to the scanner assembly electrical circuits and the scanning mirror oscillating in various attitudes, the frequency of the input voltages to the scanner motor shall be measured using an oscilloscope. This

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

frequency is the oscillating frequency of the scanning mirror. Remove rated voltages from the scanner assembly. The scanner assembly shall be clamped to a horizontal stationary surface (see Figure 2). A scale calibrated in inches, accurate to 0.1 inch, and 36 inches in length shall be oriented so that the scale is in a horizontal plane and normal to an imaginary line joining the midpoint of the scale with the center of the scanning mirror. The distance (d) between the scale and the scanning mirror shall be adjusted to 11 feet, plus or minus 0.25 inch. With the scanning mirror stopped at its center of scan position, a telescope, with a vertical crosshair, shall be oriented in a horizontal plane and aimed at the scanning mirror so that the center of the vertical cross hair is aligned with the center of the scale. Rated voltages shall be applied to the scanner assembly. With the scanning mirror oscillating, the vertical cross hair will appear to sweep back and forth along the scale. The end points of the apparent travel of the vertical cross hairs along the scale shall be noted and the distance between these points shall be measured. The distance between these points shall be within the range of 25.4 to 28.3 inches. (NOTE: Distances of 25.4 inches and 28.3 inches are equivalent to angles of 6° and 6° 40 minutes respectively). Failure to comply with the requirement of 3.5.3 shall constitute a failure of this test.

4.6.4 Temperature.

4.6.4.1 High temperature. The scanner assembly shall be subjected to test in accordance with Method 501, Procedure I of MIL-STD-810. Temperature for Step 2 shall be plus 68°C. Temperature for Step 4 shall be plus 49°C. Failure to operate or pass inspection of MIL-STD-810 shall constitute a failure of this test.

4.6.4.2 Low temperature. The scanner assembly shall be subjected to test in accordance with Method 502, Procedure I of MIL-STD-810. The temperature for Step 2 shall be minus 62°C and shall be maintained until temperature stabilization of the test item is reached. The temperature for Step 4 shall be minus 32°C. Failure to operate or pass inspection of MIL-STD-810 shall constitute failure of this test.

4.6.5 Temperature shock. The scanner assembly shall be subjected to test in accordance with Method 503, Procedure I of MIL-STD-810. The maximum temperature for Steps 1 and 4 shall be plus 68°C. Failure to operate or pass inspection of MIL-STD-810 shall constitute a failure of this test.

4.6.6 Vibration. The scanner assembly shall be operated under standard ambient conditions and a record made of all data necessary to determine compliance with required performance. These data shall provide the criteria for checking operational requirements of the scanner assembly at the conclusion of the vibration test. The scanner assembly shall be subjected to a simple harmonic motion having a vibratory displacement of 0.030 inch

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

minimum peak to peak, with the frequency being changed in discrete steps of 1 Hz and maintained at least 10 seconds at each frequency over the frequency range of 10 to 55 Hz. Failure to operate shall constitute failure of this test.

4.7 Inspection of preparation for delivery. Preparation for delivery shall be inspected in accordance with MIL-P-116 to determine compliance to requirements of Section 5.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A, B or Commercial, as specified (see 6.2).

5.1.1 Level A, maximum military protection.

5.1.1.1 Cleaning. Scanner assembly - Part of Viewer, Infrared AN/PAS-7 shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Scanner assembly - Part of Viewer, Infrared AN/PAS-7 shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application. None required.

5.1.1.4 Unit packaging. Unit packaging shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical literature. Each technical literature shall be packaged method IC-1.

5.1.1.4.2 Scanner assembly - Part of Viewer, Infrared AN/PAS-7. Each unit shall be individually packaged method IIc as follows: Wrap each item individually with material conforming to MIL-B-121, type II. Cushion each wrapped item with material conforming to PPP-C-843, type II, 1/4 inch in thickness. Place desiccant, conforming to MIL-D-3464 in the amount specified in MIL-P-116, on top of the wrapped item. Place the cushioned item within a barrier bag fabricated of material conforming to MIL-B-131, class 2, with sufficient allowance in one direction to permit two subsequent resealings. Heat seal the closure, leaving a small opening for exhausting air. Exhaust the entrapped air and complete the seal. Place the sealed bag with contents within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Cover any interior stapling or stitching of the box with tape conforming to PPP-T-45. Place the technical literature, packaged as specified in 5.1.1.4.1, on top of the contents, directly under the lid of the box. Close the box in accordance withe appendix of the box specification.

5.1.2 Level B, minimum military protection.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

5.1.2.1 Cleaning, drying and preservation application. Each scanner assembly - Part of Viewer, Infrared AN/PAS-7 shall be cleaned, dried and preserved as specified in 5.1.1.1 through 5.1.1.3.

5.1.2.2 Unit packaging. Each scanner assembly - Part of Viewer, Infrared AN/PAS-7 shall be individually packaged method IA-8 as follows: Wrap each item individually with material conforming to MIL-B-121, type II. Cushion each wrapped item with material conforming to PPP-C-843, type II, 1/4 inch in thickness. Place the cushioned item within a barrier bag fabricated of material conforming to MIL-B-131, class 2. Heat seal the closure, leaving a small opening for exhausting air. Exhaust the entrapped air and complete the seal. Place the sealed bag with contents within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Cover any interior stapling or stitching of the box with tape conforming to PPP-T-45. Place the technical literature, packaged as specified in 5.1.1.4.1, on top of the contents, directly under the lid of the box. Close the box in accordance with the appendix of the box specification.

5.1.3 Commercial packaging. Commercial packaging shall be in accordance with FED-STD-356.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A, maximum military protection. A quantity of scanner assembly-Part of Viewer, Infrared AN/PAS-7, packaged as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. A quantity of the containers shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

5.2.1.1 Palletization. Palletization shall be required when: containers specified in 5.2.1 do not require skids; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers, packed as specified in 5.2.1, except that container strapping may be omitted, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall be softwood conforming to NN-P-71, type IV, size 2. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A or shrink film.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

5.2.2 Level B, minimum military protection. A quantity of scanner assembly Part of Viewer, Infrared AN/PAS-7, packaged as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-636, type CF, class weather-resistant. Box closure shall be as specified in the appendix of the box specification. A quantity of the containers shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant, variety DW. The gross weight of boxes conforming to PPP-B-640, shall not exceed 250 pounds. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, type IV. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or non-metallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification.

5.2.2.1 Palletization. Palletization shall be required when: containers specified in 5.2.2 do not require pallet mounting; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers, packed as specified in 5.2.2, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall be softwood conforming to NN-P-71, type IV, size 2. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A or shrink film.

5.2.3 Commercial packing. Commercial packing shall be in accordance with FED-STD-356.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial marking. In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with FED-STD-356.

6. NOTES

6.1 Intended use. On the application of rated voltages, the scanner assembly shall provide mechanical scanning in the azimuth direction through an included angle of 6°, plus 0° 40 minute, minus 0° 0 minute. The scanner assembly is designed specifically for use as part of Viewer, Infrared, AN/PAS-7.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Levels of preservation-packaging and packing required (see 5.1 and 5.2).
c. When first article tests are to be conducted and the number of first article units (see 3.2, 4.3 and Table II). Time frame required for submission of first article test reports and time frame required for approval of first article test reports by the contracting officer.

6.3 Definitions.

6.3.1 Room temperature. Room temperature is defined as +23°C, ±3°C.

Custodian:
Army - EL

User activity:
Army - MU

Preparing activity:
Army - EL

Project No. (5855-A115)

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.


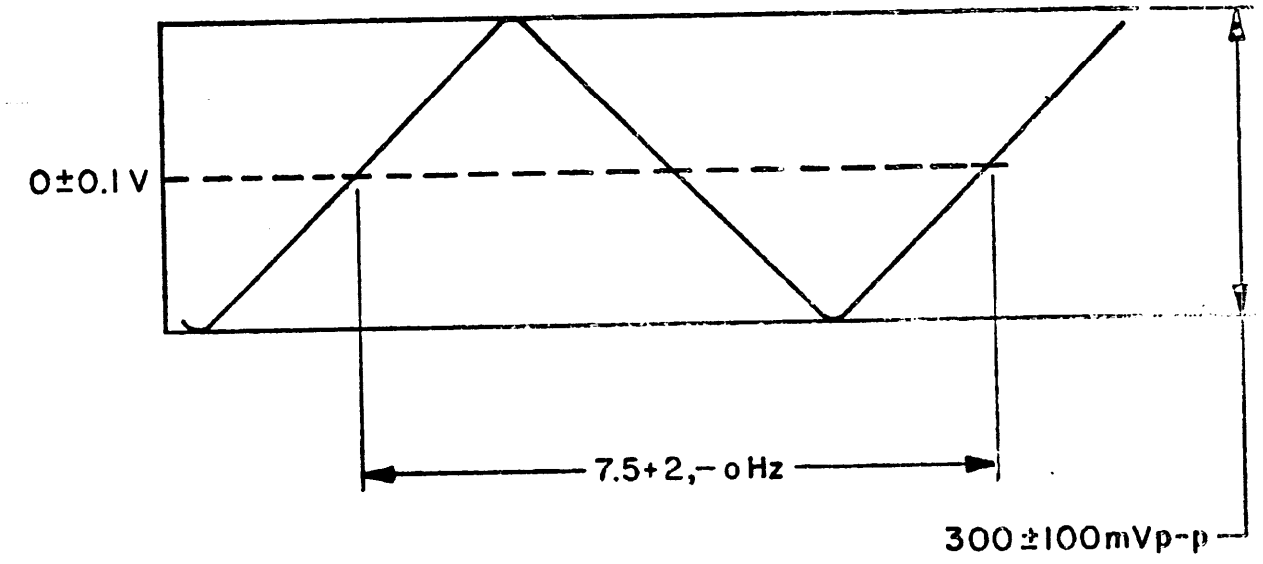


FIGURE 1. HORIZONTAL SWEEP VOLTAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

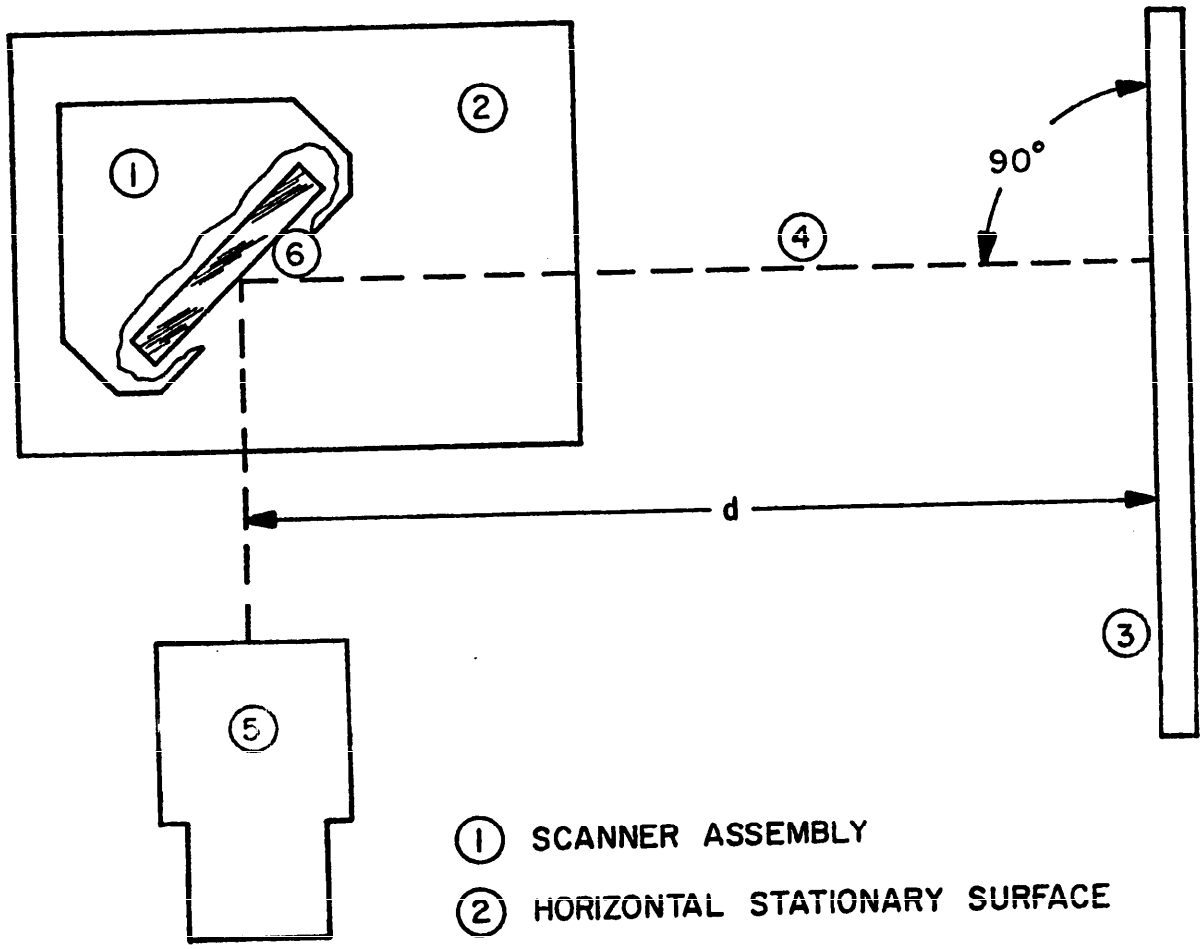

1. SCANNER ASSEMBLY
2. HORIZONTAL STATIONARY SURFACE
3. CALIBRATED SCALE
4. IMAGINARY LINE
5. TELESCOPE
6. SCANNING MIRROR

FIGURE 2
SCANNER MOTOR DRIVE TEST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-S-49087(EL) SCANNER ASSEMBLY FOR AN/PAS-7

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-PM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:58Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: XXXXXXX DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.