MILITARY SPECIFICATION

VIEWER, INFRARED
AN/PAS-7

This specification is approved for use by US Army Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the Viewer, Infrared, AN/PAS-7, (See 6.1).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposals, form a part of this specificaiton to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-71	- Pallet, Materials Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
QQ-S-781	- Strapping, Steel, Flat and Seals
PPP-B-585	- Boxes, Wood, Wirebound
PPP-B-601	- Boxes, Wood, Cleated-Plywood
PPP-B-621	- Boxes, Wood, Nailed and Lock Corner
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple Wall
PPP-F-320	- Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-S-760	- Strapping, Nonmetallic, (and Connectors)
PPP-T-97	- Tape, Pressure-Sensitive Adhesive, Filament Reinforced

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:58Z
Check the source to verify that this is the currentversion before use.

MILITARY

MIL-P-116	- Preservation-Packaging Methods of
MIL-P-11268	- Parts, Materials, and Processes Used in Electronic Equipment
MIL-M-13231	- Marking of Electronic Items
MIL-P-19644	- Plastic Molding Material (Polystyrene Foam, Expanded Bead)
MIL-P-26514	- Polyurethane Foam, Rigid or Flexible for Packaging
MIL-E-49084	- Eyepiece Assembly for AN/PAS-7
MIL-C-49085	- Charger, Battery PP-7311/PAS-7
MIL-O-49086	- Objective Lens Assembly for AN/PAS-7
MIL-S-49087	- Scanner Assembly for AN/PAS-7
MIL-D-49088	- Detector/Cooler Assembly for AN/PAS-7

STANDARDS

FEDERAL

FED-STD-356	- Commercial Packaging of Supplies and Equipment

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized and Containerized Unit Loads 40 Inch x 48 Inch Pallets, Skids, Runners, or Pallet Type Base
MIL-STD-171	- Finishing of Metal and Wood Surfaces
MIL-STD-252	- Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and Other Devices
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-461	- Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	- Electromagnetic Interference Characteristics, Measurements of
MIL-STD-781	- Reliability Tests: Exponential Distribution
MIL-STD-810	- Environmental Test Methods

DRAWINGS

ELECTRONICS COMMAND

DL-SM-B-774001	- Viewer, Infrared AN/PAS-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, and drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE

ANSI
Z24:10-1952 - Octave Band Filter Sets

(Applications for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, N.Y. 10018.)

3. REQUIREMENTS

3.1 Description. The Viewer, Infrared, AN/PAS-7, hereinafter referred to as the AN/PAS-7, shall be a light weight, handheld and tripod mounted, battery powered passive infrared thermal imaging system for use by personnel of reconnaissance and combat elements. It shall produce a recognizable image (see 6.3) from the emitted radiation (within the 3 to 5 micron spectral range) of military targets such as, a standing soldier. The AN/PAS-7 shall use mechanical scan principles to optically scan a rectangular field of view. A linear array of lead selenide (PbSe) detectors shall be cooled thermoelectrically to obtain proper detector sensitivity. The cooled detectors shall convert the infrared radiation received by the optical system into electrical signals. After amplification and multiplexing of the signals the resultant processed electrical signals shall be used to produce a real-time visible image on a cathode ray tube display. The image is viewed through a monocular eyepiece at the rear of the Viewer, Infrared SU-85/PAS-7, hereinafter known as the viewer. The AN/PAS-7 consists of the following major components: Viewer, Charger, Battery PP-7311/PAS-7; Case, Battery Power Supply CY-7537/PAS-7, Cable Assembly; Case, Viewer, Infrared SU-85/PAS-7, and Case, Transit.

3.2 First Article. When specified (see 6.2) the contractor shall furnish sample unit(s) for first article inspection and approval, (see 4.3).

3.3 Construction. The AN/PAS-7 shall be constructed in accordance with DL-SM-B-774001, and as specified herein.

3.4 Material. Material shall be as specified herein and as shown on the applicable drawings. Material not specified, shall be selected by the contractor, shall be subject to all provisions of this specification and shall conform to MIL-P-11268.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3.5 Major components. The following components shall be constructed in accordance with applicable drawings, specifications and as specified herein.

3.5.1 Detector/Cooler assembly. The detector/cooler assembly shall meet the requirements of MIL-D-49088.

3.5.2 Objective lens assembly. The objective lens assembly shall meet the requirements of MIL-O-49086.

3.5.3 Eyepiece assembly. The eyepiece assembly shall meet the requirements of MIL-E-49084.

3.5.4 Scanner assembly. The scanner assembly shall meet the requirements of MIL-S-49087.

3.5.5 Charger, Battery PP-7311/PAS-7. The Charger, Battery PP-7311/PAS-7 shall meet the requirements of MIL-C-49085.

3.6 Operational and environmental.

3.6.1 Burn-in. Each viewer delivered under contract shall have accumulated a minimum of 24 hours operation under the conditions of the burn-in procedure of paragraph 4.6.1.

3.6.2 Field-of-view. The field-of-view of the viewer shall be 6°, plus 0.9°, minus 0.3° vertical and 12°, plus 1.8°, minus 0° horizontal.

3.6.3 Resolution. The resolution of the viewer shall be not greater than 2.0 milliradian (mr) horizontal by 2.0 mr vertical.

3.6.4 Minimum resolvable temperature difference (MRT). The MRT (see 6.3) shall have the following minimum values over the central 50 percent of the field of view:

Target frequency (±10%) (cycles/milliradian)	Maximum difference from ambient temperature degrees celsius (°C)
0.10	0.23
0.15	0.33
0.20	0.53
0.25	1.06
0.30	3.0
0.35	18.0

3.6.5 Noise equivalent temperature difference (NET). The NET shall be no greater than +0.18°C in a minimum of 46 channels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.6.5.1 Dead and noisy channels. The number of inactive channels and/or channels whose electronic NET exceeds 0.18°C shall not be greater than two.

3.6.6 Optical transfer function (OTF). The modulation transfer function (MTF) and the phase transfer function (PTF) shall satisfy the following inequalities over the central 25 percent field of view minimum in the scan direction:

$$MTF(f) \geq \exp(-2\pi^2\tau^2 f^2) \text{ for } 0<f<f_\infty$$

$$PTF(f) \leq \text{phi for } 0<f<f_\infty$$

where: f_∞ = the spatial frequency in cycles/milliradian referenced to object plane spatial frequencies.

$f_\infty = \frac{1}{\text{alpha}}$ (alpha is the specified detector angular subtense in the scan direction in milliradians)

with: τ = 1.25 mr

phi = 90°

3.6.7 Focusing. The viewer shall have a focusing range from 8 meters or less to infinity.

3.6.8 Scan rate. The viewer shall scan the entire 6 x 12 degrees field-of-view at a rate of 15 frames per second minimum.

3.6.9 Power consumption. The steady state power consumption of the viewer, shall be not greater than 11 watts with an input voltage of 6 volts, plus 0, minus 0.1 volt dc at plus 25°C, plus 2°, minus 4°C.

3.6.10 Audible noise. The audible noise produced during operation of the viewer, at a distance of 5 feet, plus 0.25 inch, minus 0 inch in any direction from the external surfaces of the viewer, shall be not greater than the following maximum sound pressure levels:

Frequency octave band (Hz)	Maximum sound pressure level (dB: re 0.0002 microbars)
75 - 150	58
150 - 300	42
300 - 600	33
600 - 1200	30
1200 - 4800	28
2400 - 4800	32
4800 - 9600	34

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:58Z
Check the source to verify that this is the currentversion before use.

3.6.11 Visible light. The viewer shall not emit visible light which is apparent to a dark adapted observer at a distance of 50 feet minimum in any direction from the operating viewer.

3.6.12 Weight. The total weight of the viewer; Case, Battery Power Supply CY-7537/PAS-7; and Cable Assembly shall be 12 pounds maximum.

3.6.13 Magnification. Image magnification shall be 2.3, plus or minus 10 percent.

3.6.14 Uniformity of response. Each channel amplifier shall produce an output which is within 10 percent of the median value of 96 percent of the channel outputs for an equal radiant flux on each detector and a signal to noise ratio of at least 20:1.

3.6.15 Dynamic range. The dynamic range of each signal preamplifier shall be at least 100:1. Dynamic range is defined as the ratio of Vs/Vn, where Vs is the voltage level at which a preamplifier just begins to saturate and Vn is the noise level for the same preamplifier.

3.6.16 Cross talk. The coupling between detector elements in the array, detector leads, and their associated signal processing channels, shall be such that when a detector element is irradiated and the others are not, the signal appearing at the output of any non-irradiated detector shall not be greater than 10 percent of the signal in the irradiated detector. In addition, any lead or signal processing channel carrying a signal shall not generate a signal in any other channel which is greater than 10 percent of the generating signal.

3.6.17 Seal. The viewer shall be sealed and watertight.

3.6.18 Temperature.

3.6.18.1 Operating. Viewer energized by case, battery shall operate from -32°C to +49°C.

3.6.18.2 Non-operating. The AN/PAS-7 shall withstand temperatures from minus 62°C to plus 68°C.

3.6.19 Temperature shock. Minus 54°C, plus 0°C, minus 1.5°C to plus 68°C, plus 1.5°C, minus 0°C within five minutes.

3.6.20 Altitude.

3.6.20.1 Operating. Viewer energized by case, battery shall operate up to 10,000 feet above sea level.

3.6.20.2 Non-operating. The AN/PAS-7 shall withstand altitudes up to 50,000 feet above sea level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

3.6.21 Vibration. The viewer shall withstand vibratory displacement of 0.030 inch peak to peak minimum over a frequency range of 10 to 55 Hz.

3.6.22 Humidity. The viewer shall experience no damage (see 6.3) or degradation of performance in an atmosphere with a minimum relative humidity of 93 percent.

3.6.23 Immersion. The viewer shall not have any water leakage when immersed in fresh water to a depth of 36 inches, plus 5 inches, minus 0 inch for 30 minutes minimum.

3.6.24 Electromagnetic interference. The emission of electromagnetic interference by the viewer and the susceptibility of the viewer to electromagnetic interference shall comply with the following requirements for Class No. 1D equipment in accordance with MIL-STD-461:

REQUIREMENT	DESCRIPTION
RE02, Radiated emission	0.014 to 10 GHz, Electrical field
RS03, Radiated susceptibility	0.014 to 10 GHz, Electrical field

3.6.25 Fungus. The AN/PAS-7 shall show no more than six minute unrelated spots, each not greater than 0.015 square inch in an area of sparse microbial growth (see 6.3) as evidenced by growth colonization (see 6.3) which include branching (see 6.3) and sporulation (see 6.3) on or within each cubic foot, or fraction thereof, or equipment assembly volume. Isolated instances of partial tubular germination (see 6.3) shall be included in this evaluation.

3.7 Reliability. The viewer shall have a specified mean-time-between-failure (MTBF)(θo) of 500 hours.

3.8 Government furnished equipment. Unless otherwise specified in the contract or purchase order, there shall be no Government furnished equipment provided.

3.9 Treatment and painting. Unless otherwise specified, the metallic parts of the AN/PAS-7 shall be given a treatment and painting per MIL-STD-171.

3.10 Marking. Unless otherwise specified, the AN/PAS-7 and all components shall be marked per MIL-M-13231.

3.11 Workmanship. Unless otherwise specified workmanship of the AN/PAS-7 shall conform to Requirement 9, MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspections specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Packaging inspection (see 4.8).

4.3 First article inspection.

4.3.1 Inprocess inspection prescribed by a specification or drawing. Each lot of components and subassemblies shall have all parameters examined for defects in conformance with the inspection plan in the applicable specification or on the drawing. In addition, the following inspection plans shall be applicable as listed in Table I.

TABLE I. Inprocess inspection.

Inspection	Requirement paragraph	Test paragraph
Resolution	3.6.3	4.6.3
NET	3.6.5	4.6.5
Scan rate	3.6.8	4.6.8
Uniformity of response	3.6.14	4.6.14
Dynamic range	3.6.15	4.6.15
Cross talk	3.6.16	4.6.16

4.3.2 Inprocess inspection not prescribed by a specification or drawing. Each lot of components and subassemblies not prescribed by a specification or a drawing with a specific inspection plan shall have all parameters examined for defects in accordance with the sampling plan tables of MIL-STD-105 with major defects (see 4.3.2.1) having an AQL of one percent defective combined and minor defects having AQL of four percent defective combined. General inspection level II shall be applicable to both sampling plans.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

4.3.2.1 Classification of defects for inprocess inspection not prescribed by a specification or drawing.

MAJOR

101. Performance requirements specified in notes appearing on drawings.
102. Linear or diametral tolerances of 0.002 inch or less.
103. Angular dimensions having a tolerance of 15 minutes of arc or less.
104. Machine finishes of 32 micro-inches RMS or finer.
105. Tolerances of position or form 0.002 inch or less.
106. Screw thread Class 3 or better.
107. Load requirements for springs.
108. Lubrication requirements including dry lubricant finishes.
109. Material hardness when specified on drawings.

4.3.3 Examination. Each assembled AN/PAS-7 shall be examined for defects in accordance with Table II. One or more defects shall be cause for rejection of that AN/PAS-7.

TABLE II. Examination.

Inspection	Requirement paragraph	Inspection criteria
Any part or component missing or damaged	3.3., 3.4	MIL-STD-252
Treatment and painting not as specified	3.9	MIL-STD-171
Markings not as specified or illegible	3.10	MIL-M-13231
Workmanship not as specified	3.11	MIL-STD-454

4.3.4 Tests. Upon successful completion of the inprocess inspections and assembled examination specified in 4.3 the first article AN/PAS-7 shall be subjected to the tests in Table III. Prior to start of tests, the AN/PAS-7 shall be identified as to their applicable subgroups (see 6.2). Tests shall be conducted in the order listed. Failure of any test shall constitute first article failure.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE III. First article inspection.

Inspection	Requirement paragraph	Test paragraph	Subgroup 1	2	3
Burn-in	3.6.1	4.6.1	X	X	X
Field-of-view	3.6.2	4.6.2	X		
MRT	3.6.4	4.6.4	X	X	X
Dead and noisy channels	3.6.5.1	4.6.5.1	X		
OTF	3.6.6	4.6.6	X		
Focusing	3.6.7	4.6.7	X		
Power consumption	3.6.9	4.6.9	X	X	X
Audible noise	3.6.10	4.6.10	X		
Visible light	3.6.11	4.6.11	X		
Weight	3.6.12	4.6.12	X		
Seal	3.6.17	4.6.17	X		
Temperature operating	3.6.18.1	4.6.18	X		
Temperature non-operating	3.6.18.2	4.6.18	X		
Temperature shock	3.6.19	4.6.19	X		
Altitude operating	3.6.20.1	4.6.20	X		
Altitude non-operating	3.6.20.2	4.6.20	X		
Vibration	3.6.21	4.6.21	X		
Humidity	3.6.22	4.6.22	X		
Immersion	3.6.23	4.6.23	X		
Magnification	3.6.13	4.6.13	X		
Electromagnetic interference	3.6.24	4.6.24		X	
Fungus	3.6.25	4.6.25		X	
Reliability	3.7	4.7			X

4.4 Quality conformance inspection.

4.4.1 Inprocess inspection. Inprocess inspection on the AN/PAS-7 shall be as specified in 4.3.1 and 4.3.2.

4.4.2 Examination. Each assembled AN/PAS-7 shall be examined as specified in Table II. Presence of one or more defects shall be cause for rejection of that AN/PAS-7.

4.4.3 Tests.

4.4.3.1 Group A inspection. Following successful completion of the inprocess inspection and assembled examination of 4.4.1 and 4.4.2, each viewer shall be tested in accordance with Table IV in the order listed. Failure of any test shall be cause for rejection of that unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE IV. Group A inspection.

Inspection	Requirement paragraph	Test paragraph
Seal	3.6.17	4.6.17
Burn-in	3.6.1	4.6.1
MRT	3.6.4	4.6.4
Dead and noisy channels	3.6.5.1	4.6.5.1
Focusing	3.6.7	4.6.7

4.4.3.2 Group B inspection. Group B inspection shall be conducted on viewer selected from units which have passed the tests in 4.4.3.1. Sampling of lots shall be in accordance with MIL-STD-105, AQL 2.5 percent defective, inspection level S-3 combined. Tests shall be conducted in accordance with Table V, and shall be performed in the order listed.

TABLE V. Group B inspection.

Inspection	Requirement paragraph	Test paragraph
Power consumption	3.6.9	4.6.9
Visible light	3.6.11	4.6.11

4.4.3.3 Group C inspection. Group C inspection shall be conducted on AN/PAS-7 selected from units which have passed the tests in 4.4.3.1. The sample(s) shall be subjected to the inspections specified in Table VI. Samples shall be selected in accordance with 4.4.3.3.1. Tests shall be performed in the order listed.

4.4.3.3.1 Sampling for Group C inspection.

4.4.3.3.1.1 Subgroup 1. For this subgroup 10 percent (1 minimum to 5 maximum) AN/PAS-7 shall be selected from the first quality conformance inspection production lot. For subsequent Group C inspection 10 percent (1 minimum to 5 maximum) AN/PAS-7 shall be selected every month from the monthly specified quantity (see 6.2).

4.4.3.3.1.2 Subgroup 2. For this subgroup 1 AN/PAS-7 shall be selected from the first quality conformance inspection production lot. For subsequent Group C inspection 1 AN/PAS-7 shall be selected every third month from the third monthly specified quantity (see 6.2).

4.4.3.3.1.3 Subgroup 3. For this subgroup 1 AN/PAS-7 shall be selected from every sixth quality conformance inspection lot (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

TABLE VI. Group C inspection.

Inspection	Requirement paragraph	Test paragraph
Subgroup 1		
Weight	3.6.12	4.6.12
OTF	3.6.6	4.6.6
Temperature operating	3.6.18.1	4.6.18
Vibration	3.6.21	4.6.21
Immersion	3.6.23	4.6.23
MRT	3.6.4	4.6.4
Subgroup 2		
Audible noise	3.6.10	4.6.10
Temperature non-operating	3.6.18.2	4.6.18
Temperature shock	3.6.19	4.6.19
Altitude operating	3.6.20.1	4.6.20
Altitude non-operating	3.6.20.2	4.6.20
Humidity	3.6.22	4.6.22
Subgroup 3		
EMI	3.6.24	4.6.24
Fungus	3.6.25	4.6.25
Magnification	3.6.13	4.6.13

4.4.3.3.2 Group C failures. Actions required relative to Group C failures shall be as specified in the contract or order (see 6.2).

4.4.3.4 Group D inspection. Group D inspection shall be conducted on viewer selected from units which have passed the tests in 4.4.3.1. Tests shall be conducted in accordance with Table VII.

4.4.3.4.1 Sampling for Group D inspection . The acceptance test shall be performed on the first production lot and every three months or 300 viewers thereafter, whichever occurs first. Sample size shall be at the discretion of the contractor subject to:

a. Minimum sample size of 3.
b. Maximum sample size of 6.
c. Selection of sufficient samples to ensure completion of test prior to next sampling period.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the currentversion before use.

TABLE VII. Group D inspection.

Inspection	Requirement paragraph	Test paragraph
Reliability	3.7	4.7

4.4.3.4.2 Group D failures. Actions required relative to Group D failures shall be as specified in the contract or purchase order, (see 6.2).

4.4.3.5 Reinspection of Group B, C and D sample units. Unless otherwise specified, sample units which have been subjected to and passed Groups B, C and D inspections may be accepted on contract or order provided all damage is repaired and the units are resubjected to and pass Group A inspection.

4.5 Test methods. Tests required to determine compliance with the requirements of this specification shall be conducted in accordance with the test procedures specified herein. Unless otherwise specified, the input voltage shall be 6 Vdc, ±0.2 Vdc from hard source. Unless otherwise specified all tests shall be run at 23°C, see 6.3. The AN/PAS-7 when subjected to the environmental tests used in MIL-STD-810, the term operate shall be the sloped/wire test in accordance with paragraph 4.5.1.

4.5.1 Sloped wire test. An operational detector/cooler array inspection shall be performed by viewing a heated sloped wire as shown in Figure 1. An image shall be observed as shown in Figure 2. Deviations from this image, such as more than two missing spots or spots out of line by at least the width of a spot shall constitute a failure.

4.6 Operational and environmental.

4.6.1 Burn-in. Each viewer shall be subjected to a 24 hour burn-in period composed of 3 hours ON and one hour OFF for six cycles. At the completion of the 24 hour period, a sloped wire test per 4.5.1 shall be performed. Failure to pass the requirements of 3.6.1 shall constitute failure of the burn-in.

4.6.2 Field-of-view. Two point sources of heat, each no greater than 0.5 inch in diameter, shall be placed at a distance of at least 30 feet from the system. When determining the horizontal field, the sources shall be positioned in a horizontal line and shall be separated by a distance corresponding to an angular separation of 12°, plus 1.8°, minus 0°. Inability of the two sources to be clearly visible at the right and left extremities of the display shall constitute failure. When determining the vertical field, the sources shall be positioned in a vertical line and separated by a distance corresponding to an angular separation of

Source: https://assist.dla.mil -- Downloaded: 202640-26T03:58Z
Check the source to verify that this is the currentversion before use.

6°, plus 0.9°, minus 0.3°. Inability of the two sources to be clearly visible at the top and bottom extremities of the display shall constitute failure of this test.

4.6.3 Resolution. A small heater element, used as a source, shall be placed at a distance of at least 25 feet from the viewer covered with a reflecting mask having a central circular aperture no greater than 0.1 inch in diameter. The scan mechanism of the viewer shall be de-energized and the viewer shall be focused on the heater element. The source shall be a square wave chopped at a frequency of 300 Hz, plus or minus 5 Hz within the pass band of the amplifiers of the viewer. An electrical filter shall be used at the amplifier output to limit the output signal to the fundamental frequency. The source shall be heated until the signal output of the viewer is at least 10 times greater than the noise level. The source shall be moved in two perpendicular directions and an rms voltmeter shall be used to record the signal. The points at which the signal drops to half its maximum value shall be noted. The source displacement in inches corresponding to the half-voltage points shall be taken as a measure of the resolution. The resolution shall be measured at the center of the field of view. Failure to meet the resolution requirement of 3.6.3 shall constitute a failure of this test.

4.6.4 Minimum resolvable temperature difference (MRT). The following steps shall be performed prior to the start of the test:

a. Three observers known to have good visual acuity (20/20 vision; vision corrected to 20/20 shall be acceptable) and normal color vision shall be selected.
b. A four bar square wave pattern corresponding to 3.6.4 (formed by four slits in a mask coated just in front of the target) with a bar aspect ratio of 7 to 1 and a spatial frequency of 1/2W cy/mr, where W is the angular bar width (see Figure 3), oriented perpendicularly to the scan direction at a distance greater than 25 feet, shall be viewed by means of the viewer. The target temperature shall be uniform and controlled to within $\pm$0.5°C. The mask temperature shall be maintained between 20° and 25°C. The target shall be presented to the system at a distance greater than 25 feet, either in real space or by means of a collimator. The MRT test shall be conducted as follows:
    1. The controls of the display shall be adjusted to establish an operating point by selecting a brightness and contrast setting which corresponds to a point on the linear portion of the intensity transfer characteristic of the viewer and for which noise is just discernible on the display.
    2. The lowest frequency target (with target at a temperature lower than the temperature of the mask) shall be viewed by means of the viewer. The temperature of the target shall then be slowly increased and the temperature at which the target is just discernible by an observer shall be measured.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

3. The temperature of the target shall be increased until the target is no longer discernible by the observer.
4. The temperature of the target shall then be increased again and the temperature at which the target just becomes discernible again by the observer shall be measured.
5. One-half of the temperature difference between the measurements described in (2) and (4) (delta T/2) shall be the maximum difference from ambient temperature.
6. The target frequency shall then be changed to the next highest frequency, measurements and calculations performed, and the results recorded. This procedure shall then be repeated until the high frequency to be measured has been completed. Failure to meet or exceed the maximum temperature differences associated with the proper target frequencies of 3.6.4 or any evidence of superior images, including those caused by internal reflectors or variable emission of the housing shall constitute failure of this test.

4.6.5 Noise equivalent temperature difference (NET). An in-focus test pattern shall be presented to the sensor. The square target angular size shall be at least five times alpha where alpha is the specified detector field-of-view. The signal voltage V_s (peak-to-peak) shall be measured using a oscilloscope or another recorder, and the noise voltage V_n shall be measured using an rms voltmeter. The NET is given by $T(V_n/V_s)$. Failure to comply with the NET requirement of 3.6.5 shall constitute a failure of this test.

4.6.5.1 Dead and noisy channels. The number of channels that are inactive or whose NET exceeds 0.18°C shall be determined during performance of the NET test. Failure to comply with the requirements of 3.6.5.1 shall constitute failure of this test.

4.6.6 Optical transfer function (OTF). The OTF of the viewer shall be measured while viewing a hot wire with a width no greater than 0.1 mr oriented perpendicularly to the scan direction at a distance greater than 25 feet. A photo-optically corrected scanning-slit micro-photometer focused on the display shall be used to measure the line spread function (LSF) and the normalized Fourier Transform shall be taken to yield the OTF. Perform the following steps comprising the OTF test:

a. Calibrate all measuring devices.
b. Measure the system signal transfer functions (SITF) for several useful settings of the display controls.
c. From the measured SIFT select the display control settings which have quasi-linear operation for the target and background temperatures to be used.
d. Measure the OTF of the entire photometric measurement set by inputting a slit function to the photometer and transforming it. Compensate the measured system OTF for the photometer OTF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

e. Determine the experiment scale factor (mm at target/mm at scanning slit).
f. Pick an approximate delta T = Target Delta T multiplied by the detector angular subtense/target angular subtense within the quasi-linear region which also gives a high signal-to-noise ratio (at least 10).
g. Align (in the direction perpendicular to the scan) the target assembly, the system, and the photometric microscope using levels and inspection. Select a portion of the image plane for the measurement.
h. Measure and Fourier transform the LSF. Compensate the measured OTF for the OTF of the measuring devices and for the finite frequency spectrum of the line source. Failure to comply with the OTF requirement of 3.6.6 shall constitute a failure.

4.6.7 Focusing. With the FOCUS lever at FAR(∞) position and a target at a distance of at least 70 meters observe whether the target appears in focus on the display. Move FOCUS lever to the NEAR (8m) position, observe whether a target at 8 meters or less appears in focus on the display. Failure to comply with the requirement of 3.6.7 shall constitute failure of this test.

4.6.8 Scan rate. By means of an oscilloscope, measure the period of the horizontal triangular wave required for the generation of one scan. Calculate the frequency in frames per second. Failure to demonstrate a scan rate of 15 frames per second minimum shall constitute a failure of 3.6.8 and this test.

4.6.9 Power consumption. Input voltage of 6, plus or minus 0.1 Vdc at 25°C, plus 2°C, minus 4°C shall be measured. Power consumption shall be calculated. Failure to comply with the requirement of 3.6.9 shall constitute failure of this test.

4.6.10 Audible noise. The viewer shall be set up for operation in an open area where the background noise level is at least 10 decibel (dB) below the sound level to be measured. The viewer shall then be placed in operation and sound pressure measurement made at distances of 5 feet, plus 0.25 inch, minus 0 inch in any direction from the external surfaces of the viewer. Measurement shall be made with an octave band analyzer whose characteristics comply with ANSI Specification Z24: 10-1952. Failure to comply with the audible noise requirement of 3.6.10 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.6.11 Visible light. The visible light test shall be conducted under a moonless night-time condition (not more than 10^{-3} footcandles). An observer shall have 20/20 vision (vision corrected to 20/20 shall be acceptable), normal color vision, and shall undergo dark adaption for not less than 30 minutes prior to making the observations. An area shall be selected for the test which provides for unobstructed view in all directions from the viewer. The viewer shall be observed to determine if any light is visible to the observer at any position on a circle having a radius of at least 50 feet from the operating viewer. Failure to comply with the visible light requirement of 3.6.11 shall constitute a failure of this test.

4.6.12 Weight. Place the viewer, case, battery power supply CY-7537/PAS-7, and cable assembly on a balance and measure the weight. Weight in excess of the requirements in 3.6.12 shall constitute a failure of this test.

4.6.13 Magnification. When the field-of-view inspection described in 4.6.2 has been completed and it has been determined that the viewer can display a vertical field of 6°, plus 0.9°, minus 0.3° the eyepiece assembly shall be removed and the height of the display on the cathode ray tube faceplate shall be measured. The apparent field-of-view of the eyepiece shall then be derived as twice the angle whose tangent is one half the display height divided by the eyepiece focal length. Viewer magnification is the apparent field-of-view divided by 6°. Failure to comply with the requirement of 3.6.13 shall constitute a failure of this test.

4.6.14 Uniformity of response. The scanner shall be disabled by physically stopping the scanner from moving. An extended source of uniform temperature shall be placed so that it encompasses the field-of-view of all detector elements. The source shall be chopped a 300 Hz, plus or minus 5 Hz. The temperature of the source shall be adjusted to produce a signal to noise ratio of at least 20:1. The output of each preamplifier shall be measured by connecting each preamplifier sequentially to an rms voltmeter. Failure to comply with the requirement of 3.6.14 shall constitute a failure of this test.

4.6.15 Dynamic range. An infrared source shall be placed at least 25 feet from the viewer. An oscilloscope shall be connected to the output of five randomly selected signal preamplifiers. The temperature of the target shall be raised until the pattern on the oscilloscope begins to saturate. The saturation voltage level shall be measured with the oscilloscope (and the peak value converted to an rms value V_s) and the noise level V_n shall be measured with an rms voltmeter. Dynamic range (D_r) shall be calculated $D_r = V_s/V_n$. Failure to comply with the requirement of 3.6.15 shall constitute a failure of this test.

4.6.16 Cross talk. Using the same procedure of 4.6.14 and with an infrared source, covered with a reflective mask having a central circular aperture not greater than 0.05 inch in diameter, placed at a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

distance of at least 25 feet from the viewer, the image of the source shall be focused on one element of the detector. The source heated to provide a signal output for that channel at least 10 times greater than the noise level. Measure the signal level on the two channels adjacent to the channel being energized. Failure to comply with the requirement of 3.6.16 shall constitute a failure of this test.

4.6.17 Seal. Pressurize the viewer with dry nitrogen gas, using the pressurizing valve, to an internal pressure of at least 3 psig. Immerse the viewer in water to a depth of 1 foot minimum for a period of 5 minutes minimum and observe the viewer to determine if there are any gas bubbles escaping. Presence of escaping gas bubbles shall constitute a failure of 3.6.17 and this test.

4.6.18 Temperature.

4.6.18.1 High temperature. The viewer shall be subjected to test in accordance with Method 501, Procedure I of MIL-STD-810. Temperature for Step 2 shall be plus 68°C. Temperature for Step 4 shall be plus 49°C. Failure to operate or pass inspection of MIL-STD-810 shall constitute a failure of this test.

4.6.18.2 Low temperature. The viewer shall be subjected to test in accordance with Method 502, Procedure I of MIL-STD-810. The temperature for Step 2 shall be minus 62°C and shall be maintained until temperature stabilization of the test item is reached. The temperature for step 4 shall be minus 32°C. Failure to operate or pass inspection of MIL-STD-810 shall constitute a failure of this test.

4.6.19 Temperature shock. The viewer shall be subjected to test in accordance with Method 503, Procedure I of MIL-STD-810. The maximum temperature for steps 1 and 4 shall be plus 68°C. Failure to operate or pass inspection of MIL-STD-810 shall constitute a failure of this test.

4.6.20 Altitude. The Infrared Viewer shall be subjected to test in accordance with Method 500, Procedure I of MIL-STD-810. The ambient temperature of the chamber for Step 3 shall be minus 32°C. The operating time for Step 3 shall be four hours. Failure to operate or pass inspection of MIL-STD-810 shall constitute a failure of this test.

4.6.21 Vibration. The viewer shall be subjected to a simple harmonic motion having a vibratory displacement of .030 inch minimum peak to peak, with the frequency being changed in discrete steps of 1 Hz and maintained at least 10 seconds at each frequency over the frequency range of 10 to 55 Hz. Failure to operate (4.5.1) shall constitute failure of this test.

4.6.22 Humidity. The viewer shall be subjected to test in accordance with Method 507, Procedure II of MIL-STD-810. Operation required by MIL-STD-810 during the last five hours of each 48 hour test cycle shall be the sloped wire test per 4.5.1. Failure to operate or pass inspection of MIL-STD-810 shall constitute a failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

4.6.23 Immersion. The viewer shall be subjected to test in accordance with Method 512, Procedure I of MIL-STD-810. Failure to comply with the requirement of 3.6.23 shall constitute failure of this test.

4.6.24 Electromagnetic interference. The viewer shall be inspected in accordance with Methods RE02 and RS03 of MIL-STD-462. Failure to comply with the requirements of 3.6.24 shall constitute a failure of this test.

4.6.25 Fungus. The viewer shall be subjected to test in accordance with Method 508, Procedure I of MIL-STD-810. Failure to comply with the requirement of 3.6.25 shall constitute a failure of this test.

4.7 Reliability.

4.7.1 Reliability test. The reliability tests shall be conducted in accordance with Test Plan IVa of MIL-STD-781. The specified MTBF (θ_o) shall be 500 hours.

4.7.2 Test conditions. The reliability tests shall be conducted under those conditions prescribed by Test Level B of MIL-STD-781 except the equipment ON-OFF cycling shall be as specified below. After the equipment ON test have stabilized to the test chamber temperature of 40°C, plus or minus 5°C, a test operating cycle shall be as follows: Turn the unit "ON" and allow to temperature stabilize for one and one-half hours operate for an additional 3 hours, then turn "OFF" for a period of one and one-half hours. Vibration shall be performed for a period of 10 minutes out of every hour of equipment ON-time. A sloped wire test of 4.5.1 shall be performed at least once each 24 hours. The test operating cycling shall be repeated as necessary. Failure to comply with 4.7.1 shall constitute reliability failure.

4.7.3 Failure definition. A failure is defined as any malfunction which causes inability to commence operation, cessation of operation, degradation of performance below the specified performance levels, or serious personnel safety hazards.

4.8 Packaging inspection. The inspection of the preservation-packaging and interior package marking shall be in accordance with the group A and B quality conformance inspection requirements of MIL-P-116. The inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B or Commercial, as specified (see 6.2).

5.1.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5.1.1.1 Cleaning. Viewer, Infrared AN/PAS-7 shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Viewer, Infrared AN/PAS-7 shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservation application. None required.

5.1.1.4 Unit packing. Unit packing shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical literature. Each technical literature shall be packaged method IC-1.

5.1.1.4.2 Viewer, Infrared AN/PAS-7. Each Viewer, Infrared shall be individually unit packed method III as follows: Position each item in recesses provided in transport case. Close the cover and secure the fasteners. Cushion the transport case on all surfaces with cells or pads or both fabricated of fiberboard conforming to PPP-F-320, type CF, class weather resistant, variety SW, grade W5c, designed to protect all projections and absorb the shock of impact in handling and transit. As an alternate, cushioning material may be fabricated of plastic molding material conforming to MIL-P-19644 or polyurethane foam conforming to MIL-P-26514. Place each cushioned unit within a close-fitting fiberboard box conforming to PPP-B-636, W5c. Place the technical literature, packaged as specified in 5.1.1.4.1, on top of the contents, directly under the lid of the box. Close the box in accordance with appendix of the box specification.

5.1.2 Level B.

5.1.2.1 Cleaning, drying, preservative application unit packing. Each Viewer, Infrared shall be cleaned, dried, preserved and unit packed as specified in 5.1.1.

5.1.3 Commercial. Preservation shall be in accordance with FED-STD-356.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6. 2). Shipping containers for level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of Viewer, Infrared unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, class 2; or PPP-B-585, style 2 or 3, class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4 inch skids, laid flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, type I, finish A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

5.2.1.1 Unitization. Palletization shall be required when: containers specified in 5.2.1 do not require skids; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers packed as specified in 5.2.1, except that container strapping may be omitted, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.2 Level B. A quantity of Viewer, Infrared unit packed as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather-resistant, variety DW. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure-sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

5.2.2.1 Unitization. Palletization shall be required when quantities per destination comprise a pallet load. A quantity of Viewer, Infrared unit packed as specified in 5.1, shall be placed on a pallet, load type 1, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film.

5.2.3 Commercial packing. Packing shall be in accordance with FED-STD-356.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with FED-STD-356.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The AN/PAS-7 is intended for use by the individual soldier, in the early detection (see 6.3.2) and recognition (see 6.3.1) of military targets, such as a standing soldier.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Levels of preservation-packaging and packing required (see 5.1 and 5.2).
c. The necessary tests to verify compliance with the prohibition of radioactivity in optical elements.
d. When first article tests are to be conducted and the number of AN/PAS-7 in each subgroup (see 3.2, 4.3 and Table III). Time frame required for submission of first article test reports and time frame required for approval of first article test reports by the contracting officer.
e. Actions required related to Group C and D failures.

6.3 Definitions.

6.3.1 Recognition. Discrimination between target objects as to class, for example: truck, tank, man.

6.3.2 Detection. Indication of the presence of a target of potential military interest in a reasonable time, but without recognition of the target.

6.3.3 Minimum resolvable temperature difference (MRT). MRT is the lowest equivalent thermal difference between a target and its background at which a target of a fundamental bar spatial frequency can be resolved by an observer with 20/20 vision (vision corrected to 20/20 shall be acceptable) and normal color vision with unlimited viewing time.

6.3.4 Damage.. Breakage, loosening, shifting, evidence of corrosion, or failure of any finish, hardware, connection or component; leakage or condensation of moisture within the viewer; any degradation in input or output characteristics, and any failure of the control knobs to perform their function.

6.3.5 Microbial growth. Microbial growth of very minute organisms. Such organisms when present in large numbers may provide a colony visible to the naked eye.

6.3.6 Growth colonization. Growth colonization is a mass of individual plants, generally of one species, living together; or a group of hyphae which is formed from one spore or cell and may be one individual plant. Colonization which completely covers the surface of the nutrient material constitutes abundant growth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

6.3.7 Branching. Branching is a connected arrangement of filaments (hyphae) formed by shoots on secondary stems growing from the main stem or filament (hypha).

6.3.8 Sporulation. Sporulation is the formation of minute unicellular reproductive or dormant bodies, called spores.

6.3.9 Tubular germination. Tubular germination is partial growth by the production of hyphae, which are tubular shaped fungal filaments. Tubular germination constitutes restricted individual spore growth not proceeding to colonization.

6.3.10 Room temperature. Room temperature is defined as +23°C, ± 3°C.


Custodian:
Army - EL

User Activity:
Army - MU

Preparing Activity:
Army - EL

Project No. 5855-A095

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

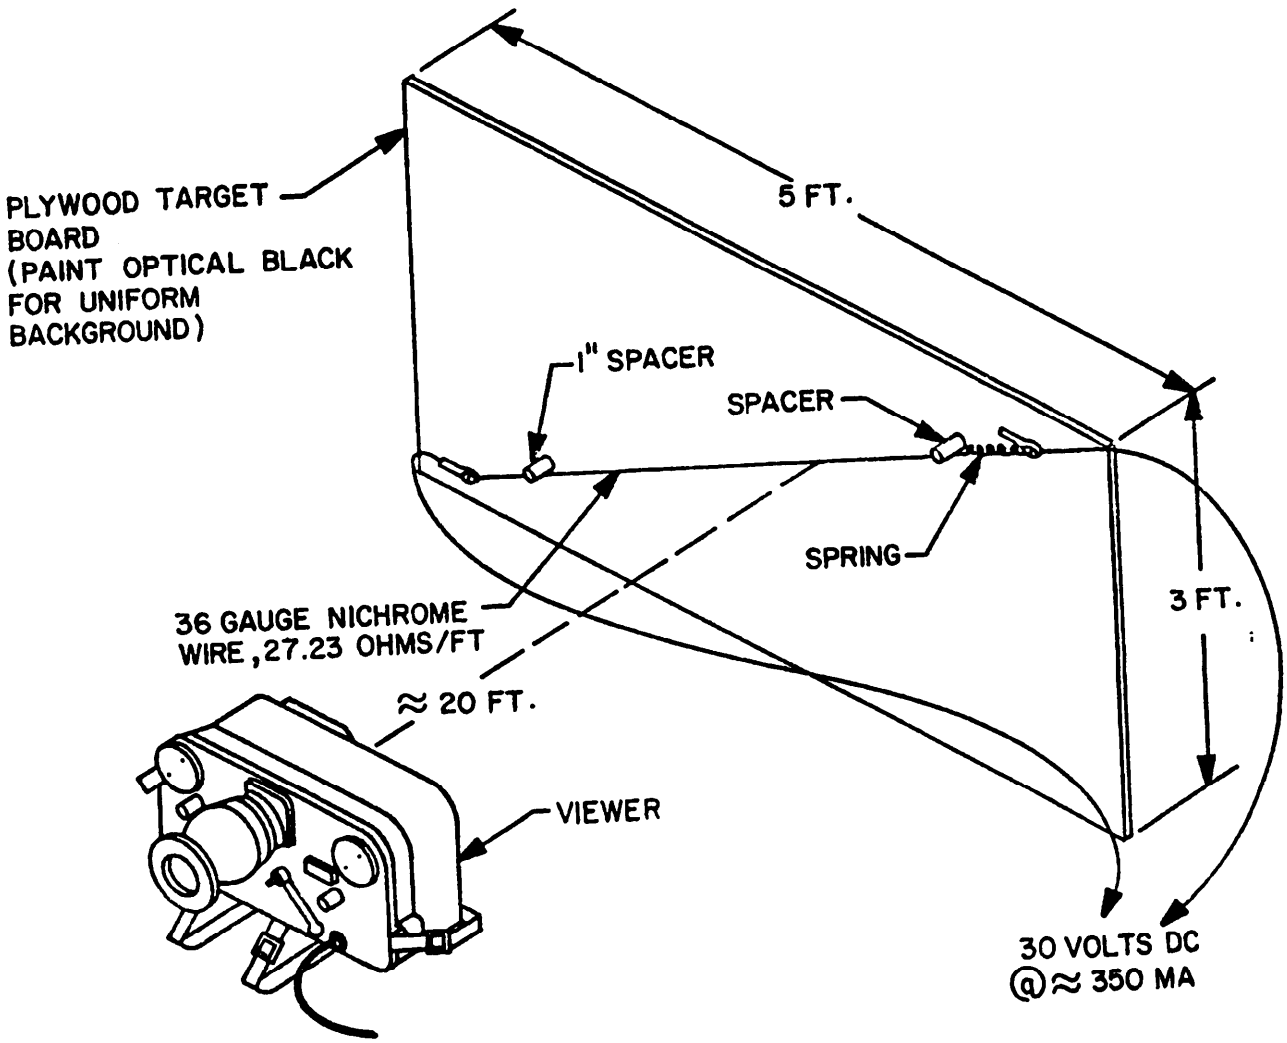

VIEWER AN/PAS-7

FIGURE 1 SLOPED WIRE TEST SET-UP

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:58Z
Check the source to verify that this is the current version before use.

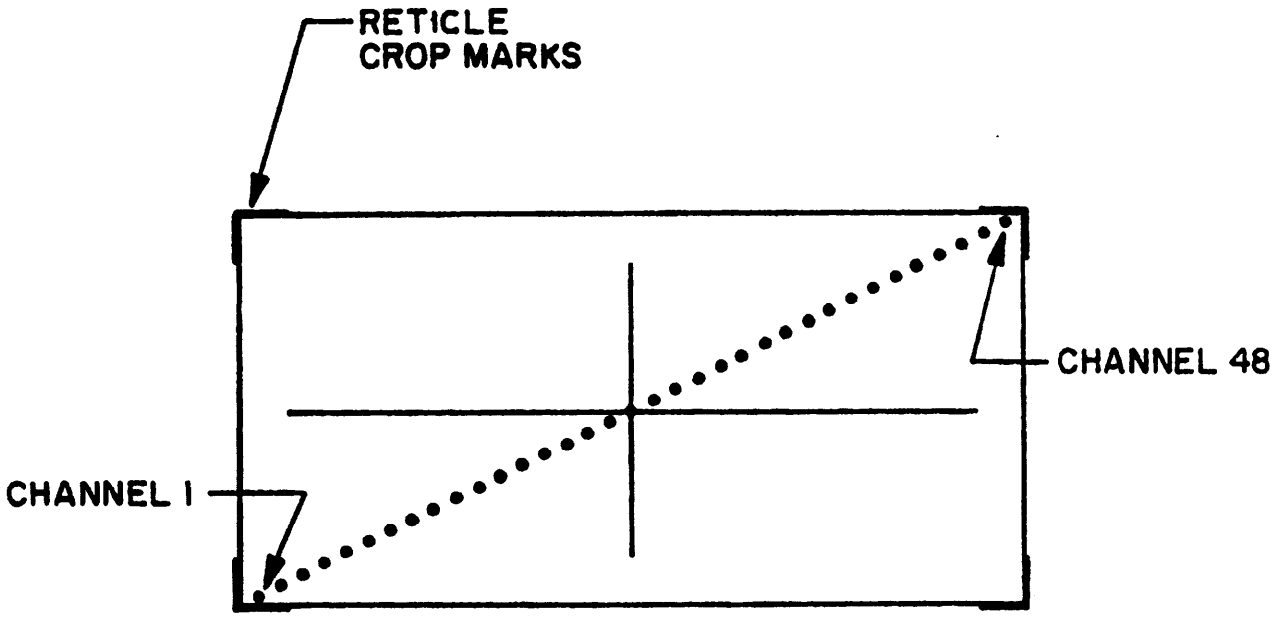


FIGURE 2. NORMAL SLOPED WIRE DISPLAY IMAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

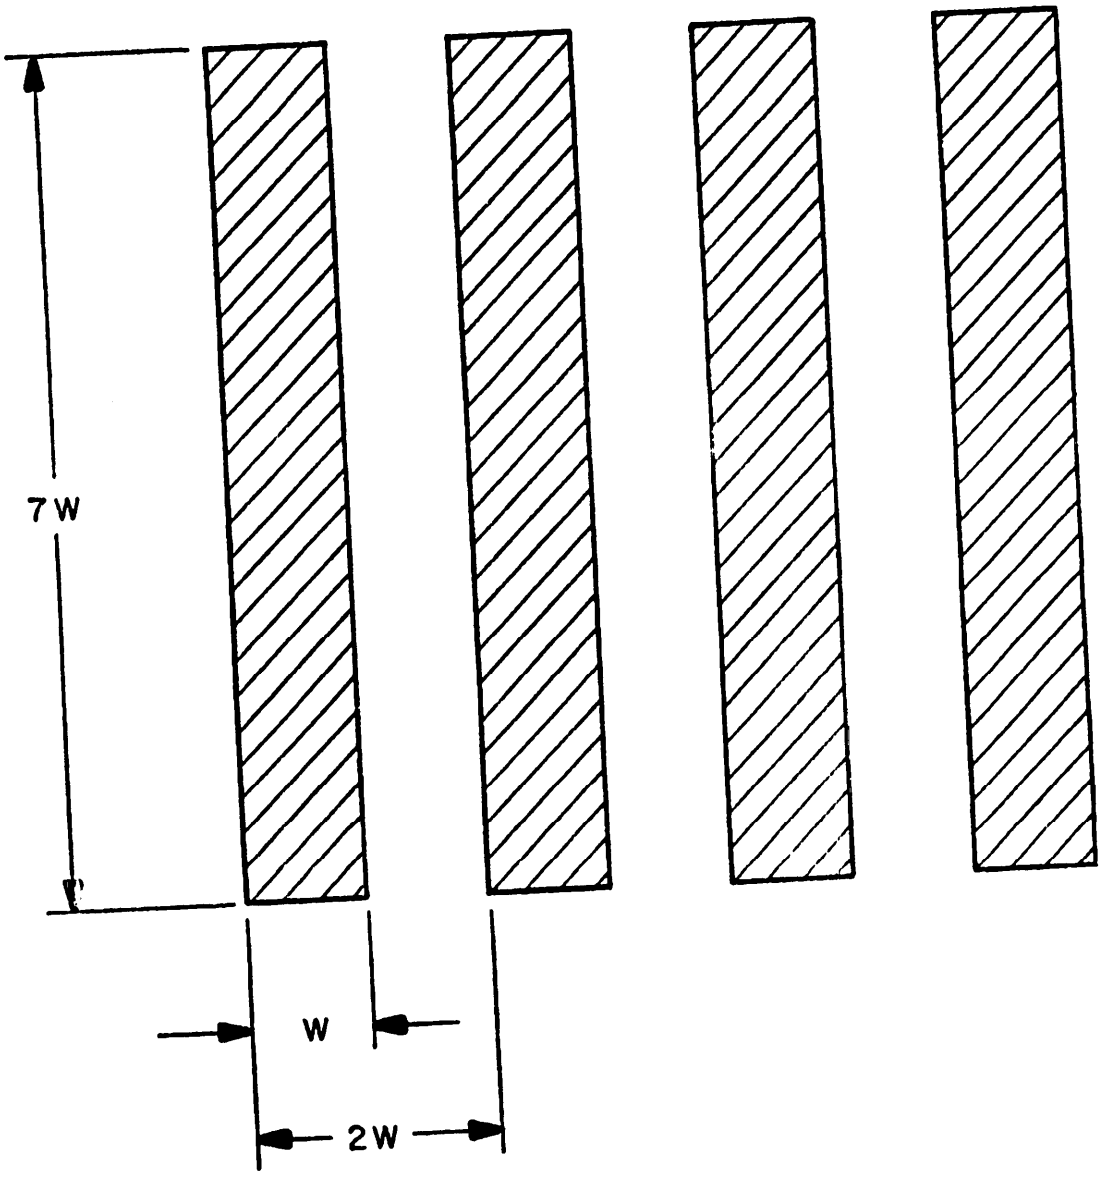


FIGURE 3
FOUR BAR SQUARE WAVE PATTERN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-V-49074(EL) VIEWER, INFRARED AN/PAS-7

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:58Z
Check the source to verify that this is the current version before use.